
Access through Roof, Wall, Floor and Ceiling

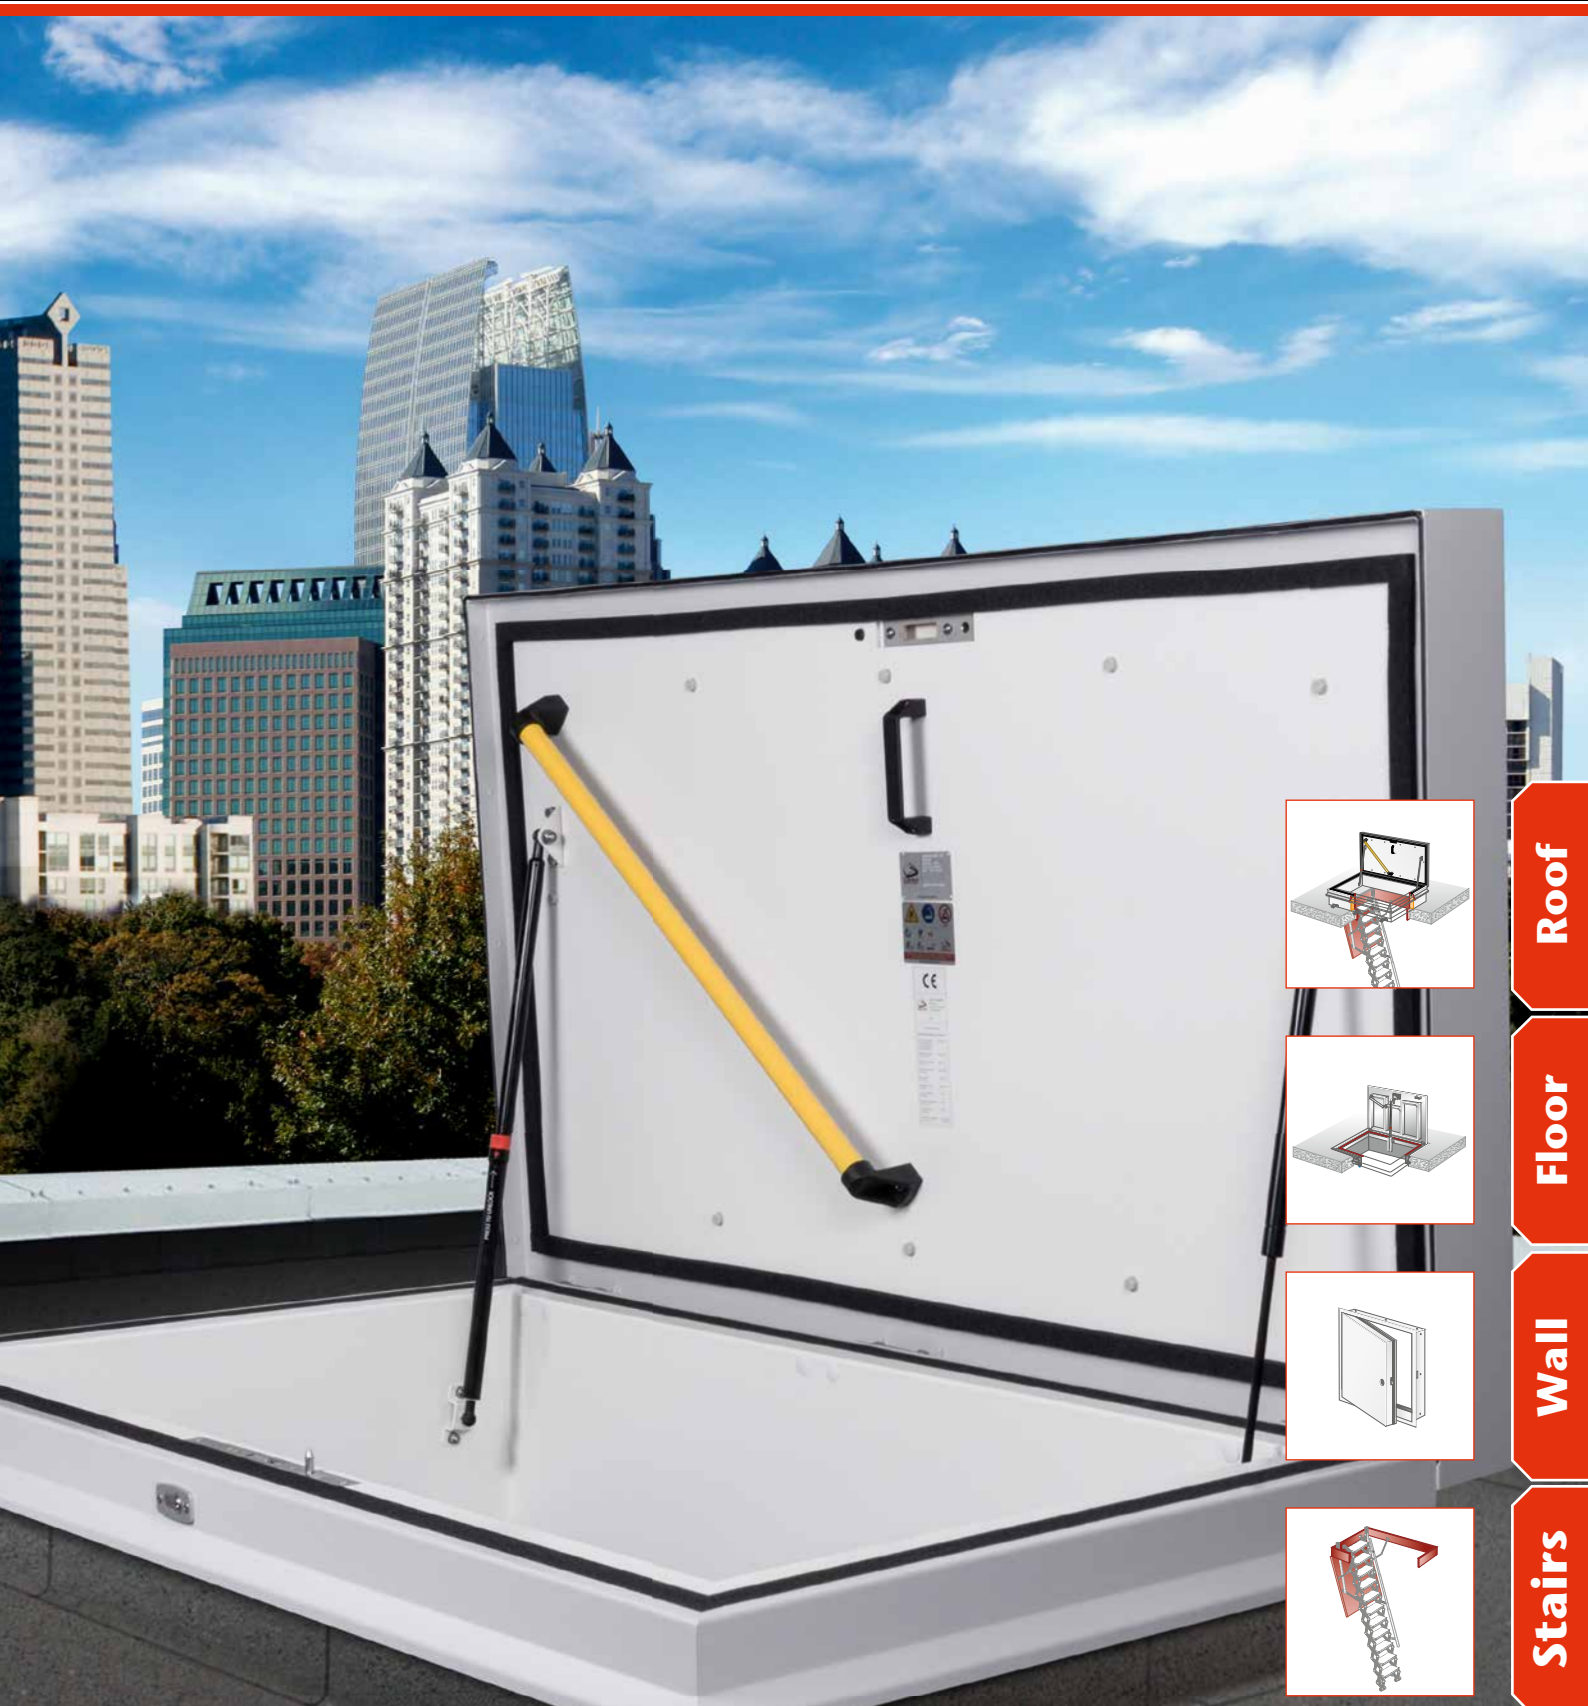

Roof

Floor

Wall

Stairs

Gorter® Premium Products, Safe Access, Proven Design

Introduction

Access through roof, wall, floor and ceiling

Gorter, since 1928
Gorter Group started life as a manufacturer of metal window and door frames in 1928. Throughout the nineties, Gorter began to specialize in safe access solutions through roof, floor, wall and ceiling cavities. Gorter is now considered one of the world's leading manufacturers and suppliers of access products and the Gorter trademark is recognized as a sign of quality in building industries around the world. Gorter Group is represented in Europe, Australia, New Zealand, Asia and the Middle East.

CE
On all Gorter RHT, RHTG and RHTEP hatches an application for European Technical Approvals (ETA-15/0338, ETA-18/0287 and ETA-18/0831) have been lodged. The granting of an ETA is the base for CE marking. The CE mark is accepted throughout the European Union.

Insulation
Gorter roof hatches are the only ones in the roof access category with a proven high insulating value. An independent bureau has tested and confirmed the thermal performance according to EN ISO 10077-2.

Safety
Safety is approved according to International Health and Safety Regulations, EN1050, EN-ISO14122, EN131 and NEN2484 by Aboma, a qualified and licensed safety approving institution. The reports are useful documents in the risk and safety analysis of a building.

Safe access and more
Not only do Gorter access products provide safe, convenient access to a variety of spaces, they can be complemented with added option features such as explosion relief, fire rating, glazing, acoustic damping, electric operation and are available in a range of standard and custom sizes, materials and finishes.

Fire rating
The fire resistance has been assessed by Efectis in accordance with EN 1634-1, EN 13501-2, AS1530-4 and BS476: part22.

Quality
Gorter is an EN-ISO-9001: 2008 certified company.

General performance
The general performance is tested by Stichting Kwaliteit Gevelbouw (SKG) in Wageningen (NL). SKG is an European Notified Body No. 0960, accredited by the Dutch Accreditation Council according to ISO/IEC17025:2005 and EN45011:1998. All RHT roof hatches and combinations are certified by TÜV NORD.

Performance		RHT	RHTG
Insulation value (EN-ISO 10077-2)	:	$U_w \leq 0{,}319$ W/(m².K)	$U_w \leq 0{,}83$ W/(m².K) HR+++ glass: U ≤ 0,500 W/(m².K)
Acoustic damping (EN-ISO 717-1:2013)	:	26 dB	27 dB
Watertightness (EN 12208)	:	Class E 650	Class E 650
Resistance to permanent loads (Eurocode EN 1993-1-1)	:	1050 kg/m²	-
Air tightness (EN 1026)	:	0,5 m³/hm¹	0,5 m³/hm¹
Resistance to wind load (EN 12210)	:	Class E 3000	Class E 2400
Resistance to snow loads (EN 1991-1-3)	:	3,97 kN/m²	5 kN/m²
Impact hard body (EN 13049)		Class P5A	-
Impact soft body (EN 13049)	:	Class 5	Class 3
Air permeability (EN 12207)	:	Class 3	Class 4


Roof hatches

Access to flat roof spaces require optimal safety


International safety regulations limit, and in some cases even forbid, the use of ladders on the exterior facade of a building. Access to roof spaces higher than 10 meters with an exterior ladder is no longer permitted due to safety concerns. The safest and most convenient way to access the roof is by using the existing stairs or lift in the building to reach the top level, and ascending the last few meters with a safe and convenient to use interior access ladder/stair and roof hatch combination.




Safety of a Gorter roof hatch



» *Single hand operation*
» *Locks in open position*




» *A safety handrail provides support during operation*



» *Closed cover eliminates danger of falling through open roof cavity*
» *Cylinder lock with 3 point latch*
» *Whole construction thermal Insulated*

Installation

» Concrete timber and steel roof
» Roof pitch up to 30°

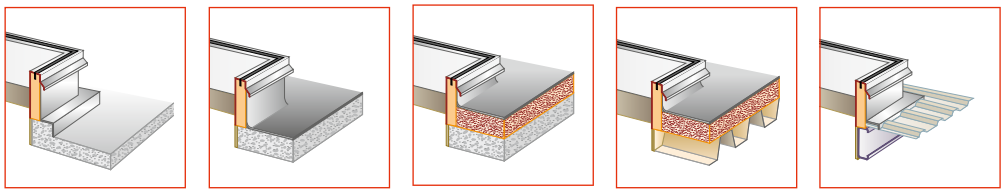

ETA-15/0338




Robust and reliable

» Whole construction thermal insulated
» Durable wind and weather proof finish
» Flexible gasket seal between curb and cover
» Stainless steel hinges
» Cylinderlock with Eurocylinder
» Larger sizes with three point latch (>1500 mm)
» Curb included
» Aluminium construction anodized and powder coated
» Suitable for coastal environments
» Patent no. 2519072

Roof hatches - standard design and sizes

Standard aluminium roof hatches RHT

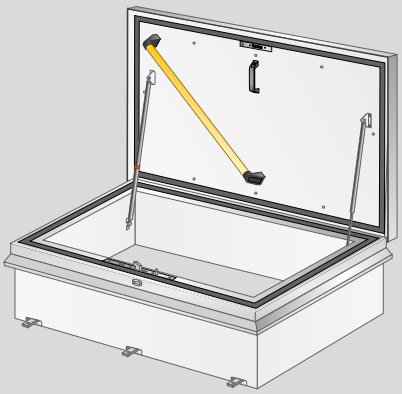


Type	Passage in mm [1]	Weight
RHT7090	700 x **900**	38 kg
RHT7010	700 x **1000**	52 kg
RHT9090	900 x **900**	44 kg
RHT7014	700 x **1400**	52 kg
RHT1010	1000 x **1000**	50 kg
RHT1015	1000 x **1500**	65 kg
RHT1020	1000 x **2000**	82 kg
RHT9024	900 x **2400**	89 kg

1) Hinge side is noted in bold.

- Thermal insulated
- $U_w \leq 0{,}319$ W/(m².K)
- In aluminium
- Burglary resistance

Exterior	Interior
RAL 7047	RAL 9010

Standard glazed roof hatches RHTG [2]

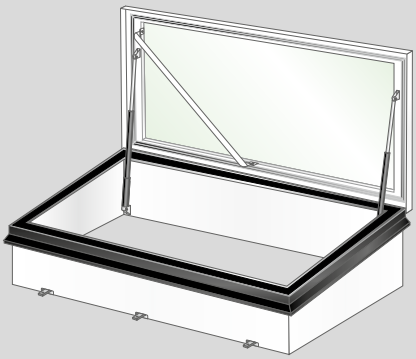

Type	Passage in mm [1]	Weight
RHTG1015	1000x **1500**	163 kg
RHTG9024	900x **2400**	221 kg
RHTG9030	900x **3000**	268 kg

Exterior	Interior
RAL 9005 / RAL 9010	RAL 9010

- Thermal insulated
- HR+++ insulation glass [3]
- $U_w \leq 0{,}83$ W/(m².K)
  HR+++ glass: $U \leq 0{,}500$ W/(m².K)
- In aluminium
- Burglary resistance
- Safety glass and Self cleaning
- 2 powerful electric motors


1) Hinge side in bold. 2) We do not recommend combinations of glazed roof hatches with scissor stairs.
3) Do NOT walk on the glass.

Finish

Powder coated in two tone colour, with a cured dry layer thickness of 80 microns. Before powdercoating, a special surface protection layer is applied. Hatches are suitable for external exposure in coastal environments, and are highly resistant to corrosion from harsh conditions, such as high sun/wind/rain exposure environments.



Roof hatch RHTEP - Energy performance

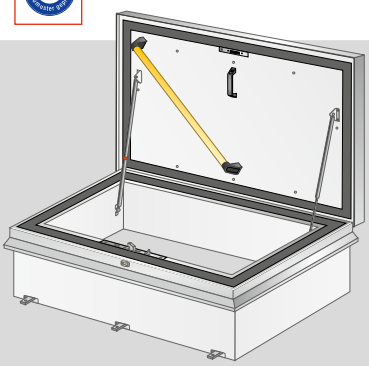

Type	Passage in mm [1]	Weight
RHTEP7014	700x **1400**	68 kg
RHTEP1015	1000x **1500**	82 kg

1) Hinge side in bold.

Exterior	Interior
RAL 7047	RAL 9010

- Thermal insulated
- $U_w \leq 0{,}20$ W/(m².K)
- Sound reduction ≥ 26 dB
- In aluminium
- Resistance to snow loads 3.97kN/m²
- Resistance to permanent loads: 1050 kg/m²
- Burglary resistance


Options

- Electric control

Roof hatches - special designs

Roof Hatch, 120 min. fire rated

EN 1634-1 | EN 13501-2 | BS 476 | AS 1530-4

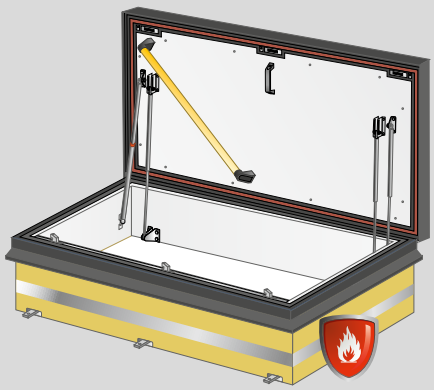


Type	Passage in mm [1]	Weight
RHTEI7090	700 x **900**	134 kg
RHTEI9090	900 x **900**	157 kg
RHTEI7014	700 x **1400**	185 kg
RHTEI1010	1000 x **1000**	180 kg
RHTEI1015	1000 x **1500**	236 kg
RHTEI1020	1000 x **2000**	298 kg

Exterior	Interior
RAL 7011	RAL 9010

1) Hinge side in bold.

- Fire rating class according to EN1634-1, EN13501-2, AS1530-4 and BS476:part22
- E:120 minutes, EI_1:120 minutes, EI_2:120 minutes
- KOMO:SKG.0372.0489
- Efectis-R001575
- In steel
- Maximum dimensions: 1000 x 2000 mm
- TÜV SUD PSB CLS1B 170697595001
- **Close fire doors after use and keep closed!**

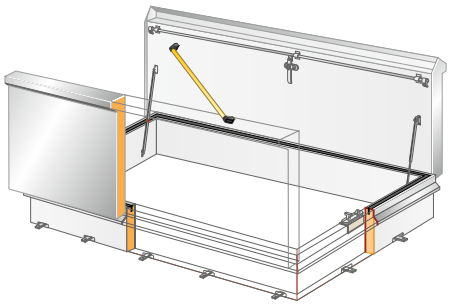


Roof hatches - special sizes

- Constructed from aluminium and thermal insulated
- Sizes up to approx. 4500 x 1200 mm will be supplied with single cover (>3000 mm with electrical operation).
- Larger sizes will be supplied with two flat (or optionally inclined) covers
- Unless otherwise specified, the longest side will be the hinge side
- Fully assembled curb included for easy installation
- Larger roof hatches with single lid are provided with a two or three point latch
- Roof hatches with two covers only with two point latch

RHT liftable hatch

- Gorter liftable hatches are fitted with two or more lids depending on the dimensions.
- The hatches do not have hinges but can be lifted with a crane by means of the lifting eyes (4 per hatch).
- When the lids are removed, there is a clearance in the roof through which material can be brought inside.
- The lifting hatches can be used on flat roofs.

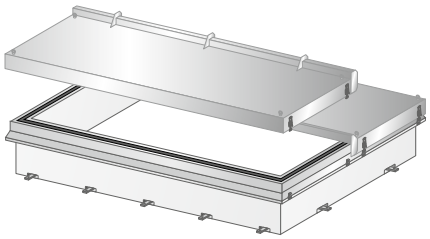



Roof hatch as an explosion vent - RHTX

Roof hatches type RHT1010, RHT1015 and RHT1020 can be equipped with an Explosion Release Control (ERC), patent no. 1870542. The ERC releases if the pressure on the inside cover exceeds approx. 100 kg force (Report Institute for Atomic and Molecular Physics, AMOLF, Amsterdam). The explosion venting roof hatch is only available in aluminium. Always keep vent opening free on both sides from obstacles that might obstruct performance.

- Actual standard: EN1991-1-7:2006
- The vent opening must be calculated by a recognized and specialized building and construction engineer

Acoustic damping

- Standard sound reduction: 26 dB

Burglary resistant

Roof hatches can be supplied with extra security features such as a burglary resistant cylinder lock or high strength stainless steel construction. A Burglary resistant cylinder lock offers increased protection according to EN1303 and EN12209. Roof hatches >1500 mm will be supplied with a three point lock. Roof hatches in stainless steel are also an option.

SKG-IKOB Certificatie




Gorter®

Gorter safe access combinations

Gorter patented access combinations consisting of a roof hatch and ladder/stair are certified safe. Safety reports, available as a document, substantiate the safety of Gorter roof access solutions and can be used as proof of compliance for any required Risk Inventory and Evaluation.



Gorter combination: roof hatch + scissor stairs (attic ladder)

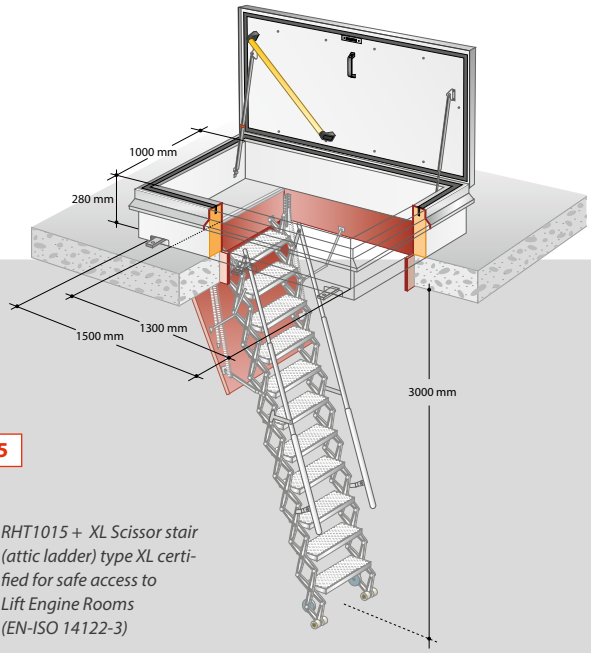

5

» *RHT1015 + XL Scissor stair (attic ladder) type XL certified for safe access to Lift Engine Rooms (EN-ISO 14122-3)*

	Type	Passage in mm [1]	Stairs type	Structural opening in mm
1	RHT7090	700 x **900**	Small	700 x 900
2	RHT7010	700 x **1000**	Small	700 x 1000
3	RHT7014	700 x **1400**	Large	700 x 1200
4	RHT7014	700 x **1400**	Large electric [2]	700 x 1200
5	RHT7014	700 x **1400**	Large EI-60 [3]	700 x 1200
6	RHT1015	1000 x **1500**	XL	1000 x 1300

1) Hinge side is noted in bold. 2) 230 Vac, including control unit and wireless RF remote control. 3) Fire rating EI-60 (60mins).


» *All scissor stairs are TÜV NORD certified according to EN 14975:2010*

» *Scissor stairs Large EI60: KOMO:SKG.0372.0457*

» *Fire rating class according to EN 1634-1*


For more information about scissor stairs and the extension of scissor stairs see pages 16 to 18.

1




» *RHT7090 + Small*

2 3



» *RHT7014 + Large*

4




» *RHT7014 + EI-60*
Fire rating class EI-60

Plenum extension of scissor stairs for suspended ceiling applications

Type Large, EI-60 and XL can be safely extended to bridge the distance between a suspended ceiling and a roof hatch.

» Dutch patent no. 2000298

» Type Small, EI60 and Large Electric are not extendable



» *Extension of sc[illegible]irs*










Gorter combination: roof hatch + safety hook-on ladder

All Gorter roof hatches can be safely combined with a Gorter safety hook-on ladder. During use, the Gorter safety hook-on ladder, type EL (single) or OL (double/triple), is hooked over a fixed anti-skid step mounted in the ceiling/roof cavity.

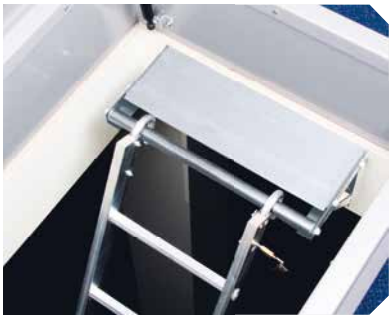


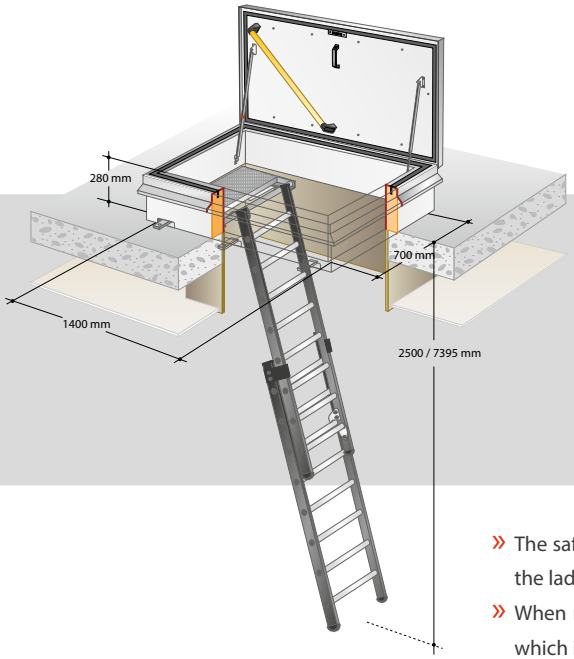

ETA-15/0338 · EN 131-2



» *Wall mount brackets*




» *Hook-on system with padlock provision*

- » The safety hook-on ladder is equipped with padlock provision (padlock not included) to allow the ladder to be locked into place to prevent unauthorized removal or slipping whilst in use
- » When not in use, the ladder can be hung on two wall suspension brackets (included), one of which is equipped with padlock hasps to prevent theft/unauthorized use
- » Ladders are manufactured from anodized aluminium and fitted with anti skid treads

Gorter combination: roof hatch + fixed step ladder

Gorter fixed step ladders are designed for use in combination with a roof access hatch. Gorter fixed step ladders are suitable for all applications requiring safe access to a roof/ceiling space by a step ladder or stairway. Please contact your local office to confirm compliance with local building codes and laws.



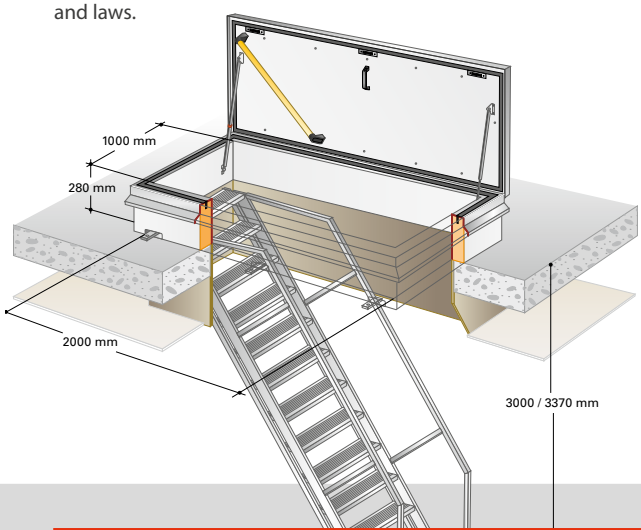

- » Designed to have a modern, aesthetically pleasing appearance
- » Easy to assemble on site
- » Depending upon the situation, the slope can be adjusted from 55° - 65°
- » Anti-skid steps as a standard
- » Anodized aluminium
- » GS55: Dutch patent no. 2007133

ETA-15/0338

Roof Hatch Type	Passage in mm [1]	Step ladder type
RHT1015	1000 x **1500**	GS50 [2]
RHT1020	1000 x **2000**	GS50 [2]/GS55 [3]
RHT9024	900 x **2400**	GS50 [2]/GS55 [3]
RHTG1015	1000 x **1500**	GS50 [2]
RHTG9024	900 x **2400**	GS50 [2]/GS55 [3]
RHTG9030	900 x **3000**	GS50 [2]/GS55 [3]




1) Hinge side is noted in bold.
2) Floor to Roof height GS50 : 2500 mm (50°) - 3000 mm (66°)
3) Floor to Roof height GS55 : 3000 mm (55°) - 3370 mm (65°)

Why are Gorter combinations safe?

- A safe handrail is provided along the entire route to the roof
- Scissor stair attic ladders have adjustable anti-skid steps
- Safety hook-on ladders have anti-skid rungs
- Safety hook-on ladders and stairs cannot slide away
- Safety hook-on ladders and stair can be locked to prevent unauthorized removal
- The entire route is free from sharp obstacles which may cause injuries or hinder access
- The roof hatch can be opened and closed using one hand
- The roof hatch automatically locks in the open position and can be released with one hand
- A diagonal hand rail is provided on the internal cover to safely access and exit the roof hatch
- Fall prevention: keep cover shut while on the roof to prevent fall hazard through open roof cavity.







Locked during use




Closed cover prevents against accidental falls

Safety reports are not applicable to combinations of a roof hatch with a ladder or retractable stairs supplied by third parties.





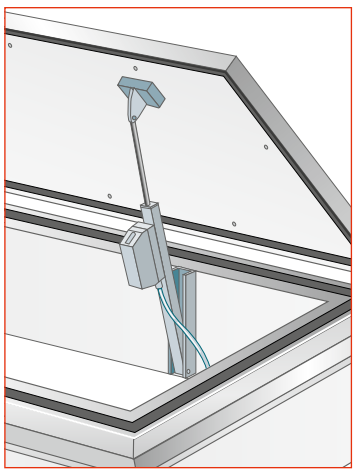


Electrical operation

Roof hatches can be supplied with either 24 V DC or 230 V AC electrical operation. Electrical operation (24 V DC) can be provided with a control box to enable connection with central alarm systems and indicators, such as rain or storm detectors.

For emergency exits, the control box can be fitted with batteries to ensure power supply in case of mains failure.

Hatches with two covers are supplied with at least two motors and an electronic closing sequence regulator in the control box.

Installation, connection and cabling must be carried out by a licenced electrician.

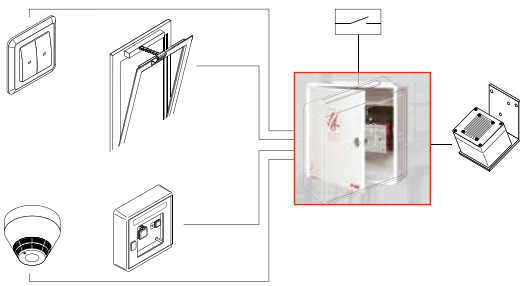


CE

Floor doors


Floor doors can be supplied with a hinged (WA and OP) or detachable cover (VL and PT). The cover is finished flush with the surface of the floor. A surface mounted model (OP) is also available.

Flush covers are manufactured from checkerplate. The recessed cover for infill with flooring material is manufactured from aluminium sheeting. Depending on the size, hatches are supplied with single or dual lids. Floor doors are supplied fully assembled with frame and cover. Depending on the model, the frame is provided with integrated anchors all around the perimeter, or welded adjustable anchors. Custom floor doors can be manufactured for retrofitting in concrete or framed floors.






» *Hinged floor door with one cover*



» *Floor door with recessed cover for infill with flooring material*



» *Floor door with glass cover*




» *Floor door - 120-min. fire rated*


Features of hinged floor doors, flush

WA

In and outdoor application



All aluminium models are suitable for indoor and outdoor use. The water draining frame is prepared for mounting a ø 40 mm u-PVC socket to connect to the drain system.

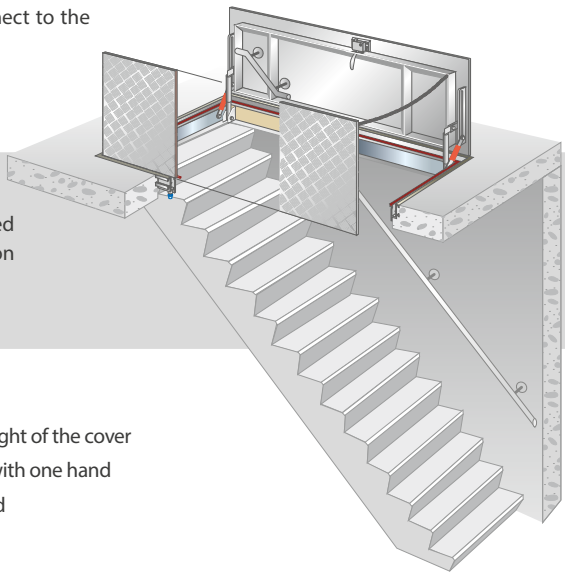



In combination with ladder or stairs


Depending on the opening size and specific building site situation, hinged floor doors can be combined with a fixed vertical ladder, safety hook-on ladder, or retractable/fixed stairs.


Safe and user-friendly

- Smooth and comfortable one-hand operation, regardless of the size and weight of the cover
- The counter-balance system offers assisted opening and controlled closing with one hand
- The cover automatically locks in an open position and releases with one hand
- A diagonal safety hand rail will be supplied for types with a length > 600 mm
- Anti-skid checkerplate lid with flush hand grip











Load of hinged, flush floor doors

The load meets the most severe conditions of EN1991-1-3: 2003 and AS1170-1. The calculations are based on safety class 3, Y f;q;u = 1,5 and Roark's Formulas for Stress and Strain, 7th Edition, Table 11.4 – Case 1a – Plate, all edges simply supported, uniform loaded.



» The cover reinforcing is considered as beams on two supports
» Application in situations with frequent dynamic loading is not recommended

Electrical operation




WA and WAPT can be supplied with 24 V DC or 230 V AC electrical operation. Electrical operation(24 V DC) can be extended with a control box to enable connection with central alarm systems.

For emergency exits, the control box can be fitted with batteries to ensure power supply in case of mains failure. The control box keeps the batteries charged and is programmable for a range of functions. Floor doors with two covers are supplied with at least two motors and the control box has a sequence regulator to close the covers in the correct order. Installation, connection and cabling must be carried out by a licenced electrician.

Standard design — WA

With anti skid checker plate - type WA

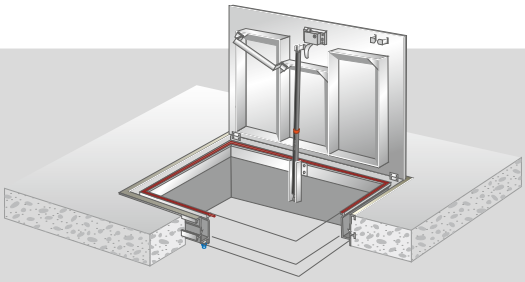

Custom sizes
Custom sizes are available.
Models > 1000 x 2500 mm will be supplied with 2 covers.


Standard sizes in mm [1]	
600 x **600**	1000 x**1500**
800 x **800**	1000 x**2000**
1000 x**1000**	

1) Hinge side is noted in bold.

Load
15 kN per m² according to EN 1991-1

Finish
» *Mill finish anodised aluminium*


Options:
» *Powder coated in RAL colour*



WA = water draining frame
E = with 1 cover
D = with 2 covers

» *Available as an emergency door*
» *Available with an insulated cover*

With recessed cover for infill with flooring material - type WAPT

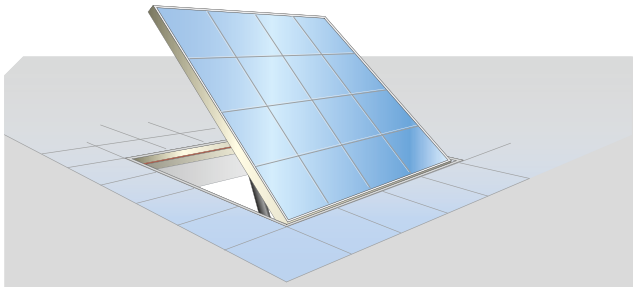

Custom sizes
Custom sizes are available.
Models > 1000 x 2500 mm will be supplied with 2 covers.


Standard sizes in mm [1]	
600 x **600**	1000 x**1500**
800 x **800**	1000 x**2000**
1000 x**1000**	

1) Hinge side is noted in bold.

Load
5 kN per m² according to EN 1991-1


Finish
» *Mill finish anodised aluminium*

Options:
» *Powder coated in RAL colour*



WA = water draining frame
E = with 1 cover
D = with 2 covers
PT = recessed cover for fill with ceramic tiles, carpet or timber

Glass floor door WAG

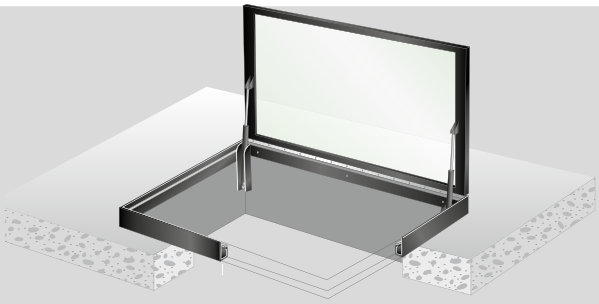

Standard sizes in mm [1]

1000 x **1000**	1000 x **2000**

1) Hinge side is noted in bold.

Material
- *Safety glass with fall protection*
- *Glass can be walked on*
- *Robust stainless steel hinges*
- *Flush glass plate*
- *WA = water draining frame*
- *2 powerful electric motors*


Glass floor doors are supplied in:

RAL 9005

Performance
- *Load up to 750 kg/m² according to din 18008-5 / EN1991 when closed*
- *Maximum point load of 500 kg per 50x50 mm*

Finish
- *Standard finish powder coating RAL 9005*

Floor door WAEI 120 min. fire rated

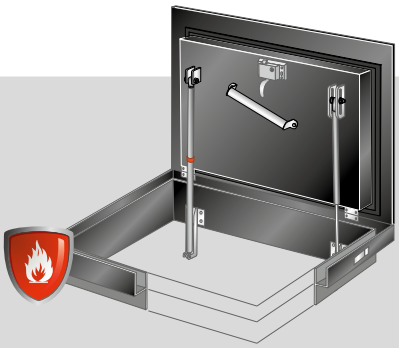

Custom sizes
Maximum dimensions: 1000 x 2000 mm

EW: 120 minutes
EI_1: 30 minutes
EI_2: 45 minutes

Standard sizes in mm [1]

600 x **600**	1000 x**1500**
800 x **800**	1000 x**2000**
1000x **1000**	

1) Hinge side is noted in bold.

Material
- *Fire rated floor doors are manufactured from steel*
- *WA = water draining frame*

Finish
- *Pre primed*
- *Standard finish powder coating RAL 9005*

EN 1634-1 | EN 13501-1 | AS 1530-4

Fire rated floor doors are supplied in:

RAL 9005


Options
- *Powder coated in a special RAL-colour*

Performance
- *According to EN1634-1, EN13501-2, AS1530-4 and BS 476-22:1987.*
- *KOMO:SKG.0372.0488*
- *Efectis-R000702*
- *TÜV SUD PSB CLS1B 170697595002*
- ***Close fire doors after use and keep closed!***



Hinged floor doors - surface mounted, in aluminium

OP

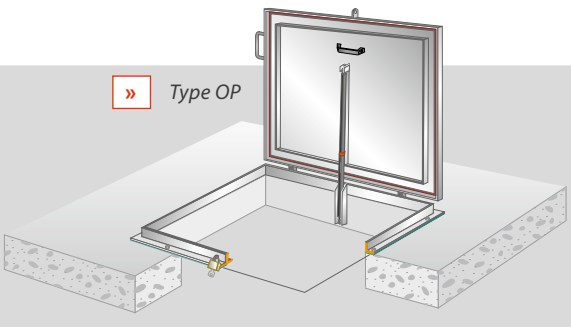

» *Type OP*

Standard sizes in mm [1]

800 x **800**	1000 x**1500**
1000 x**1000**	1000 x**2000**

1) Hinge side is noted in bold.


Types
Type OP: with checker plate cover
Type OP-S: OP + fall protection
- *Mill finish anodised aluminium*

Load
5 kN per m² according to EN 1991-1
Options:
Type OP-D: with 2 covers


Custom sizes
Custom sizes are available.
Installation
On floor or pit surface.

Floor doors with detachable cover, non-hinged

Gorter Floor Doors with detachable covers offer an economically convenient solution in situations where the door is not used frequently and the specified sizes are minor.

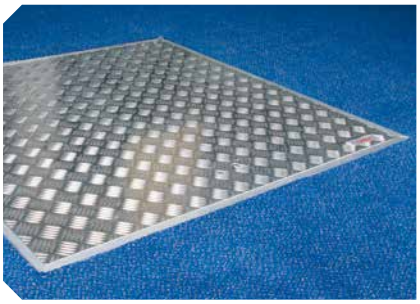




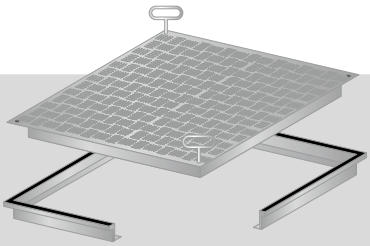


» *RVA*

Types


RVA	: flush, aluminium, with checker plate cover
RV	: flush, galvanised, checker plate cover
BV-FL	: galvanised steel, 27 mm recessed for infill
BV-FL-THERMO	: galvanised steel, 27 mm recessed for infill, insulated
BV	: galvanised steel, 50 mm recessed for infill
BV-THERMO	: galvanised steel, 50 mm recessed for infill, insulated
BVA	: aluminium, 65 mm recessed for infill




» *RVA*



» *RV*




» *BV-FL*




» *BV-FL-THERMO*






» *BV*



» *BV-THERMO*



» *BVA*



Standard dimensions	Type						
Passage in mm	RVA	RV	BV-FL	BV-FL-THERMO	BV	BV-THERMO	BVA
500 x 500	–	–	–	●	–	●	–
600 x 400	●	●	●	–	●	–	●
600 x 600	●	●	●	●	●	●	●
800 x 600	●	●	●	●	●	●	●
800 x 800	●	●	●	●	●	●	●
1000 x 600	●	–	●	●	●	●	●
1000 x 1000	●	●	–	–	–	–	–

● = available, – = not available Load RVA, RV, BV-FL::15 kN/m² Load BV, BVA: 125 kN/m²



Wall and ceiling doors


Wall and ceiling doors allow access to ducts, cable shafts and spaces that are otherwise not accessible for service and repair.

Material
Wall and ceiling doors are made of KTL (cathodic dip painting) treated steel and have a powder coating finish in RAL 9010.

Hardware
All doors are manufactured with a CAM lock.



Wall and ceiling door type Universal

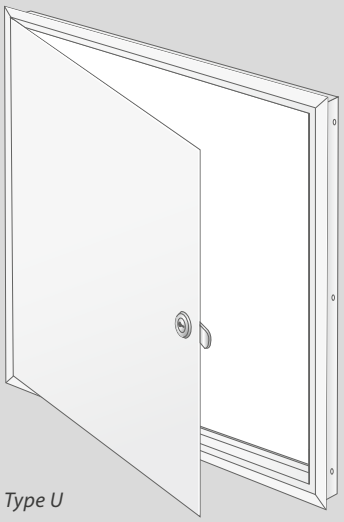


» *Type U*


Standard sizes in mm	
250 x 250	600 x 600
400 x 400	600 x 800
500 x 500	800 x 800

Material
» *KTL (cathodic dip painting) treated steel*


Finish
» *Powder coating :*
RAL 9010



» *In stud wall*



» *In brick wall*



» *In ceiling*

Wall door type B, fire rated 120 minutes

Efectis | EN 1634-1 | EN 13501-2



» *Type B*


Standard sizes in mm	
400 x 400	600 x 800
600 x 600	800 x 800

Material
» *KTL (cathodic dip painting) treated steel*

Finish
» *Powder coating :*
RAL 9010



» *In stud wall*




» *In brick wall*

E: 120 minutes
EI_1: 20 minutes
EI_2: 60 minutes
EW: 120 minutes

» *Fire rating according to EN1634-1 en EN13501-2*
» *Efectis-R01165*
» ***Close fire doors after use and keep closed!***

Type EXW - Explosion vents

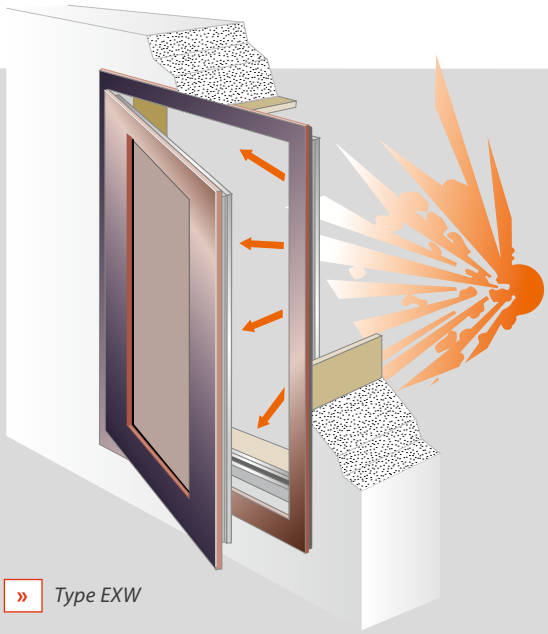

» *Type EXW*

Explosion vents are designed for installation in external vertical walls or facades. The door and door frame are made of an extruded aluminium profile with a thermal break. The door has an infill of a double-faced aluminium sheet with hard foam. The door opens to the outside.

Sizes
Explosion vents are made according to specification.

Explosion Release Control (ERC)
The explosion vent frame is provided with an Explosion Release Control (Patent No. 1870542). The door is provided with a cylinder lock with Euro cylinder operated from the inside. If the pressure on the inside door leaf exceeds approx. 100 kg-force the ERC will release. The ERC is tested and approved by AMOLF, the Institute for Atomic and Molecular Physics in Amsterdam.

Note: if the door is pulled from the outside with the same power as the release power, the ERC will open.

Finish
Powder coated to any colour specification, standard dry layer thickness 60 micron.

Calculation of the vent opening
The size of the vent opening must be calculated by a certified engineering company in accordance with local building codes.

» Actual standard: EN1991-1-7:2006



» *Explosion Release Control*



Ladders and scissor stair (attic ladders)

Gorter safety hook-on ladders and scissor stair (attic ladders) are safe and easy to use and are manufactured from top quality materials to guarantee optimal reliability and a long service life.


Safety hook-on ladders and scissor stair (attic ladders) are approved for safety, construction strength and operation by certified international safety approval institutions.




Hook-on ladders

Hook-on ladders are supplied to the specified room height in single (EL), double (OL2) or triple (OL3) designs.


- Hook-on ladders are made in accordance with EN131
- Standard anodized aluminium

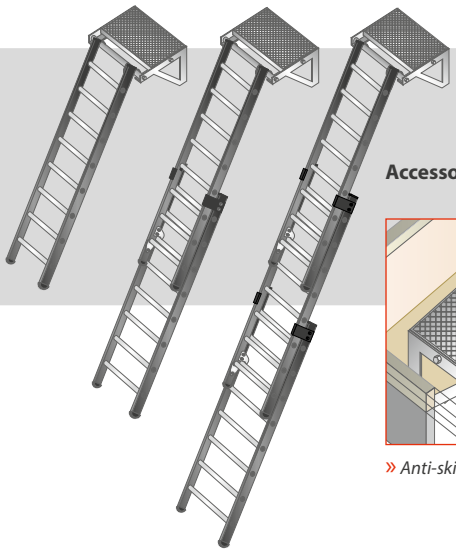


Accessories



» *Anti-skid, hook-on transfer step*



» *Suspension wall brackets*



» *Padlock provision*





Scissor stair (attic ladders)


EN 131-2

Retractable scissor stairs (attic ladders) consist of a casing with a wooden ceiling panel. A telescopic hand rail is included and easy to install. The scissor stair is attached to a hinged ceiling panel and is made of cast aluminium. A hook-on rod is included.


Gorter scissor stair (attic ladders) are manufactured from top quality materials and designed to provide a safe, durable and reliable access solution that is load tested upto 260 kg.

Safety


- Counterbalanced for practically effortless operation. An exertion of less than 3kg of force is required.
- Adjustable anti-skid steps
- Hand rail can be mounted on the left or right
- Prepared for securing with a padlock
- Safety approved: TÜV NORD certificate

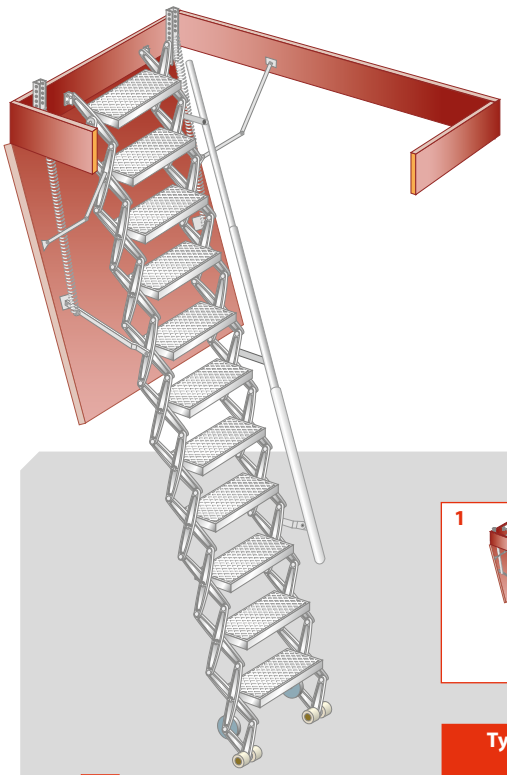

2 *Type Large*











	Type	Structural size (w x l x h) in mm	Step size (w x d) in mm	Aboma approval
1	Small	700 x 900 x 320	360 x 140	Safety report
2	Large	700 x 1200 x 250	360 x 140	Safety report
3	Large Electric [1]	700 x 1200 x 250	360 x 140	Safety report
4	Large EI-60 [2]	700 x 1200 x 250	360 x 140	Safety report
5	XL[3]	1000 x 1300 x 250	480 x 140	Safety certificate


1) 230 Vac, including control unit and wireless RF remote control.
2) Fire rating class EI 60, KOMO:SKG0372.0457
3) With two hand rails. RHT1015 Certified for Access to Lift Engine Rooms according to EN 14122-3 and EN 14975.



» *Adjustable anti-skid steps*




» *Hand rail on left or right side*




» *Padlock provision*

- *All scissor stairs are TÜV NORD certified*
- *Scissor stairs Large EI60: KOMO:SKG.0372.0457*
- *Fire rated according to EN 1634-1*

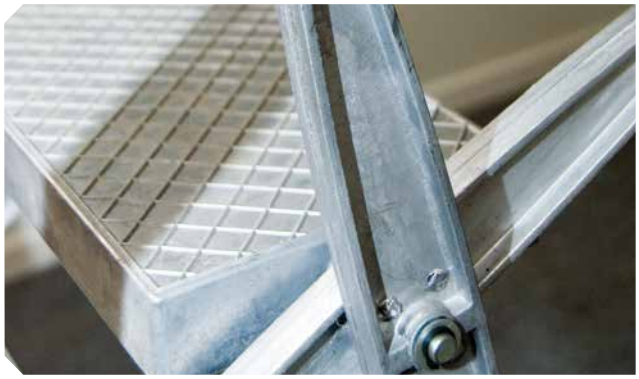





Dimensions

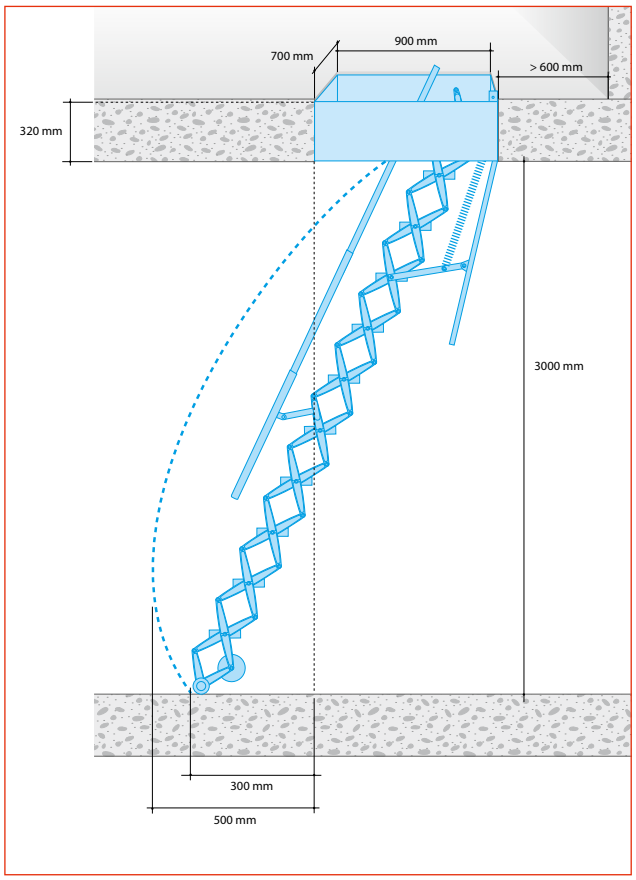


» *Type Small*

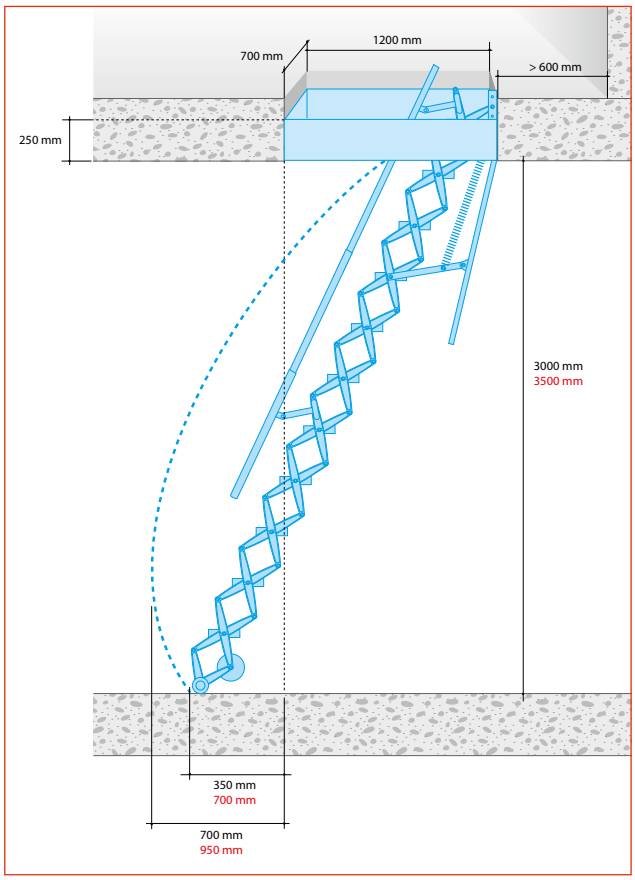

» *Type Large*

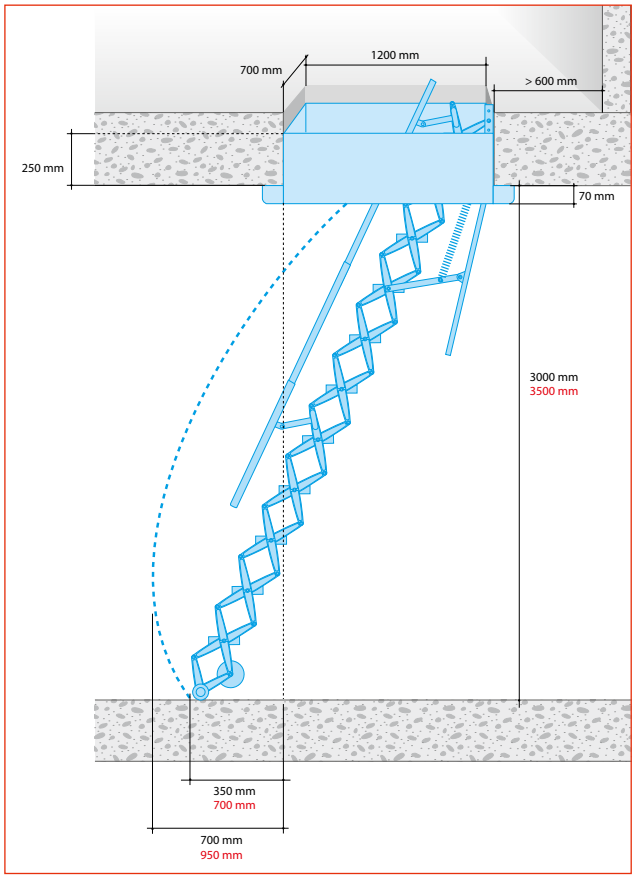

» *Type EI-60*

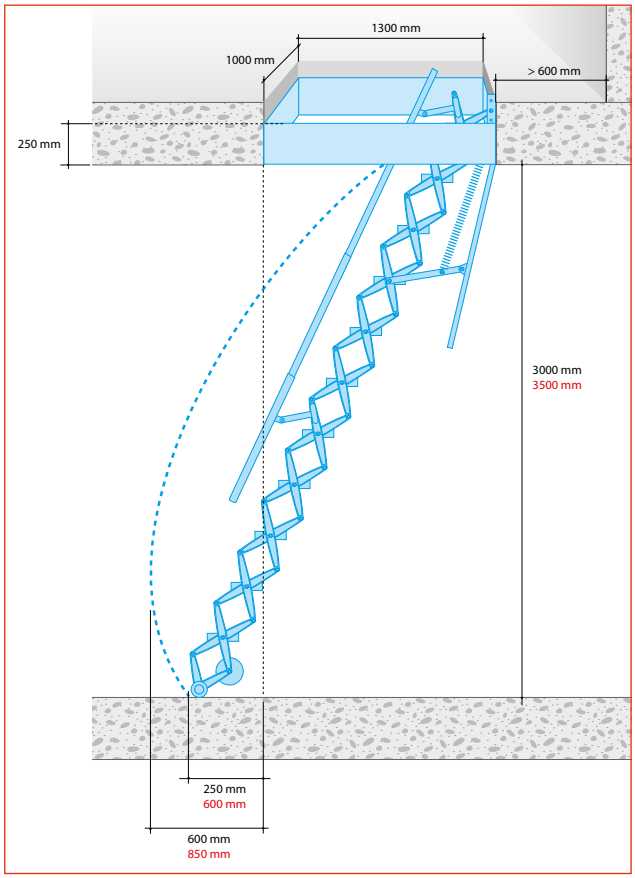

» *Type XL*

Extension of scissor stair (attic ladders) for use in suspended ceilings

In applications where the stair is fixed into a suspended ceiling, a plenum extension is necessary to bridge the distance between the suspended ceiling and the roof hatch. The stairs are extended upwards with two or more steps, without any change to the gradient. This provides a safe access solution without the need for vertical steps.


- Type Small, EI60 and Large Electric are not extendable
- An Aboma Safety report is available
- Dutch patent no. 2000298




» *Extension of scissor stairs (plenum 3)*

Dimensions


For type Large

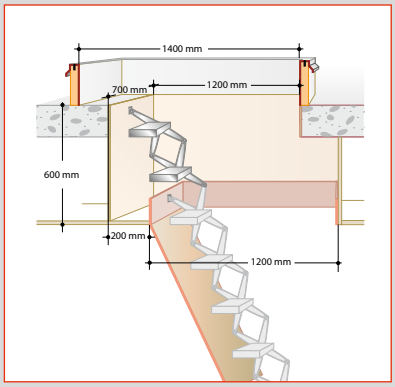

» *Plenum 2*

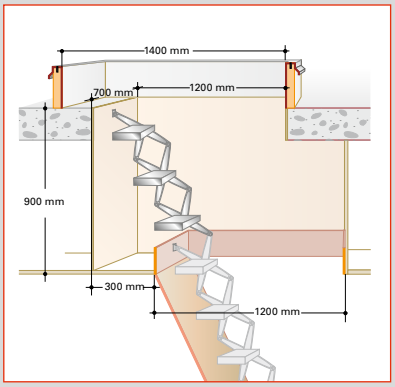


» *Plenum 3*

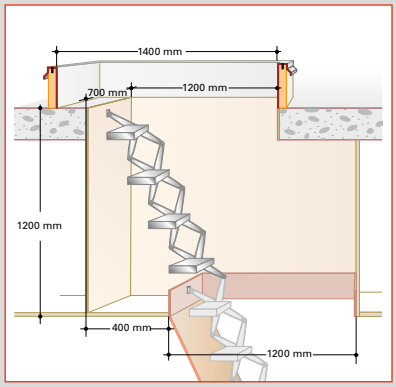


» *Plenum 4*


For type XL

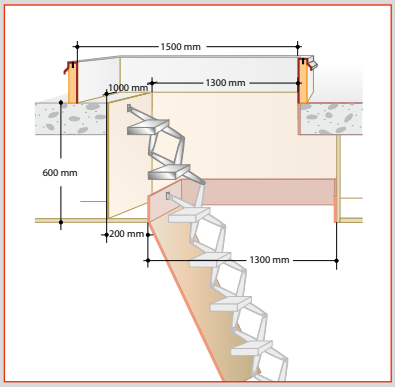

» *Plenum 2XL*

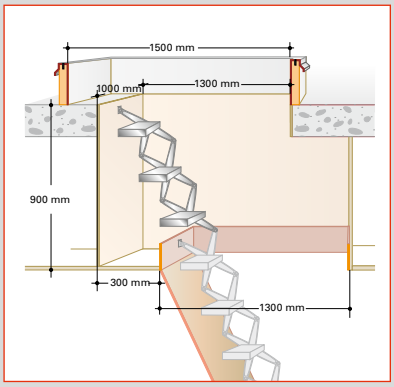

» *Plenum 3XL*

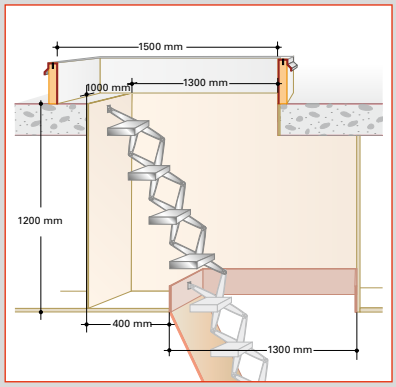


» *Plenum 4XL*



Fixed vertical ladders, with or without safety cage

EN-ISO 14122-4 | AS 1657-1992

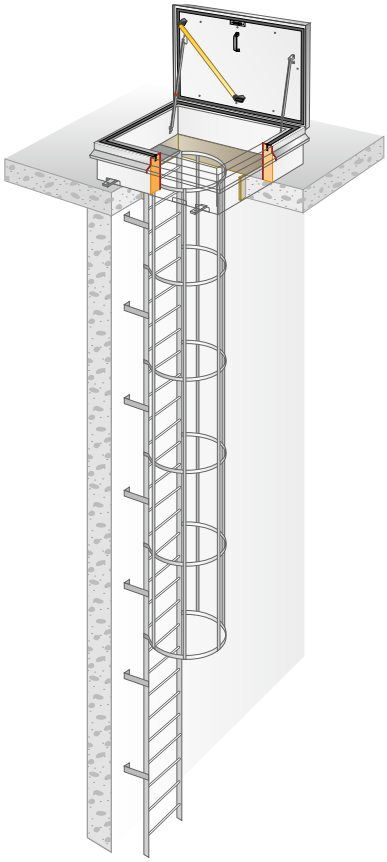


Fixed ladders are supplied with a pre-assembled cage with five strips (cage if applicable) and ladder supports for fixing to the external wall of the building.

Safety

- A safety cage (ø 700 mm) will be necessary from a height of 2200 mm or if the ladder is situated less than 3 metres from a difference in ground level
- If the difference in level is > ten metres an intermediate platform is needed
- If the difference in level is > ten metres the ladder sections between intermediate platforms must be less than six metres
- In applications where the cage ladder is fixed onto an external facade a step-over platform is necessary to safely access the roof
- At ground level the ladder must be lockable to prevent damage and unauthorised access
- The step-over, designed as a grading step, has a width of 180 mm
- In accordance with EN-ISO 14122-4 and AS1657-1992
- Fixed vertical ladders are suitable for combination with roof access hatches
- For Australian standards, the hatch has to be at least 900 x 950 mm

» *Vertical fixed ladder with safety cage*



» *Safety cage*

Warranty



» 10 years from delivery date covers roof hatches*)



» 5 years from delivery date covers floor, wall and ceiling doors*)



» 1 year from delivery date covers electrical operation, hook-on ladders, cage ladders, scissor stairs and fixed stairs*)



*) Full terms and conditions of warranty and delivery available on request.

Gorter Group™



The Netherlands
Gorter Luiken BV

Visit address:
Zuiderweg 12
NL-1741 NA SCHAGEN
THE NETHERLANDS

Postbus 265
NL-1740 AG SCHAGEN
THE NETHERLANDS
Tel: +31 224 21 98 60
Fax: +31 224 21 98 61
E-mail: info@gorterluiken.nl
Website: www.gorterluiken.nl

Belgium, France and Luxembourg
Gorter - Obelux

Meersbloem - Leupegem 21
B-9700 OUDENAARDE
BELGIUM
Tel: +32 5 523 2590
Fax: +32 5 531 9126
E-mail: info@gorterbelgie.be
Website: www.gorterbelgie.be

Germany
Gorter Deutschland GmbH

Ohligsmühle 7
42103 WUPPERTAL
GERMANY
Tel: +49 202 94 70 91 30
Fax: +49 202 94 70 91 31

ZEVEN
Tel: +49 4281 959 3045

E-mail: info@gorterdeutschland.de
Website: www.gorterdeutschland.de

Italy
Gorter Italia™

Via Nazionale 64
39040 Ora (BZ)
ITALY
Phone: +39 0471 810 089
Fax: +39 0471 810 875
E-mail: info@gorter.it
Website: www.gorter.it

Switzerland
Gorter Schweiz GmbH

E-mail: info@gorter.ch
Website: www.gorter.ch

Spain
Gorter España™

E-mail: info@gorter.es
Website: www.gorter.es

Denmark
Gorter Danmark™

E-mail: info@gorterdanmark.dk
Website: www.gorterdanmark.dk

Sweden
Gorter Sverige™

E-mail: info@gorter.se
Website: www.gorter.se

Hungary
Gorter Hungary Kft.

Helvécia, H-6034
Rákóczi Str. 84.
HUNGARY

E-mail: info@gorterhungary.hu
Website: www.gorterhungary.hu

Singapore
Gorter Hatches Singapore

E-mail: sales@gorterhatches.com
Website: www.gorterhatches.com

Argentina
Gorter Argentina™

E-mail: info@gorter.com.ar
Website: www.gorter.com.ar

Australia, Asia and Middle East
Gorter Hatches Pty Ltd

MELBOURNE
105 Wellington Street
St Kilda VIC, 3182
AUSTRALIA
Phone: +61 3 8648 6636

PERTH
Phone: +61 8 9463 6636

ADELAIDE
Phone: +61 8 8311 1136

BRISBANE
Phone: +61 7 3337 9936

SYDNEY
Phone: +61 2 8580 4436

E-mail: sales@gorterhatches.com.au
Website: www.gorterhatches.com.au

New Zealand
Gorter Hatches™

AUCKLAND
Phone: +64 9 280 4726
E-mail: sales@gorterhatches.co.nz
Website: www.gorterhatches.co.nz

Distributor:

Gorter®

©2022, Gorter Group™. Any illustrations and drawings only serve to provide an impression of the product; and do not constitute any legal obligation. All rights and technical modifications reserved.

Design: www.emogy.nl 20220404121A