Dilip Plastics Group

Tuflex ROOFINGS

UNBREAKABLE ELEGANCE

We take this opportunity to introduce ourselves as **Authorised Vendor & Stockists** of **M/s. Sabic Innovative Plastics India Ltd. (GE/Lexan Brand).**

"**Tuflex Roofings**" is one of the most well-known & trusted organization in the field of Polycarbonate & related products. Our core Business activities include Manufacturing & Supplying varied range of supreme quality Polycarbonate Corrugated Profiled Roofing sheets, domes, pyramids, skylight & other pre-fabricated structures.

Since generations we never believed in just supplying raw material, but, also in offering complete turn-key solutions to satisfy all the needs of our customers.

This spirit of innovation led us to set up a manufacturing unit dedicated only to thermoforming/profiling of **Polycarbonate Corrugated Profiled Roofing sheets** used in industrial roofing. We have the largest Thermoforming facility where we can profile a sheet as long as **6.0 meters** matching to almost each and every profile/corrugation generally available in the market.

Our Polycarbonate Corrugated Profiled Roofing sheets are sold under the brand name "**TUFLEX**".

However, being an authorized vendor, we can also profile "**LEXAN**" brand polycarbonate sheets manufactured by **M/s. SABIC Innovative Plastics India Ltd. (Formerly GE Plastics)** in case of client specific requirement.

We are the only manufacturers in India who can provide Profiled Polycarbonate Sheets with "**CUSTOMIZED WIDTH**" (other than standard 1220 mm). These sheets are mainly used for Strip lighting narrow roofs & projects with customized roofing. This facility ensures minimal wastage and thus, lower cost to our clients.

Polycarbonate Corrugated Profiled Roofing sheets manufactured by us have UV coating on BOTH SIDES which gives much better protection against weather & yellowing compared to other materials / brands available in the market with one side UV coating which is not advisable.

Typical Physical Properties of Polycarbonate Sheets

Property	Standard	Units	Value
Density	D-1505	g/cm3	1.2
Coef Linear Thermal Expansion	D-696	10-5 cm/cm°c	6.5
Thermal Conductivity	C-177	W/mK	0.21
Tensile Strength at Yield	D-638	MPa	62
Tensile Strength at Break	D-638	MPa	65
Tensile Modulus if Elasticity	D-638	MPa	2300
Flexural Strength	D-790	MPa	93
Flexural Modulus	D-790	MPa	1900
Notched Impact Strength	D-256	J/m	800
Heat Deflection Temp	D-648	°c	130

Particulars*	Tuflex Polycarbonate Sheets	Lexan** Polycarbonate Sheets
Type	Embossed and Compact/Solid	Embossed and Compact/Solid
Colour	Clear, bronze, opal, metallic, grey & green	Clear, bronze, opal & green
Availability	Always in stock	Varies as per type, colour & thickness
Thickness	3.0mm, 2.0mm, 1.8mm, 1.5mm	3.0mm, 2.0mm
Width	Standard 1220 & Any customized width 0.0mm - 1800 mm	Standard widths: 1220mm & 2050mm
Length	Upto 6.0 meters	Upto 6.0 meters
Dart Impact strength (in joules)	>200	>=200
Light transmission	>75%	>=72%
UV coating thickness	40 microns	40 microns
UV coating	Both side	Both side
Heat deflection (in °C)	>=135-140	>=135
Vicat softening temp (in °C)	>=145-150	>=145
Test Certificate	Available	Available
Stock and supply from	Delhi, Maharashtra, Gujarat, Bangalore	Only Maharashtra & Gujarat

* Above specification are general in nature and may change from time to time or as per client specification
** Lexan brand is owned by Sabic Innovative Plastics. We are authorized dealers.

List of some commonly used profiles and its specifications:-

1. Ispat
2. Tata Blue scope: Trimdeck
3. Metacolor - Essar
4. Bhushan
5. AC profile

Some of the other customized profile manufactured by us:-

1. Alpha
2. CenturyWell: Ganga
3. Color Roof India (Cril)
4. Finoram (Finolex_Industrial)
5. Ganesh (1050)
6. Hindalco
7. Interach Tracdeck Hi – Rib
8. JSW.Jindal
9. Kolormetal
10. Lloydeck
11. Lloyd_KlipLock
12. Loya
13. Metform
14. Multicolor
15. Pentatuff
16. Rajmohan (RMR)
17. Safintra_Comax
18. Safintra_Trimflut
19. Sintex
20. Tata BlueScope Kliplock(770)
21. TataBlueScope_Durashine Wall
22. Trimurti(TEPL)32_200
23. Uttam(Spectrum_1060)
24. Tiger Steel Roofing

ROOFINGS
UNBREAKABLE ELEGANCE

"We can manufacture any client specific customized profile & customized width"

Colour/Type	Light Transmission	Solar Transmission	SC Ratio
Clear Compact	88-90 %	80-86%	0.98
Clear Emossed	72-78%	75-83%	0.85
Opal	50%	46%	0.48
Broze	50%	54%	0.78
Grey	50%	54%	0.66
Metalic	35%	32%	0.48
Green	45%	49%	0.54

Advantages of Polycarbonate Corrugated Profiled Sheets:-

The Unbreakable Elegance
Impact Strength- Widely accepted as one of the toughest polymer sheets, Polycarbonate is 250 times stronger than glass and 25 times stronger than acrylic. Special thicknesses are even bullet resistant.

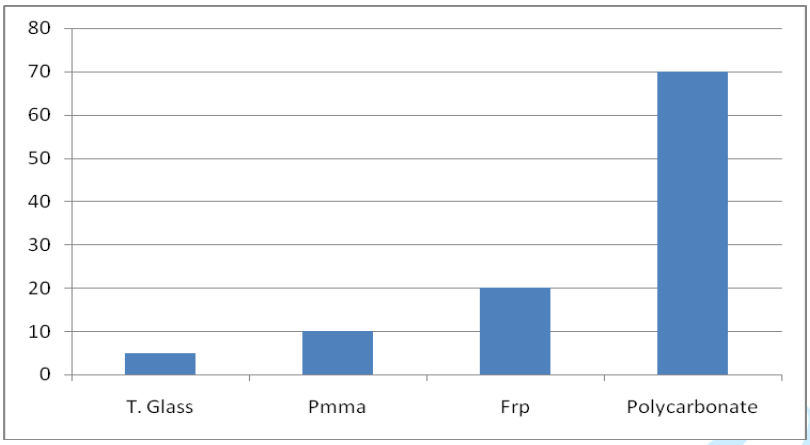


Fig. 1 Relative Impact Strength Comparison (of various material of same thickness)

See the Brighter Side
Transparency: clear polycarbonate sheets transmit upto 90% light which makes them as transparent as glass. We therefore, say that polycarbonate is transparent steel. Light transmission can be tailored to suit specific requirement.

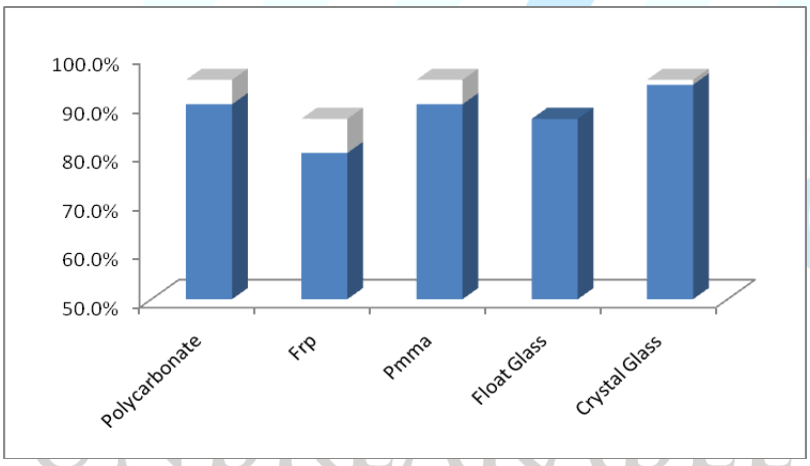


Fig. 1 Light Transmission Comparison (polycarobnate in at par with acrylic & glass, exceeding FRP in light transmission)

Come Sun, Rain or Storm
Weather Resistance: Polycarbonate exhibits superior performance in outdoor applications, being U.V. stabilized. Further these sheets are be U.V. coated to enhance their outdoor life.

India rubber
Design flexibility – Polycarbonate sheets can be cold bent, drilled, punched, sawed and thermoformed

Feather Touch
Light weight – owning to its specific gravity of 1.2, Lexan polycarbonate is half the weight of glass, of the same thickness, cutting down structural costs and making manual handling much easier.

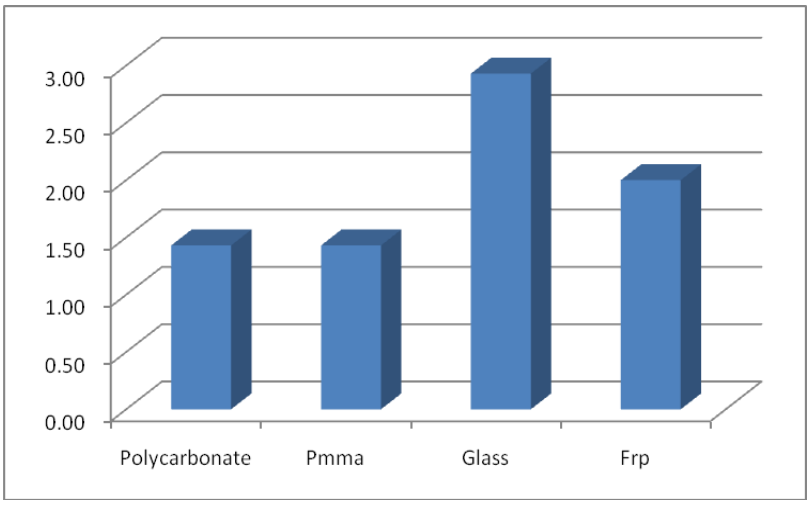


Fig. 2 Relative Weight Comparison (of various material of same thickness)

Blow Hot, Blow Cold
Temperature resistance – Polycarbonate sheets can withstand a maximum of 130°C and a minimum of 40°C, making them suitable for a wide range of applications, where the material is subjected to load at high temperature.

In the Heat of the Moment
Fire Resistance - Polycarbonate sheets are self extinguishing, making them extremely safe for use, even under hazardous conditions.

Keep Cool at all times
Thermal insulation – Polycarbonate sheets have much superior insulation properties, compared to other glazing material, resulting in drastic reduction of air conditioning cost.

Property	**Polycarbonate**	**FRP**
Impact Resistance	Excellent	Good
Weather Resistance	Excellent	Poor
Temperature Res.	Up to 120 Deg. C	Below 100 Deg. C
Light Transmission	Up to 89%	Up to 80% **
Fire Spread	Self Extinguishing	Flammable
Thickness	Uniform	Varying
Maintenance	Easy	Difficult*
TAC Approval (% of Total Roof Area)	5%	Only 2%

ROOFINGS
UNBREAKABLE ELEGANCE

TEST CERTFICATE

Test certificate* shall be provided in case of client requirement. This certificate provides details about the technical specifications of our product. Also the main advantage of a test certificate is it proves that material provided is as per client specific requirement. Thus, client has the assurance of not getting cheated by supplier in terms of thickness, length, width and other physical attributes.

*conditions applied for details contact manufacturer

The latest edition to our range of roofing material:-

Turbo Ventilators

Wind driven Turbo ventilators are the ventilators that are powered by the wind to create effective ventilation for different industries. Turbine or Turbo ventilators are round metal vents with fins in them. Even the slightest breeze can be enough for the turbo ventilator to rotate. Rotation causes a centrifugal force on the tip of the fins which suck out the stale hot air from inside of the building. The faster the wind, the faster the turbine will rotate and exhaust the heat, smoke, fumes, humidity, etc.

How does it work?

- It acts as a natural ventilation system whenever there is a thermal or wind pressure difference between the inside or outside of the building
- It also acts as a forced ventilation system especially in factories where the turbine rotates to create a negative pressure within the premise as a result of which cold air from outside comes into the premise.

Feature:

- Rigid roll formed curved vanes
- Low power consumption
- Weather & storm proof
- Rotor shaft 8(bearing assembly concealed in aluminium or stainless steel casing)
- Easily field replaced
- Virtually maintenance free
- Light weight & durable
- Available in aluminium & stainless steel

Advantages:

- 100% depreciation
- Safe as it does not require electricity
- No pollution as it uses natural air
- Easy to install on any type of roof
- No noise as using supreme bush
- Helps remove stale, damp & hot air Increases workers productivity

FRP Base Plate

We are amongst the prominent suppliers of FRP Base Plates. Our FRP Base Plates is manufactured from high grade material. The FRP Base Plates maintain strict adherence to high quality standards and they are thus well appreciated by our clients.

Advantages:

- Sturdy construction
- Durable
- Wear and tear resistant
- Resistant to corrosion
- Customized as per client profile

5 Year Warranty

We provide 5 year warranty* on turbo ventilators from the date of dispatch against any manufacturing defects. This warranty ensures quality of our product and services rendered to our clients.

*conditions applied for details contact manufacturer

Ultra ROOFINGS
UNBREAKABLE ELEGANCE

Tuflex Roofings has been verified by

What is TrustSEAL?

TrustSEAL is a business verification service that checks various records of existence, credibility and trustworthiness of suppliers & service providers. We gather documentary evidence from the supplier for the available records to ensure that the information provided is accurate & reliable.

Benefits of using TrustSEAL information…

- Fast & easy short-listing of suppliers & service providers
- Saving time, cost, effort required in supplier verification
- Reducing the risk of fraud

We can deliver all over India

Different Processing Units in India: Delhi, Maharashtra, Gujarat, Bangalore

For more details please log on to our website: www.tuflexroofings.com

Or

Please feel free to contact us on following address & contact numbers

Head Office:
168/170, Level "3", Abdul Rehman street, Mumbai, Maharashtra - 400 003, India

Mobile: + (91)-9820122385 / 9833120987
Telephone: + (91)-(22)-23410552/23410553, **Fax**: + (91)-(22)-23400370
Email: tuflexroofings@gmail.com,
Web: www.tuflexroofings.com,

UNBREAKABLE ELEGANCE