A.K. Singh
78630 19305


Avanish Singh
81600 88493

GSTIN : 24GNIPS9651E1ZJ


V S WIRE NETTING

Supply of all types of Wire Mesh & Perforated Sheet

Wire Mesh, Perforated Sheet, Mosquito Mesh, Crimped Mesh,
SS Screens, Spring Steel Screens Expended Metal, Welded Mesh,
Chain-link Fencing, Chicken Mesh, Barbed Wire Etc.

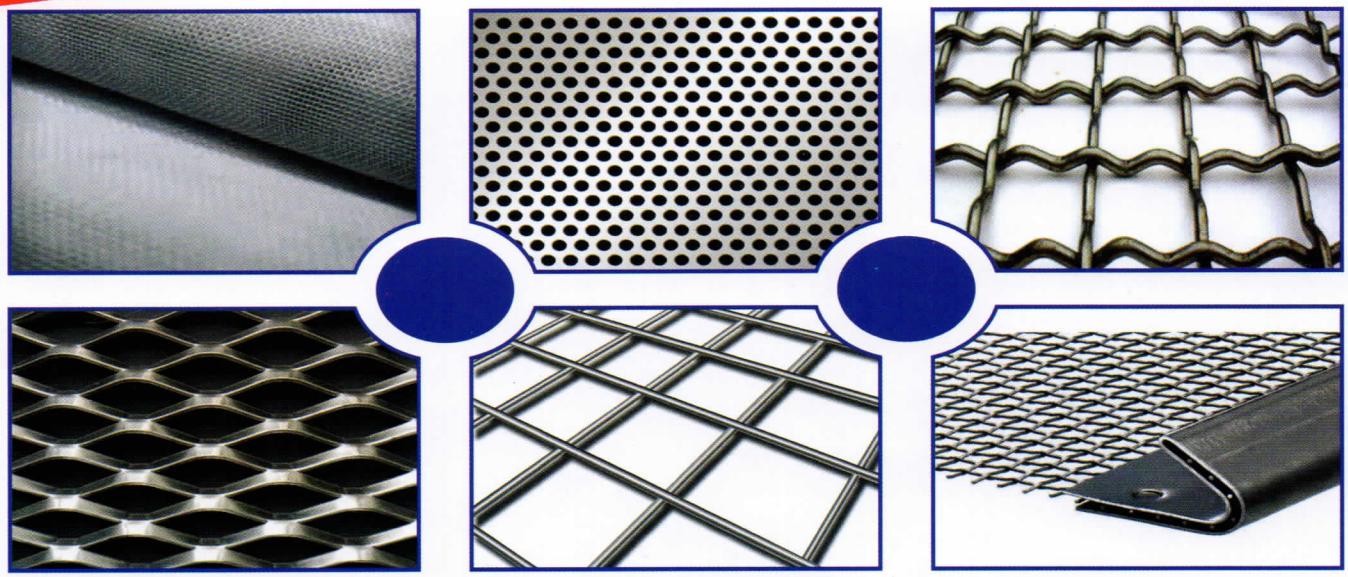

Supplied Up To
10 MM Thick Perforated Plates

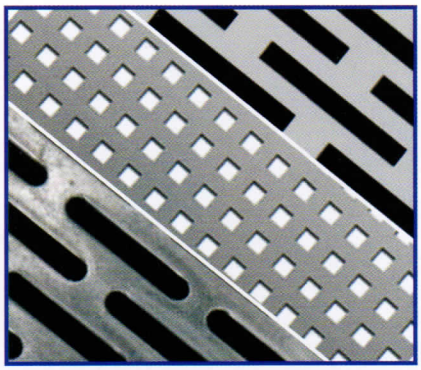


ENQUIRE WHEN REQUIRE
Any Dia, Any Slot, Any Metal, Any Size

Shop No. GF 06, Devashish Arcade, Near Managalam Arcade, Opp. Gurudwara, Odhav,
Ahmedabad - 382 415 Gujarat | **Email:** vswirenetting@gmail.com

V S WIRE NETTING

CRIMPED MESHES

Heaviest 12MM thick in Spring - Steel, Stainless Steel, High Carbon - High Tensile, G.I., / M.S., Etc




WELDED WIRE MESH / FABRICS

These are Supplied in M.S./ G.I., Stainless Steel in Different Widths & Required Size, Mesh & Gauge.
ALSO ANGULAR / DEGREE




VIBRATING WIRE WOVEN SCREENS

(WITH WITHOUT PANELS)
Plain ends or with side Panels Supplied to the Reqd. Sizes, Aperature, Dia in diff M.S., High Carbon, High Tensile etc, Coreect to Cut Sizes, Aslo Vibrating Machines




EXPANDED METALS

Are kept in M.S./ ALUMINIUM G.I. Stainless Steel Of Fine to biggesr holes & in Different thickness, widths, strands etc., Supplied in different size & width, Also Flattened Expanded Metals.




EXTRA - HEAVY

(Upto 10mm thick Rod)
Wire Meshes in S.S./G.I.,/ P.B.,/ Spring Steel/ M.S.,/ Aluminium, Brass, Copper Filter - Cloth etc. Supplied in cut to Size in Rectangular Mesh, Hollander Mesh, Dutch Weave Plain Weave, Twill Weave, Five Shaft Weave and other type of Weaves.




MIST ELIMINATOR, DEMISTER PADS

Thes are Supplied Mostly in S.S Wire eith S.S. Grid frames to the Reqd. Size, For the Seperation of Mist & Entrained liquid from Vapour Stream



CHAILINK WIRE FENCINGS

Supplied IN G.I./ PVC Coated & Stainless Steel from 6G to 18G of any height / width to the required length & size.



FINE MESHES

IN Stainless Steel, G.I., G.I.D., Stainless Steel, P.B., Brass, Copper, Nylon, Etc., As per ISS/BSS/ASTM/ Tyler upto the finest Microns & Meshes.



CHICKEN POULTRY HEX - NETTINGS

Supplied From 3/8" mesh 2" Mesh from 18g to 30g in Gid. G.I., Stainless Steel, P.V.C. Coated up to 6' Ft., (1.8 mts.,) widths.



GI BARBED WIRE

GI BARBED WIRE 12X12 Gauge
And GI BARBED WIRE 12X14 Gauge



Wire Mesh Specification

Mesh	SWG	DIAMETER OF WIRE		SIZE OF OPENING			Approx Percentage Open Area
		Inch	MM	Inch	MM	Micron	
4	12	0.104	2.640	0.146	3.710	3.710	34,14
4	13	0.092	2.340	0.158	4.010	4.010	39,98
4	14	0.080	2.030	0.178	4.320	4.320	46,28
4	15	0.072	1.830	0.178	4.520	4.520	50,67
4	16	0.064	1.630	0.186	4.720	4.720	55,25
4	17	0.056	1.430	0.194	4.920	4.920	60,03
4	18	0.048	1.220	0.202	5.130	5.130	65,27
5	14	0.080	2.030	0.120	3.050	3.050	36,05
5	15	0.072	1.830	0.128	3.250	3.250	40,93
5	16	0.064	1.630	0.136	3.450	3.450	46,12
5	17	0.056	1.430	0.144	3.650	3.650	51,62
5	18	0.048	1.220	0.152	3.860	3.860	57,74
5	19	0.040	1.020	0.160	4.060	4.060	63,87
5	20	0.036	0.910	0.164	4.170	4.170	67,38
6	16	0.064	1.630	0.102	2.603	2.603	37,82
6	17	0.056	1.430	0.110	2.803	2.803	43,85
6	19	0.040	1.020	0.127	3.213	3.213	57,62
6	20	0.036	0.910	0.131	3.323	3.323	61,63
6	21	0.032	0.810	0.135	3.423	3.423	65,39
8	16	0.064	1.630	0.061	1.545	1.545	23,68
8	17	0.056	1.430	0.069	1.745	1.745	30,21
8	18	0.048	1.220	0.077	1.955	1.955	37,91
8	19	0.040	1.020	0.085	2.155	2.155	46,07
8	20	0.036	0.910	0.089	2.265	2.265	50,89
8	21	0.032	0.810	0.093	2.365	2.365	55,48
8	22	0.028	0.710	0.097	2.465	2.465	60,28
8	23	0.024	0.610	0.101	2.565	2.565	65,27
8	24	0.022	0.550	0.103	2.625	2.625	68,36
8	25	0.020	.0.500	0.105	2.675	2.675	70,98
10	20	0.036	0.910	0.064	1.630	1.630	41,18
10	21	0.032	0.810	0.068	1.730	1.730	46,39
10	22	0.028	0.710	0.072	1.830	1.830	51,91
10	23	0.024	0.610	0.076	1.930	1.930	57,74
10	24	0.022	0.550	0.078	1.990	1.990	61,38
10	25	0.020	0.500	0.080	2.040	2.010	64,50
12	22	0.028	0.710	0.055	1.407	1.407	44,16
12	23	0.024	0.610	0.059	1.507	1.507	50,67
12	24	0.022	0.550	0.062	1.567	1.567	54,78
12	25	0.020	0.500	0.064	1.617	1.617	58,34
12	26	0.018	0.450	0.066	1.667	1.667	62,00
14	24	0.022	0.550	0.050	1.264	1.264	48,56
14	25	0.020	0.500	0.052	1.314	1.314	52,48
14	26	0.018	0.450	0.054	1.364	1.364	56,55
14	27	0.016	0.400	0.056	1.414	1.414	60,77
14	28	0.015	0.370	0.057	1.444	1.444	63,37
16	24	0.002	0.550	0.041	1.038	1.038	42,71
16	25	0.020	0.500	0.043	1.088	1.088	46,93
16	26	0.018	0.450	0.045	1.138	1.138	51,34
16	27	0.016	0.400	0.047	1.188	1.188	55,96
16	29	0.013	0.340	0.049	1.248	1.248	61,75
16	30	0.012	0.310	0.050	1.278	1.278	64,76

Mesh	SWG	DIAMETER OF WIRE		SIZE OF OPENING			Approx Percentage Open Area
		Inch	MM	Inch	MM	Micron	
18	25	0.020	0.500	0.036	0.036	9,11	41.69
18	26	0.018	0.450	0.038	0.038	961	46.39
18	27	0.016	0.400	0.040	0.040	1,011	51.34
18	28	0.015	0.370	0.041	0.041	1,041	54.43
20	24	0.022	0.550	0.028	0.720	720	32.14
20	25	0.020	0.500	0.030	0.770	770	36.76
20	26	0.018	0.450	0.032	0.820	820	41.69
20	27	0.016	0.400	0.034	0.870	870	46.93
20	28	0.015	0.370	0.035	0.900	900	50.22
20	29	0.013	0.340	0.037	0.930	930	53.62
20	30	0.012	0.310	0.038	0.960	960	57.14
24	27	0.016	0.400	0.026	0.658	658	38.69
24	28	0.015	0.370	0.027	0.688	688	42.30
24	29	0.013	0.340	0.028	0.718	718	46.07
24	30	0.12	0.310	0.029	0.748	748	50.00
24	32	0.011	0.270	0.031	0.788	788	55.48
30	28	0.015	0.370	0.019	0.477	477	31.70
30	29	0.013	0.340	0.020	0.507	507	35.81
30	30	0.012	0.310	0.021	0.537	537	40.18
30	31	0.011	0.290	0.022	0.557	557	43.23
30	32	0.011	0.270	0.023	0.577	577	46.39
40	32	0.011	0.270	0.014	0.365	395	33.04
40	33	0.010	0.25	0.015	0.385	385	36.76
40	34	0.009	0.234	0.016	0.401	401	39.88
40	35	0.008	0.210	0.017	0.425	425	44.80
40	36	0.008	0.193	0.017	0.442	442	48.45
50	34	0.009	0.234	0.011	0.274	274	29.09
50	35	0.008	0.210	0.012	0.298	298	34.41
50	36	0.008	0.193	0.012	0.315	315	38.45
50	37	0.007	0.172	0.013	0.336	336	43.75
50	38	0.006	0.152	0.014	0.356	356	79.11
60	36	0.008	0.193	0.009	0.230	230	29.60
60	37	0.007	0.172	0.010	0.251	251	35.25
60	38	0.006	0.152	0.011	0.271	271	41.08
80	38	0.006	0.152	0.007	0.166	166	27.17
80	39	0.005	0.130	0.007	0.188	188	34.88
80	40	0.005	0.122	0.008	0.196	196	37.91
80	41	0.004	0.112	0.008	0.206	206	41.89
80	12	0.004	0.102	0.008	0.216	216	46.07
100	42	0.004	0.102	0.006	0.152	152	35.81
100	43	0.004	0.091	0.006	0.163	163	41.18
100	44	0.003	0.081	0.007	0.173	173	46.39
120	44	0.003	0.081	0.005	0.131	131	38.11
150	45	0.003	0.071	0.004	0.098	98	73.72
150	45.5	0.002	0.063	0.004	0.106	106	39.43
200	47	0.002	0.050	0.003	0.077	77	36.76
250	48	0.002	0.040	0.002	0.062	62	36.76
300	48	0.002	0.040	0.002	0.045	45	27.83
325	48.8	0.001	0.035	0.002	0.043	43	30.49
400	49.5	0.001	0.028	0.001	0.036	36	31.25
500	50	0.001	0.025	0.001	0.026	26	25.79

Perforated Sheet Specification

HOLE IN NO.	HOLE IN MM	PITCH In MM	NUMBER OF HOLE Per Sq.Inch	OPEN AREA IN %
3.00	0.50	1.09	627.02	19.09
3.25	0.55	1.25	476.00	17.50
3.50	0.60	1.25	471.00	20.90
3.75	0.60	1.35	408.00	24.39
4.00	0.80	1.39	385.57	30.05
4.50	0.90	1.39	385.57	38.04
5.00	1.00	1.67	267.12	32.53
5.25	1.10	1.67	267.12	39.36
5.50	1.20	2.00	186.24	32.66
5.75	1.30	2.25	147.15	30.29
6.00	1.40	2.50	119.19	28.45
6.25	1.50	3.00	82.77	22.68
6.50	1.60	3.17	74.13	23.11
6.75	1.70	3.25	70.53	24.82
7.00	1.80	3.50	60.81	24.00
7.25	1.90	3.50	60.81	26.74
7.50	2.00	3.75	52.98	25.81
7.75	2.10	3.75	52.98	28.45
8.00	2.20	4.33	39.78	23.42
8.25	2.30	3.50	60.81	39.18
8.50	2.40	3.50	60.81	42.66
8.75	2.50	5.00	29.80	22.68
9.00	3.00	5.00	29.80	32.66
10.00	3.20	6.50	17.63	21.99
10.25	3.50	6.50	17.63	26.31
10.75	4.00	6.50	17.63	34.36
11.25	4.50	6.50	17.63	43.48
11.75	5.00	8.00	11.64	35.44
12.50	6.00	8.00	11.64	51.03
12.50	6.00	9.00	9.20	40.32
13.75	7.00	11.25	5.89	35.13
15.00	8.00	11.25	5.86	54.88
15.75	10.00	15.00	3.31	40.32
	12.00	18.00	2.30	40.32
		OTHERS		
	2.00	4.91	30.90	15.05
	2.50	5.20	27.55	20.97
	3.00	4.75	33.02	36.19
	4.00	6.00	20.69	40.32
	5.00	7.80	12.24	37.28
	6.00	7.80	12.24	53.68
	8.00	10.50	6.76	52.67