RapidRoll® 3000 Series

The high performance doors for external and internal applications for the manufacturing industry

ALBANY
ASSA ABLOY

Technical data sheet

ASSA ABLOY, the global leader in door opening solutions



NIHVA

The RapidRoll® 3000 Series

Albany RapidRoll® 3000 series combine the greatest functionality with modern design. Their outstanding engineering makes the doors extremely fast, safe, robust and guarantees an extremely long service life with low maintenance needs. The stylish modern design, achieved by using polished aluminium slats and large windows, ensures an attractive appearance and perfect integration into building facades.

VARIETY OF MODELS

The RapidRoll® 3000 is available in various versions in addition to the standard version illustrated: The RapidRoll® 3000 R for tight spaces, the RapidRoll® 3000 XXL for large openings, the RapidRoll® 3000 ISO for enhanced insulation or the RapidRoll® 3000 GL for very high transparency. There is a wide range of accessories to customise the doors.

DOOR MATERIAL

The side frames are manufactured from galvanised steel and can optionally be powder-coated in a wide variety of RAL colours.

DOOR CURTAIN

The following designs are available:

- Doulbe-walled aluminium slats, anodized without windows, optional with window slats made of impact resistant Polycarbonate (PC)
- Clear Polycarbonate (PC) window slats, transparency > 70%
- Anodised aluminium slats (exterior) with additional (interior) insulating chamber
- Perforated slats

The aluminium slats can be coated in a wide variety of RAL colours, custom colours are also possible.

ACTUATORS

Modifications to individual required functions can be implemented with additional safety devices such as infrared or radar motion detectors and a wide variety of industrial actuators (switches, induction loops, radio transmitters etc.). We are happy to advise you and put together a tailor-made configuration for you.

BOTTOM PROFILE

A profile with a lengthened flexible seal, which may optionally be extended, is used to seal the door against the ground.

MATCHING PEDESTRIAN DOOR

If desired, a pedestrian door of identical appearance can be supplied as a option.



RAPID SERVICING AND MAINTENANCE

The entire door structure has been developed with minimum service and maintenance effort in mind. For example, thanks to their individual suspension from the rubber belt, each slat can be replaced individually, rapidly and easily.



INSULATION

The RapidRoll® 3000 ISO meets high demands on thermal insulation. The modified curtain has additional insulation (chamber system) with complete thermal separation. The door is further characterised by particularly quiet operation.





CONTACTLESS WINDING

The innovative Disc Drive technology used in the RapidRoll® 3000 supports the door curtain movement thereby ensuring a long service life. The aluminium slats are wound onto winding discs without contact. Using this technology, the door can be opened and closed very quickly and with no wear.

MOTOR AND TOP ROLL COVER

Motor and top roll covers of anodised aluminium are available as an option. Inspection covers to the side can be opened for servicing work.

MOTOR POSITION

The gear motor can be positioned on the right or on the left side of the door. The drive is integrated into the side frame in the RapidRoll® 3000 R.

CONTROL SYSTEM

The RapidRoll® 3000 is equipped as standard with the MCC^{VectorControl} frequency converter control, which permits high opening and closing speeds, and also a gentle, quiet, and hence low-wear, motion sequence.

The compact control unit is integrated in the door's design and mounted under the drive. The hardware and software can be customised to meet customer-specific requirements and expanded by additional functions as needed.

CONTROL UNIT

The user-friendly graphical control unit with a display gives the user information about the current status of the door and all of the important technical parameters by means of plain text at any time. In addition, the system stores all operating and service data and shows, for example, when a new service date is pending.

MANUAL ACTIVATION

In the event of a power failure the door can be opened manually with the use of a brake release handle. The door is partially opened automatically by a spring system in the side frames.

SAFETY FEATURES

The RapidRoll® 3000 is equipped as standard with a contactless, pre-running photocell on the leading closing edge and a stationary photocell which prevent the door from closing as long as persons or objects are in the closing plane.

WIND LOADS

Depending on the model and door size, the RapidRoll® 3000 meets the requirements of classes 3 or 4 as specified in EN 12424.





The basic model RapidRoll® 3000

- The exterior door for busy doorways
- High opening speed (max. 2.3 m/s)
- High wind class 3 / 4 in accordance with EN 12424
- Dimensions up to 5 x 5 m
- Double-walled aluminium slat curtain, optionally with windows or perforated slats for ventilation
- Good noise insulation
- Optionally also available as a laser protection door





GLASS LOOK

The transparent one RapidRoll® 3000 GL

Basic model
+ Maximum transparency and translucency > 70%
+ Large, crystal-clear Polycarbonate PC panes, set in anodized aluminium profiles
+ Ideal for use in showrooms

NIHVA







The space-saver
RapidRoll® 3000 R

Basic model
+ Minimum lintel space
+ Motor built into the side frame
+ Slender side frames for doors ≤ 3.8 m wide
+ Curtain variants with perforated slats
+ Ideal for use in underground garages





The big one
RapidRoll® 3000 XXL

Basic model
+ Can be supplied in sizes up to 8 m wide and 6 m high
+ Ideal for use in industrial buildings with busy traffic





The energy-efficient one
RapidRoll® 3000 ISO

Basic model
+ Optimum insulation thanks to insulating slats (chamber system)
+ Complete thermal isolation of the door curtain
+ Maximum energy savings
+ Double-glazed window
+ U-value door complete (5 x 5 m) = 1,98 W/m²K

RapidRoll® 3000 High performance door

TECHNICAL DATA	RapidRoll® 3000	RapidRoll® 3000 GL	RapidRoll® 3000 R
Application	As an exterior or interior door also suitable as a laser protection door	Suitable as an exterior or interior door	As an exterior or interior door an machinery protection door
Wind resistance	Class 3 – 4 - EN 12424	Class 3 – 4 - EN 12424	Class 3 – 4 - EN 12424
Door dimension (mm) (DW min./max.) (DH min./max.) Door area Side frame excluding motor	600 / 5000 mm 2500 / 5000 mm 25 m² 325 mm	600 / 5000 mm 2500 / 5000 mm 25 m² 325 mm	600 / 6000 mm 1500 / 3000 mm 18 m² 220 mm (360 mm for width > 3
Opening direction			vertical
Covers Top roll cover/motor cover			• Aluminium [1]
Surface material			
Side frames			✓ Galvanised steel • RAL powder-coate
Door curtain			
Anodised aluminium slats	✓	–	✓
Isolation	•	–	•
Coloured profiles (RAL)	•	–	•
Profiles with windows	•	–	•
Anodised aluminium with crystal clear Polycarbonate panes	–	✓	–
Lengthened flexible seal	•	•	•
Drive unit/control system			
Drive unit			electric
MCC Vector Control	✓	✓	✓
Chain drive to reduce the mounting space to the side	•	•	–
Motor power			1,1 kW
Opening/closing speed up to max.	2,2 / 0,7 m/s	1,8 / 0,7 m/s	2,0 / 0,6 m/s
Fuse protection			10 A
Control voltage			24 V DC
Protection degree			IP 55
Mains connection			3L/(N)/PE 380/400/415/440/480V, 50/60 Hz / Vortr
Additional opening height	✓	✓	✓
Potential-free contacts	•	•	•
Safety			
Electrical safety contact edge	•	–	•
Door line photocell	✓	✓	✓
Pre-running photocell	✓	✓	✓
Curtain tension	✓	✓	✓
Counterbalance	✓	✓	✓
Self-opening, partial	✓	✓	✓
Mannual operation with Bowden cable	✓	✓	✓
Break release lever outside	•	•	•
Traffic light function			
Without direction detection			✓ 24 V DC
With direction detection			✓ 24 V DC
Flashing alarm light			✓ 24 V DC
Error message			✓ Text

NIHVA

ALBANY
ASSA ABLOY

	RapidRoll® 3000 XXL	RapidRoll® 3000 ISO
d as a laser or	As an exterior or interior door	As an exterior or interior door
	Class 3 – 4 - EN 12424	Class 3 – 4 - EN 12424
	1000 / 8000 mm 2500 / 6000 mm 36 m² 350 mm	1000 / 6000 mm 2500 / 5000 mm 30 m² 350 mm
300)		
d		
	✓	✓
	•	✓
	•	•
	•	•
	–	–
	•	•
	✓	✓
	–	✓
	1,8 / 0,6 m/s	2,0 / 0,6 m/s
fo erforderlich für 220/230/500V		
	✓	✓
	•	•
	•	•
	✓	✓
	✓	✓
	–	–
	✓	✓
	✓	✓
	✓	✓
	•	•



SAFETY

The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1.

NOTES

The door safety devices are designed for the normal use of power-operated doors in accordance with the harmonized CE Guidelines. In addition to this, difficult environmental conditions may affect the proper use. For more information or to schedule an on-site inspection, please contact an ASSA ABLOY Entrance Systems sales engineer for Albany Procucts.

- • Option
- ✓ Standard
- – not possible

1) For doors with a height < 2500 mm the use of top roll and motor cover is required according to standard EN 13241-1.



Underground garage



Facade design



Logistics



Logistics




Paint design




Car dealer test facility

General drawing / Fixing plan

RapidRoll® 3000 / 3000 GL

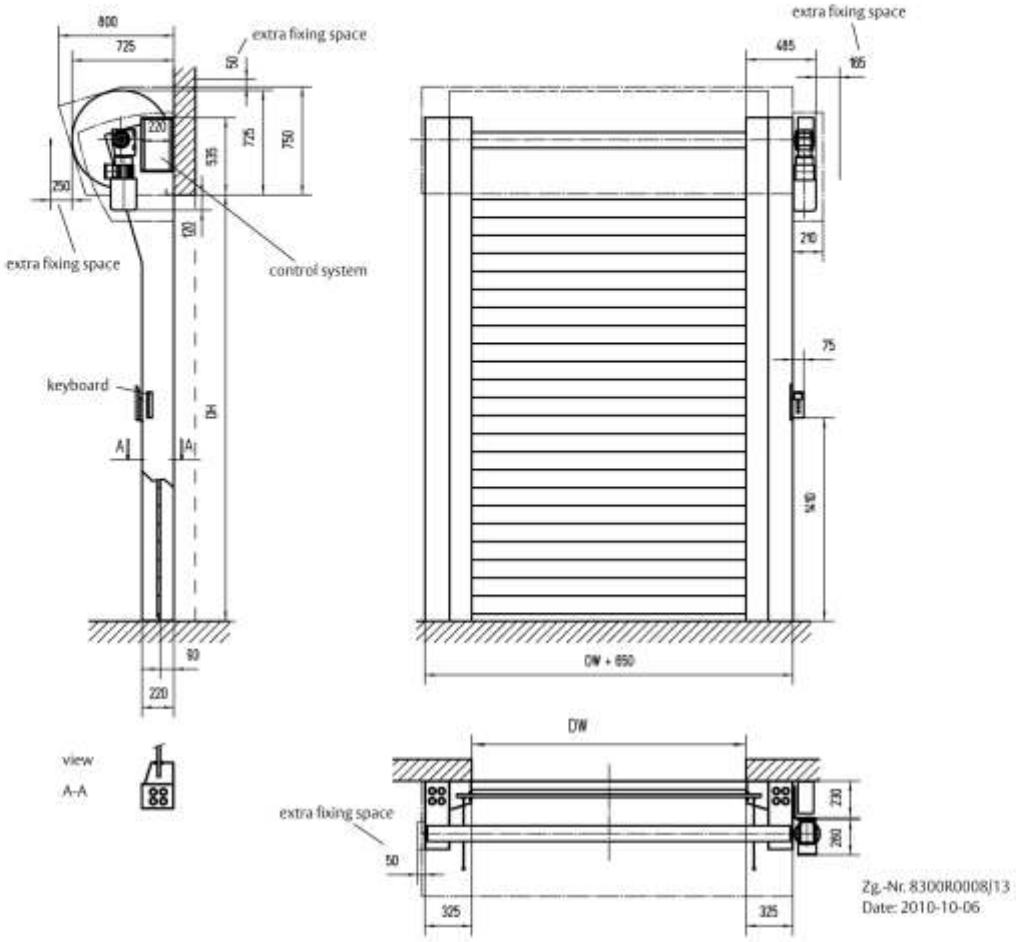

Zg.-Nr. 8300R0008J13
Date: 2010-10-06

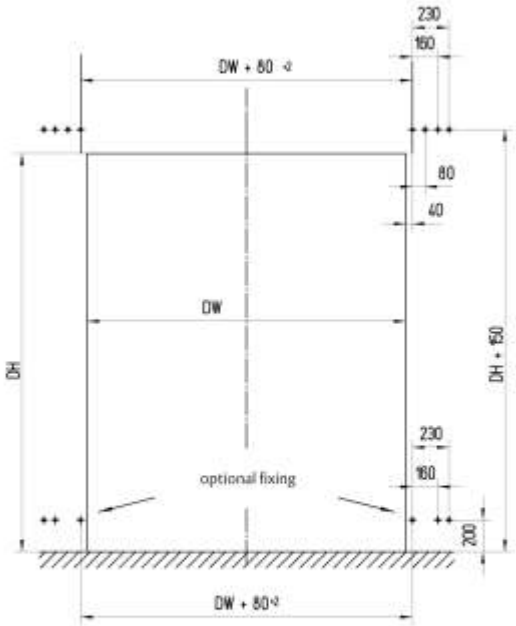




Zg.-Nr. 8300R0007J4
Date: 2010-11-22

General drawing / Fixing plan


RapidRoll® 3000 XXL / 3000 ISO

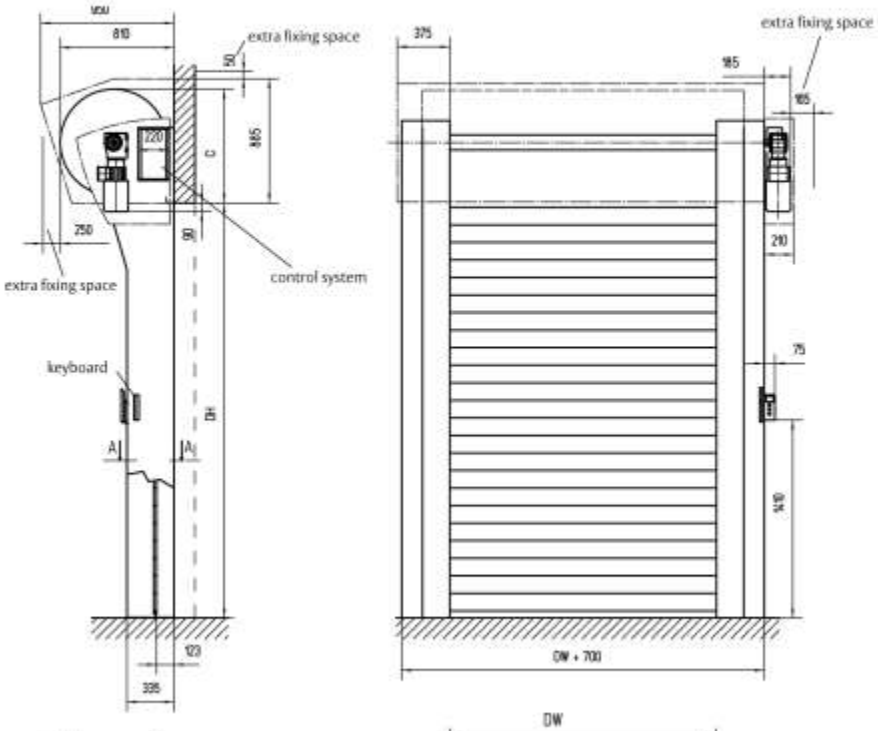

	A	C
RR3000 XXL (DH>5000) RR3000 ISO	300	850
RR3000 XXL (DH≤5000)	270	740

top roll cover	B
with	100
without	50

Zg.-Nr. 9300R0008 Revo
Date: 2012-07-17

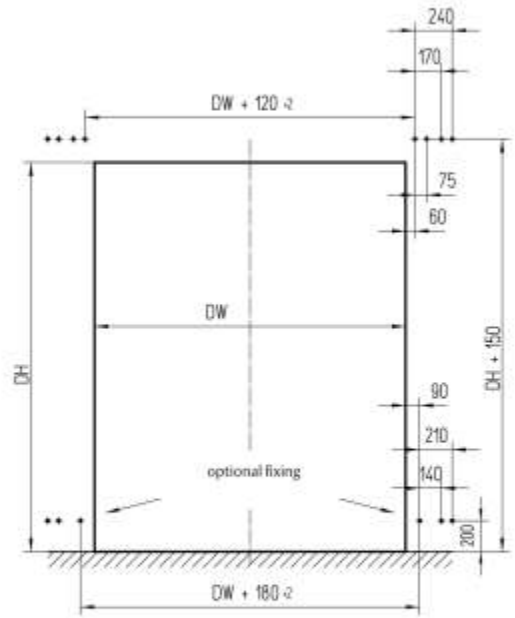


fixing screws M12 or comparables



Zg.-Nr. 8300R0030
Date: 2008-10-15


General drawing / Fixing plan

RapidRoll® 3000 R

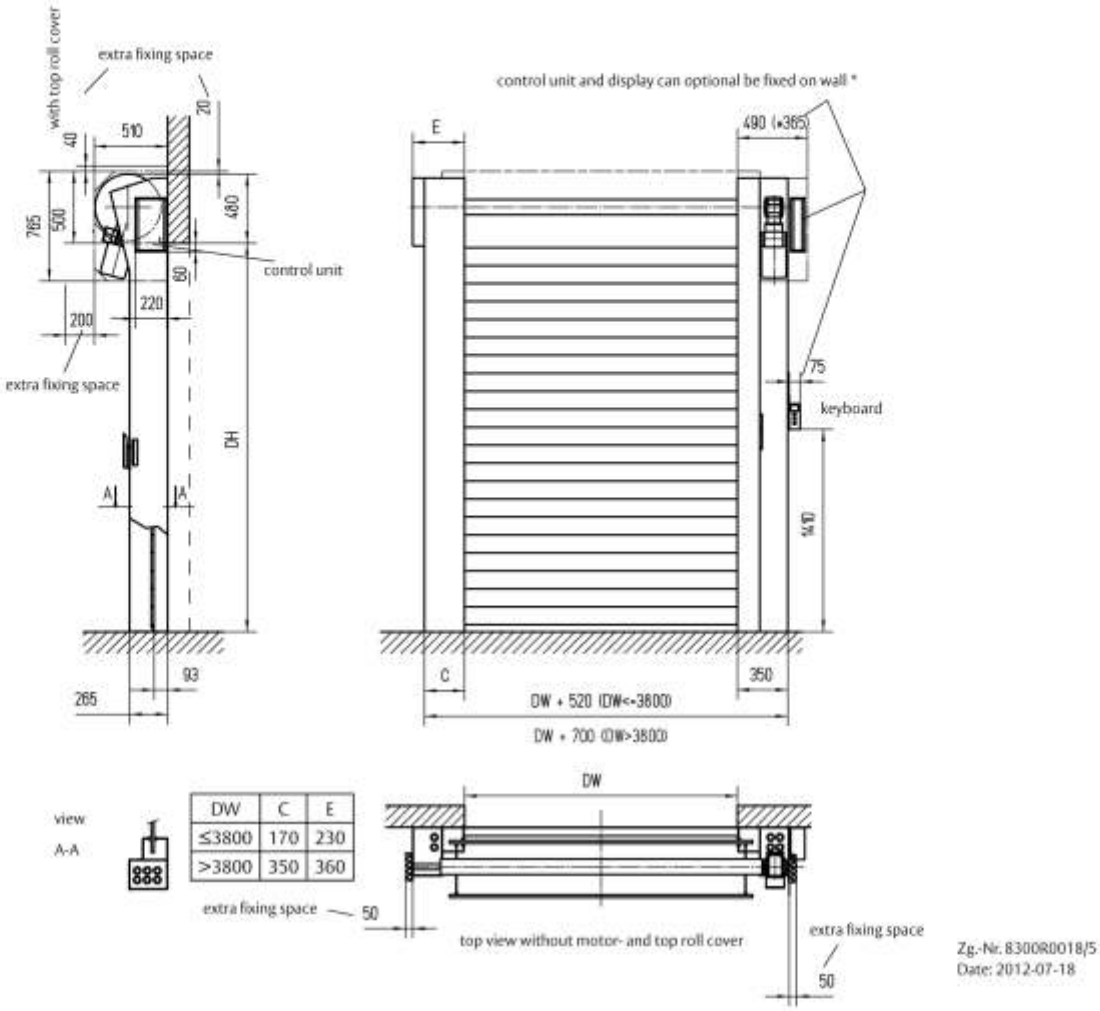

DW	C	E
≤3800	170	230
>3800	350	360

Zg.-Nr. 8300R0018/5
Date: 2012-07-18

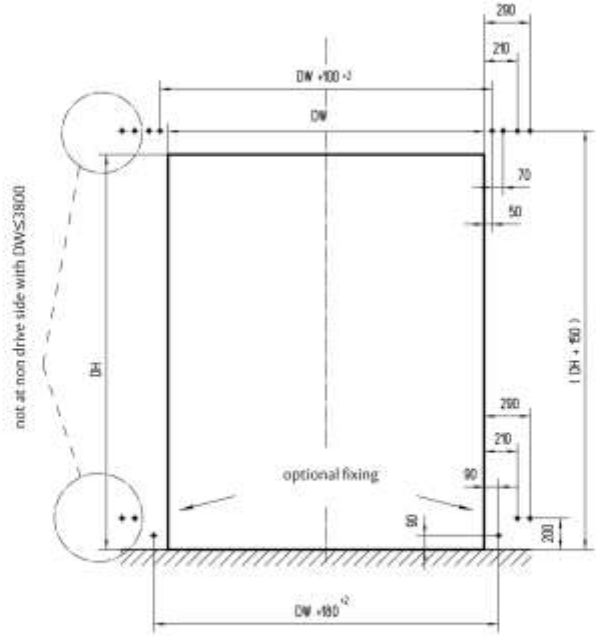

fixing screws M12 or comparables



Zg.-Nr. 8300R0019/ Rev.a
Date: 2006-05-22

ASSA ABLOY Entrance Systems is the leading supplier of entrance automation solutions for an efficient flow of goods and people. With a worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

ALBANY
ASSA ABLOY

www.assaabloyentrance.com

ASSA ABLOY Entrance Systems
Albany Door Systems

NIHVA
NIHVA Technologies Pvt. Ltd.

www.albanydoors.com

QR-Code
Get further informations by scanning the QR-code with your smartphone and a appropriate appication.

64 100 181/12/11 EN Technical data subject to change without notice Copyright by Albany ASSA ABLOY