
HYD CYL - Ø50 (Bore) X 35(Rod)X 493 (Stroke length) (Single Acting)

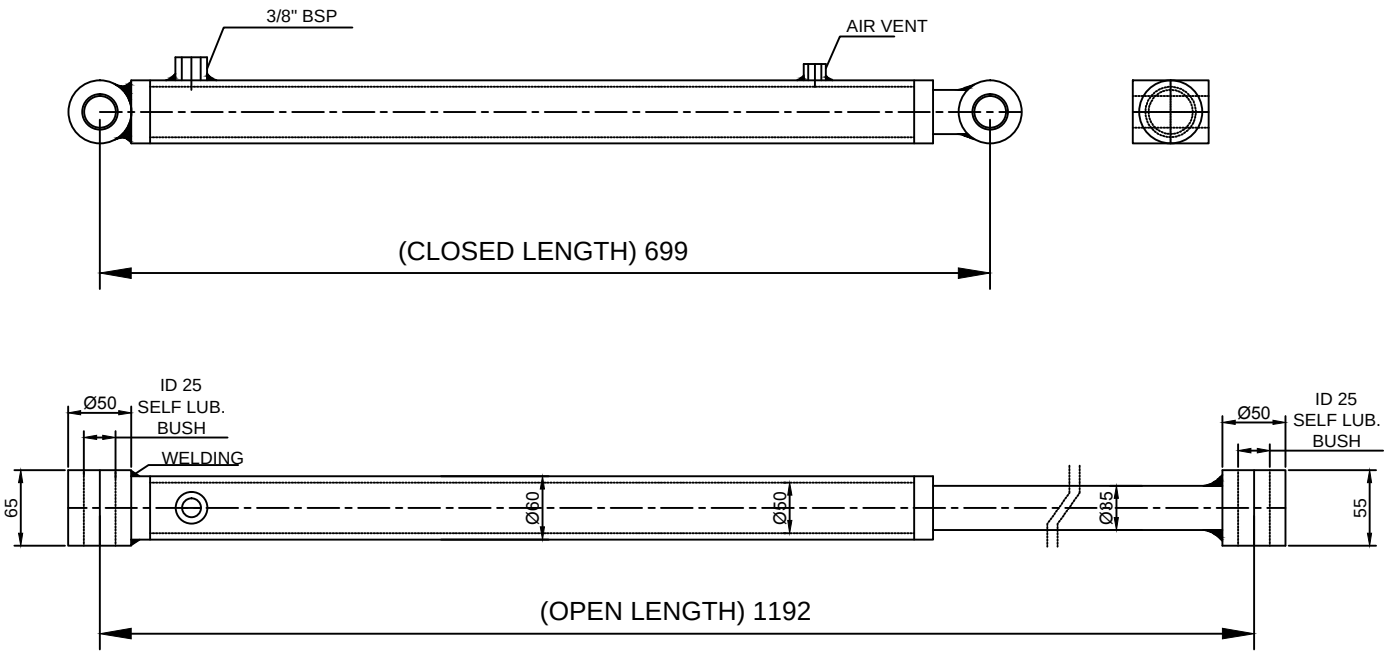

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 493 mm
- PISTON ROD :-Ø35mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :-180 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 3 NOS

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY

MATERIAL :

THICKNESS :

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

DECK LIFT CYLINDER(SINGLE ACTING)

CLIENT'S APPROVAL :

CLIENT -

PROJECT NO - DLBJ1001

SITE LOCATION -

DRAWING. NO. :- 0240

SCALE: NTS	WT:	SHEET:1 OF 1

DRAWN BY: P.A	DATE: 23.02.2017
CHECK : SHEKHAR	DATE: 23.02.2017
APPROVED : SHEKHAR	DATE: 23.02.2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSION ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT BE SOLD OR COPY TO ANY OTHER CONCERN.