UltraLite®

Technical Data Sheet


Ultralite® 3.00 mm Solid Embossed Polycarbonate sheet

UltraLite® 3.00 mm Embossed polycarbonate sheet

Controlled copy-R1 (January 2021)

UltraLite® 3.00 mm Solid embossed sheets are polycarbonate sheets offering:-

- Excellent Weathering Resistance
- Extreme Impact Strength
- Resistance to a wide range of temperatures

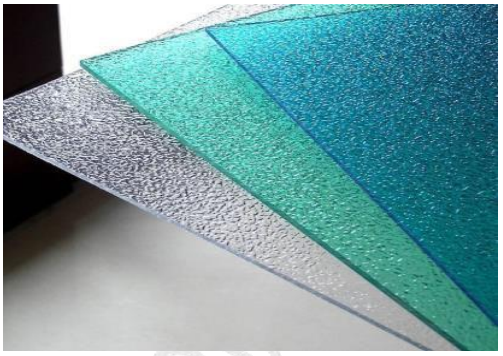

UltraLite® Solid embossed sheets PC Sheets offer you both choices UV and GP sheets.

Applications:

Typical applications for UltraLite® UV Coated Emboss sheets include: -

- lighting fixtures, luminaire covers, balcony guards, wall and door partitions.
- For both indoor and outdoor usage
- Any application where improved fire behavior is needed for fire safe solutions

Benefits:

- High impact resistance
- Excellent flammability performance
- High optical quality
- Excellent formability

Recyclable



Available Width:- 1220 mm and 2100 mm

Property	Test conditions	Typical Values	Unit	Test Method
Physical				
Density		1.2	kg/cm3	ISO 1183-1
Moisture absorption (equilibrium)	23°C/50%RH((equilibrium)	0.12	%	ISO 62
Moisture absorption (saturion)	Water at23°C(saturation)	0.30	%	ISO 62
Refractive Index		1.58	-	ISO 489
Light Transmission (LT) Clear	3.00 mm Clear	86	%	ASTM D 1003
Mechanical				
Tensile Modulus	1mm/min	2350	MPa	ISO 527-1,-2
Yield stress	50mm/min	65	%	ISO 527-1,-2
Yield strain	50mm/min	6.3	%	ISO 527-1,-2
Nominal strain at break	50mm/min	>50	%	ISO 527-1,-2
Flexural Modulus	2mm/min	2350	MPa	ISO 178
Flexural strength	2mm/min	96	MPa	ISO 178
Charpy impact strength	23°c, unnotched	No break	KJ/m^2	ISO 179-1eu
Charpy impact strength	23°c , 3 mm,notched	80P	KJ/m^2	ISO 179-1eu
Izod impact strength	23°c,3.2 mm, notched	70P	KJ/m^2	ISO 180-A
Thermal				
Vicat softening temperature	50N,50°C/h	148	°C	ISO 306
Thermal conductivity	23°c	0.20	W/(m.K)	ISO 8302
Coefficient of linear thermal expansion	23-55°c	0.65	$10^{-4}/K$	ISO 11359-1,-2
Temperature of deflection under load	1.8 Mpa	128	°C	ISO75-1,-2
Temperature of deflection under load	0.45 Mpa	141	°C	ISO75-1,-2
Fire resistance				UL-94

The mechanical properties were measured on sheets of 3mm thickness.

Product Liability Clause: This information and our technical advice whether verbal, in writing or by way of trials are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to verify the information currently provided especially that contained in our safety data and technical information sheets–and to test products as to their suitability for the intended processes and uses. The application, use and process in go for products and the products manufactured by you on the basis of our technical advice are beyond our control and, therefore, entirely your own responsibility. Our products are sold in accordance with the current version of our General Conditions of Sale and Delivery.