


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT


NOTES :-


1) Door Frame shall be fabricated from 1.2mmThk. Glav. steel sheets to form a double rebate profile & fixed to wall with Anchor bolts.
2) Shutter Panels shall be fabricated from 0.8mmThk. Galv.steel having Tray & Cover Construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm.& shutters shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. of SS Ball Bearing Butt Hinges shall be provided on each Shutter Size 4"x3"X3mm--
4) Dorma PHCR 1000 Panic bar with Outsie trim
5) SS D Handle Pair

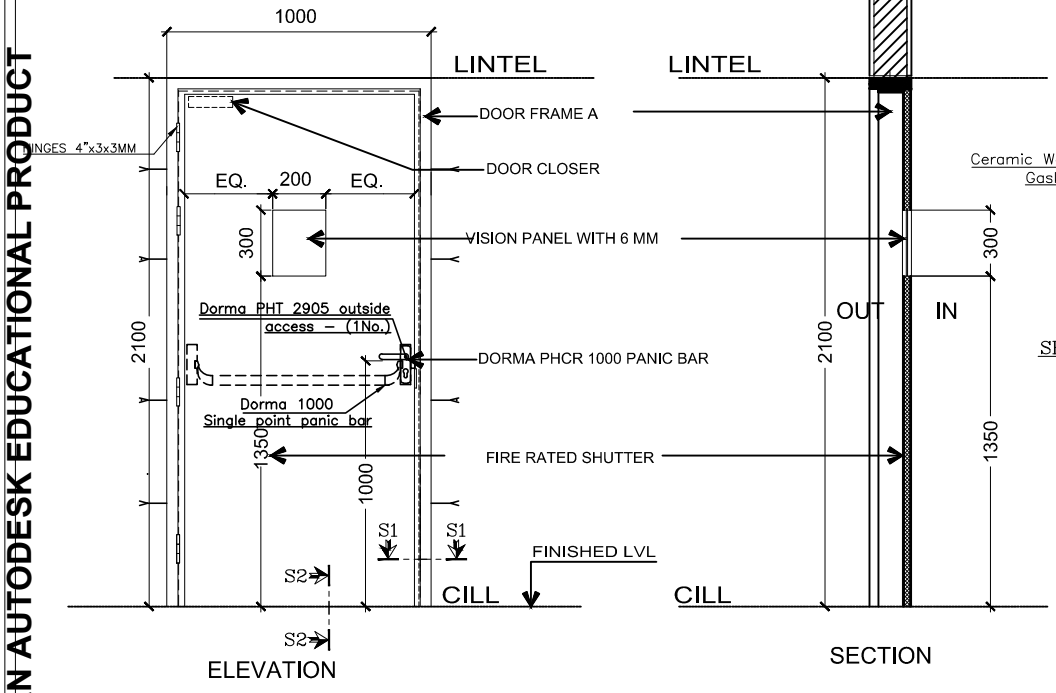



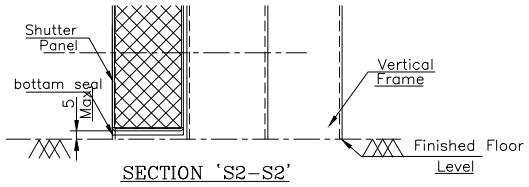

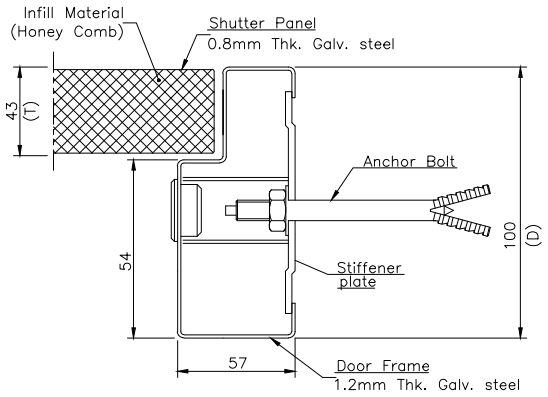

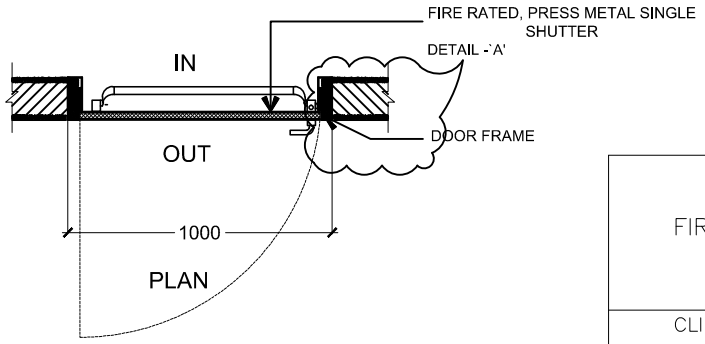

TYPE A- 1000X2100
2hr,FIRE RATED, PRESS METAL SINGLE SHUTTER

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern

TITLE	ALL DIMENSION ARE IN mm			NIHVA TECHNOLOGY PVT. LTD. PUNE
FIRE DOOR		SIGN	DATE	NIHVA TECHNOLOGIES PVT. LTD. Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	DRAWN	ABHIJIT	16/10/15	CLIENT - SKIPPER ELECTRICALS
CLIENT APPROVAL	CHECK	ANIL	16/10/15	PROJECT -
	REV.			SITE -
	APPRD.			DWG. NO. -NIHVA/15-16/147
	MFG			SCALE: 01 | WT: | SHEET: 01OF01
	Ref. No.			If any queries contact : projects@nihva.com

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT