

Abbrevation's:
WOW-Wall Opening Width
WOH-Wall Opening Height
UC-Under Cut
FFL-Finished Floor Level

ASSESORIES DETALES


(a) HINGES: SS Ball bearing butt hinges 100x75x3mm

(b) LOCK : Panic Bar
External trim


(c) DOOR CLOSER

(d) GLASS : 1No. Clear fire Vision Glass size 200x300mm.

Shutter thickness : 47 mm
Frame Sheet thick : 1.20mm
Shutter sheet thick : 0.80mm
Fixing : On Soliid Brick plasterd wall with Anchors

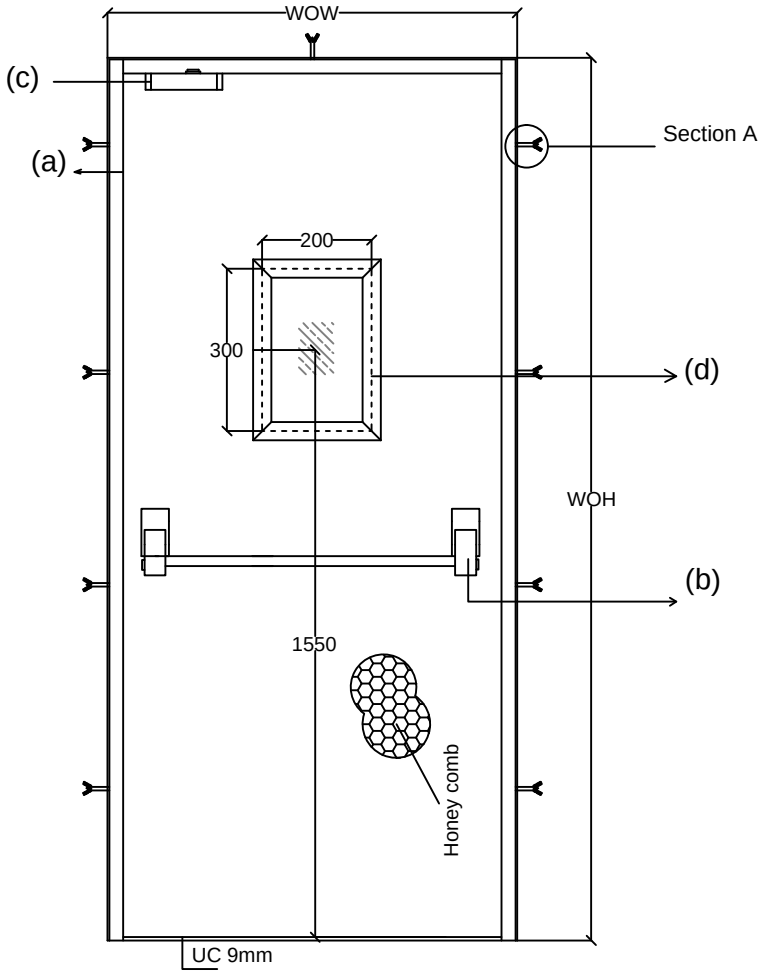

Inside Elevation

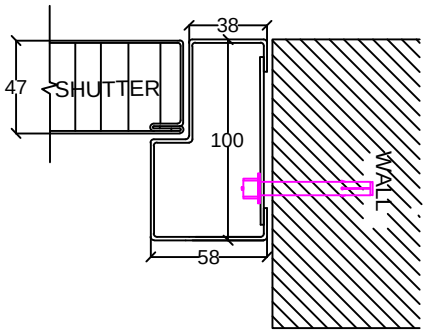


Detail view of Section A

NOTE:- *All Dimensions are in mm.
*Tolerance:-All Linear Dimensions ±3mm,Others ±0.5mm.
*The Drawing Is For Location of Hardware only. Drawing Does Not Represent The Hardware For More Clarity, Please Go Through Hardware Broucher.

DOOR TYPE	WOW	WOH	TYPE 3 (LHR)	TYPE 4 (RHR)	TOTAL
2 HOURS FIRE RATED FIRE EXIT DOOR	1113	2380	1	3	4
	1000	2100		1	1
FIRE EXIT DOOR	1113	2380	4	6	10

COLOR- SOFT GREY



Top View

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

Fire Door

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	01/04/16	
CHECK	ANIL	01/04/16	
REV.	00		
APPRD.			
MFG			

CLIENT APPROVAL

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:-www.nihva.com

CLIENT -
PROJECT -
SITE -
DWG. NO. - NIHVA/15-16/
SCALE: 01 | WT: | SHEET: 01 OF 01
If any queries contact : projects@nihva.com