# High performance door
# Albany RR3000 Series

ASSA ABLOY

ASSA ABLOY Entrance Systems

The global leader in
door opening solutions



# The Albany RR3000 Series

Albany RR3000 series combine the greatest functionality with modern design. Their outstanding engineering makes the doors extremely fast, safe, robust and guarantees an extremely long service life with low maintenance needs. The stylish modern design, achieved by using flat aluminium slats and large windows, ensures an attractive appearance and perfect integration into building facades.

## VARIETY OF MODELS

Apart from the illustrated standard version of the Albany RR3000 there are several versions available: The Albany RR3000 R for confined assembley spaces, the Albany RR3000 XXL for large openings, the Albany RR3000 Vision for a high level of transparency. Please apply to the seperate data sheet for details regarding our new hybrid door Albany RR3000 ISO with a high degree of insulation.

## DOOR MATERIAL

The side frames are manufactured from galvanised steel and can optionally be powder-coated in a wide variety of RAL colours.

## DOOR CURTAIN

The following designs are available:

- Doulbe-walled aluminium slats, anodized without windows, optional with window slats made of impact resistant Polycarbonate (PC)
- Clear Polycarbonate (PC) window slats, transparency > 70%
- Perforated slats

The aluminium slats can be coated in a wide variety of RAL colours, custom colours are also possible.

## ACTUATORS

Modifications to individual required functions can be implemented with additional safety devices such as infrared or radar motion detectors and a wide variety of industrial actuators (switches, induction loops, radio transmitters etc.). We are happy to advise you and put together a tailor-made configuration for you.

## BOTTOM PROFILE

A profile with a lengthened flexible seal, which may optionally be extended, is used to seal the door against the floor.

## MATCHING PEDESTRIAN DOOR

If desired, a pedestrian door of identical appearance can be supplied as a option.



## RAPID SERVICING AND MAINTENANCE

The entire door structure has been developed with minimum service and maintenance effort in mind. For example, thanks to their individual fastening at the rubber belt, each slat can be replaced individually, rapidly and easily.



## INSULATION

For an optimum of thermal insulation with a minimum of heat loss we have added our new hybrid door Albany RR3000 ISO to our range. All details can be found on our seperate data sheet.

ASSA ABLOY, Besam, Crawford, Megadoor and Albany, as words and logos, are examples of trademarks owned by ASSA ABLOY Entrance Systems or companies within the ASSA ABLOY Group.

## CONTACTLESS WINDING

The innovative DiscDrive technology used in the Albany RR3000 supports the door curtain movement thereby ensuring a long service life. The aluminium slats are wound onto winding discs without contact. Using this technology, the door can be opened and closed very quickly and with very low wear.



## MOTOR AND TOP ROLL COVER

Motor and top roll covers of anodised aluminium are available as an option. Inspection covers to the side can be opened for servicing work.



## MOTOR POSITION

The gear motor can be positioned on the right or on the left side of the door. The drive is integrated into the side frame in the Albany RR3000 R.

## CONTROL SYSTEM

The Albany RR3000 is equipped as standard with the Albany MCC frequency converter control, which permits high opening and closing speeds, and also a gentle, quiet, and hence low-wear motion sequence.

The compact control unit is integrated in the door's design and mounted beside the drive. The hardware and software can be customised to meet customer-specific requirements and expanded by additional functions as needed.




## CONTROL UNIT

The user-friendly graphical control unit with a display gives the user information about the current status of the door and all of the important technical parameters by means of plain text at any time.
In addition, the system stores all operating and service data and shows for example, when a new service date is pending.



## MANUAL ACTIVATION

In the event of a power failure the door can be opened manually with the use of a brake release handle. The door is partially opened automatically by a spring system in the side frames.



## SAFETY FEATURES

The Albany RR3000 is equipped as standard with a contactless, pre-running photocell on the leading closing edge and a stationary photocell which prevent the door from closing as long as persons or objects are in the closing plane.



## WIND LOADS

Depending on the model and door size, the Albany RR3000 meets the requirements of classes 2, 3 or 4 as specified in EN 12424.








# The basic model Albany RR3000

- The exterior door for busy doorways
- High opening speed (max. 2,3 m/s)
- High wind class 3 / 4 in accordance with EN 12424
- Dimensions up to 5 x 5 m
- Double-walled aluminium slat curtain, optionally with windows or perforated slats for ventilation
- Good noise insulation
- Optionally also available as a laser protection door






GLASS LOOK

# The transparent one
## Albany RR3000 Vision

Basic model

+ Maximum transparency and translucency > 70%
+ Large, crystal-clear Polycarbonate PC panes, set in anodized aluminium profiles
+ Ideal for use in showrooms








## The space-saver
## Albany RR3000 R

Basic model
+ Minimum lintel space
+ Motor built into the side frame
+ Slender side frames for doors ≤ 3,8 m wide
+ Curtain variants with perforated slats
+ Ideal for use in underground garages





SIZE XXL

## The big one
## Albany RR3000 XXL

Basic model
+ Can be supplied in sizes up to 8 m wide and 6 m high
+ Ideal for use in industrial buildings of large vehicles traffic





ENERGY EFFICIENCY made in Germany

## Our new energy efficient hybrid high performance door Albany RR3000 ISO

The Albany RR3000 is part of the 3000 range. The lamellas wind up contactless ensuring a quiet and a low wear door run.

The standard curtain of the Albany RR3000 ISO is made of high insulating thermally seperated sandwich lamellas with a 50 mm thick foam core and silver coloured metal sheet covers (RAL 9006).

Please refer to our seperate data sheet for further details regarding this product.

# Albany RR3000 Series High performance door

| TECHNICAL DATA | Albany RR3000 | Albany RR3000 Vision | Albany RR |
|---|---|---|---|
| Application | As an exterior or interior door<br>also suitable as a laser protection door | Suitable as an exterior or interior door | As an exterior or interior d<br>machinery protection doo |
| Wind resistance | Class 3 – 4 - EN 12424 | Class 3 – 4 - EN 12424 | Class 3 – 4 - EN 12424 |
| Door dimension (mm)<br>(DW min./max.)<br>(DH min./max.)<br>Door area<br>Side frame excluding motor | <br>600 / 5000 mm<br>2500 / 5000 mm<br>25 m²<br>325 mm | <br>600 / 5000 mm<br>2500 / 5000 mm<br>25 m²<br>325 mm | <br>600 / 6000 mm<br>1500 / 3000 mm [1]<br>18 m²<br>220 mm (360 mm for wid |
| Opening direction | vertical | | |
| Covers<br>Top roll cover/motor cover | • Aluminium [1] | | |
| **Surface material** | | | |
| Side frames | ✓ Galvanised steel<br>• RAL powder-coated | | |
| **Door curtain** | | | |
| Anodised aluminium slats | ✓ | – | ✓ |
| Isolation | • | – | • |
| Coloured profiles (RAL) | • | – | • |
| Profiles with windows | • | – | • |
| Anodised aluminium with crystal clear Polycarbonate panes | – | ✓ | – |
| Lengthened flexible seal | • | • | • |
| **Drive unit/control system** | | | |
| Drive unit | electric | | |
| Albany MCC | ✓ | ✓ | ✓ |
| Chain drive to reduce the mounting space to the side | • | • | – |
| Motor power | 1,1 kW | | |
| Opening/closing speed up to max. | 2,3 / 0,7 m/s | 1,8 / 0,7 m/s | 2,0 / 0,6 m/s |
| Fuse protection | 10 A | | |
| Control voltage | 24 V DC | | |
| Protection degree | IP 55 | | |
| Mains connection | 3L/(N)/PE 380/400/415/440/480V, 50/60 Hz / Vortrafo erforderlich für | | |
| Additional opening height | ✓ | ✓ | ✓ |
| Potential-free contacts | • | • | • |
| **Safety** | | | |
| Electrical safety contact edge | • | – | • |
| Door line photocell | ✓ | ✓ | ✓ |
| Pre-running photocell | ✓ | ✓ | ✓ |
| Curtain tension | ✓ | ✓ | ✓ |
| Counterbalance | ✓ | ✓ | ✓ |
| Self-opening, partial | ✓ | ✓ | ✓ |
| Mannual operation with Bowden cable | ✓ | ✓ | ✓ |
| Break release lever outside | • | • | • |
| **Traffic light function** | | | |
| Without direction detection | ✓ 24 V DC | | |
| With direction detection | ✓ 24 V DC | | |
| Flashing alarm light | ✓ 24 V DC | | |
| Error message | ✓ Text | | |

| R3000 R | Albany RR3000 XXL |
|---|---|
| oor and as a laser or r | As an exterior or interior door |
| | Class 3 – 4 - EN 12424 |
| th > 3800) | 1000 / 8000 mm<br>2500 / 6000 mm<br>36 m²<br>350 mm |
| | |
| | |
| | |
| | |
| | ✓ |
| | • |
| | • |
| | • |
| | – |
| | • |
| | |
| | |
| | ✓ |
| | – |
| | |
| | 1,8 / 0,6 m/s |
| | |
| | |
| 220/230/500V | |
| | ✓ |
| | • |
| | |
| | • |
| | ✓ |
| | ✓ |
| | – |
| | ✓ |
| | ✓ |
| | ✓ |
| | • |
| | |
| | |
| | |
| | |




## ALBANY RR3000 ISO

Please refer to our seperate data sheet for the technical data of the Albany RR3000 ISO.

## SAFETY

The door is designed according to the Workplace Directive of the UVV regulations and the harmonized CE Guidelines including the EN 13241-1.

## NOTES

The door safety devices are designed for the normal use of power-operated doors in accordance with the harmonized CE Guidelines. In addition to this, difficult environmental conditions may affect the proper use. For more information or to schedule an on-site inspection, please contact an ASSA ABLOY Entrance Systems sales engineer for Albany Procucts.

- • Option
- ✓ Standard
- – not possible

1) For doors with a height < 2500 mm the use of top roll and motor cover is required according to standard EN 13241-1.



Underground garage



Facade design



Logistics




Logistics



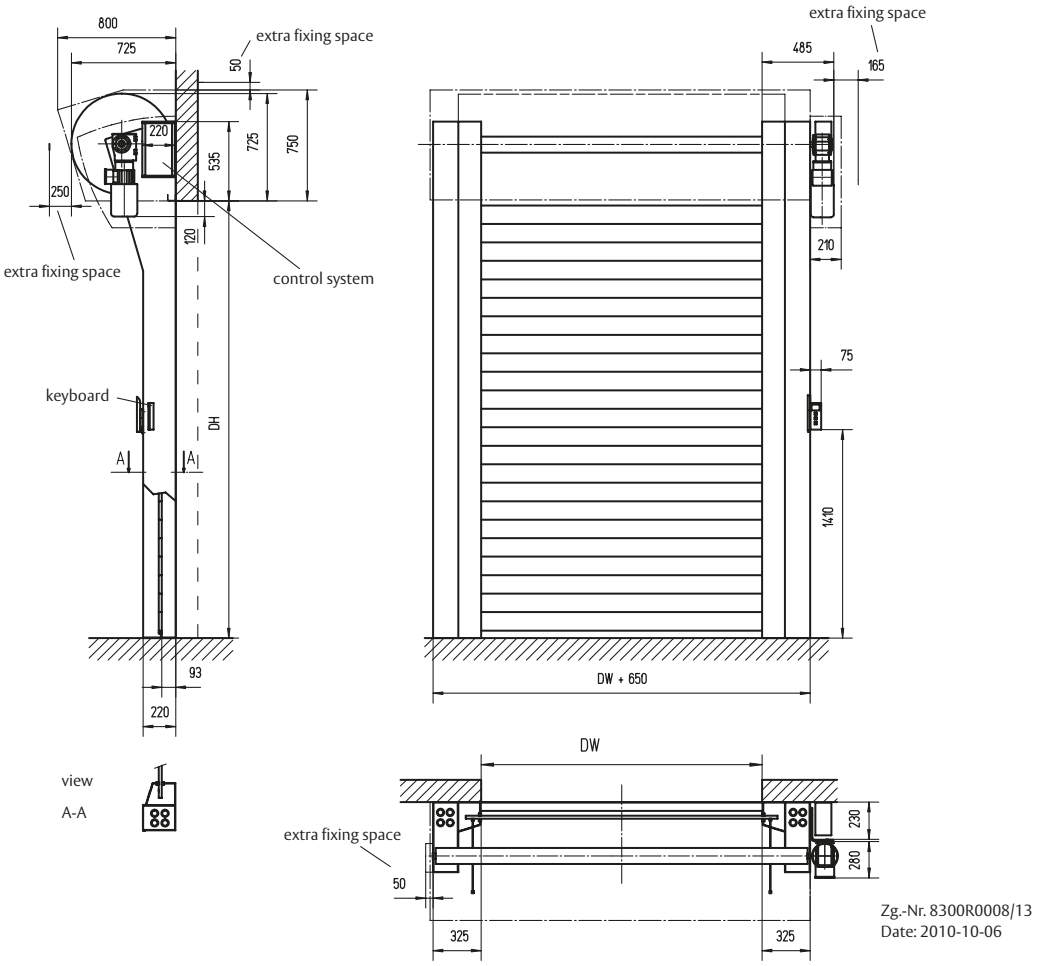
Paint design



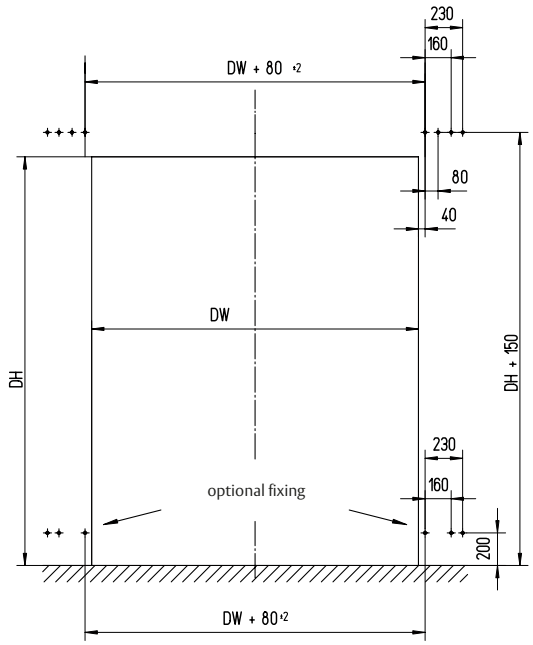

Car dealer test facility

# General drawing / Fixing plan


## Albany RR3000 / RR3000 Vision




Zg.-Nr. 8300R0008/13
Date: 2010-10-06



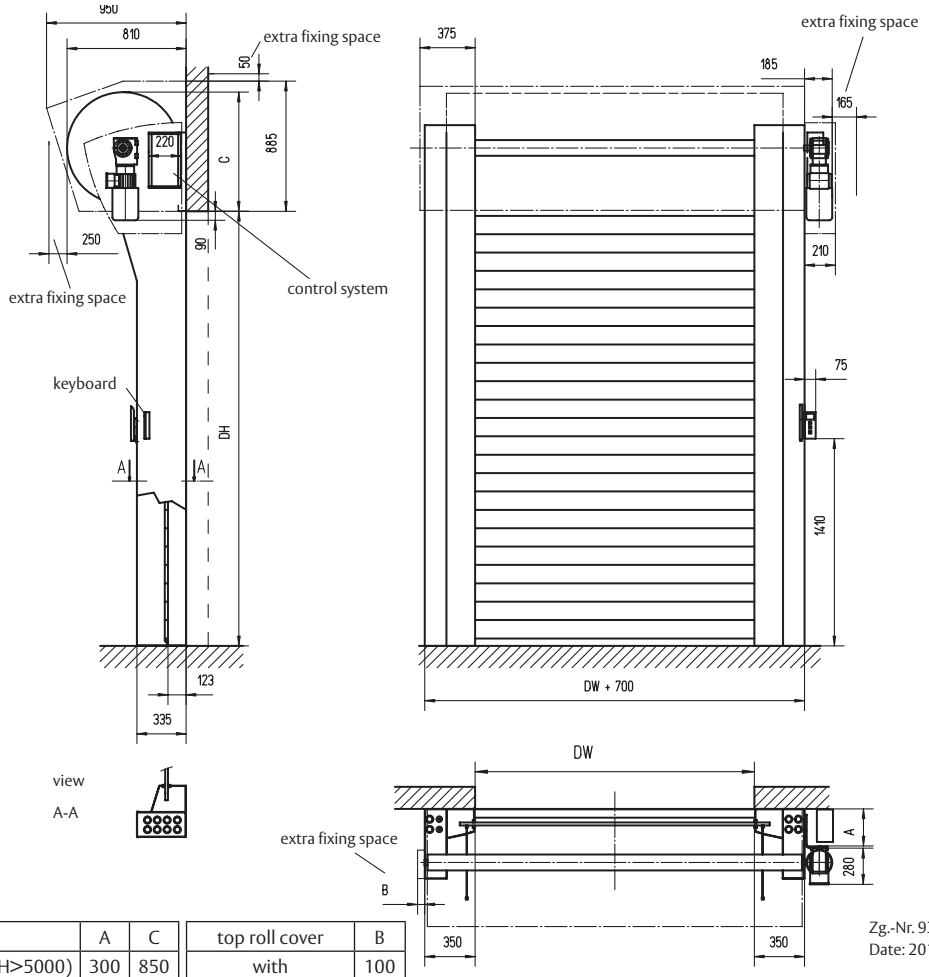

fixing screws M12 or comparables




Zg.-Nr. 8300R0007/4
Date: 2010-11-22

# General drawing / Fixing plan

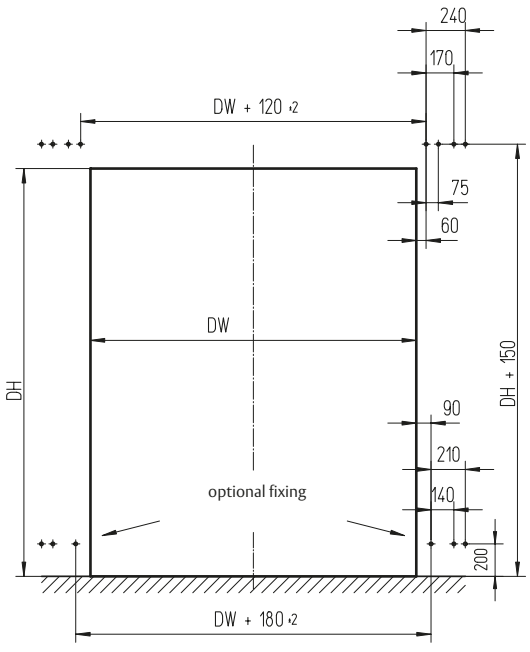
## Albany RR3000 XXL



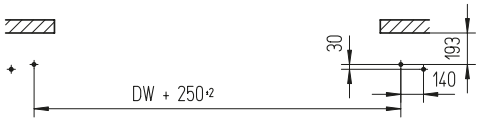

| | A | C |
|---|---|---|
| RR3000 XXL (DH>5000) | 300 | 850 |
| RR3000 XXL (DH≤5000) | 270 | 740 |

| top roll cover | B |
|---|---|
| with | 100 |
| without | 50 |

Zg.-Nr. 9300R0008 Rev.o
Date: 2012-07-17



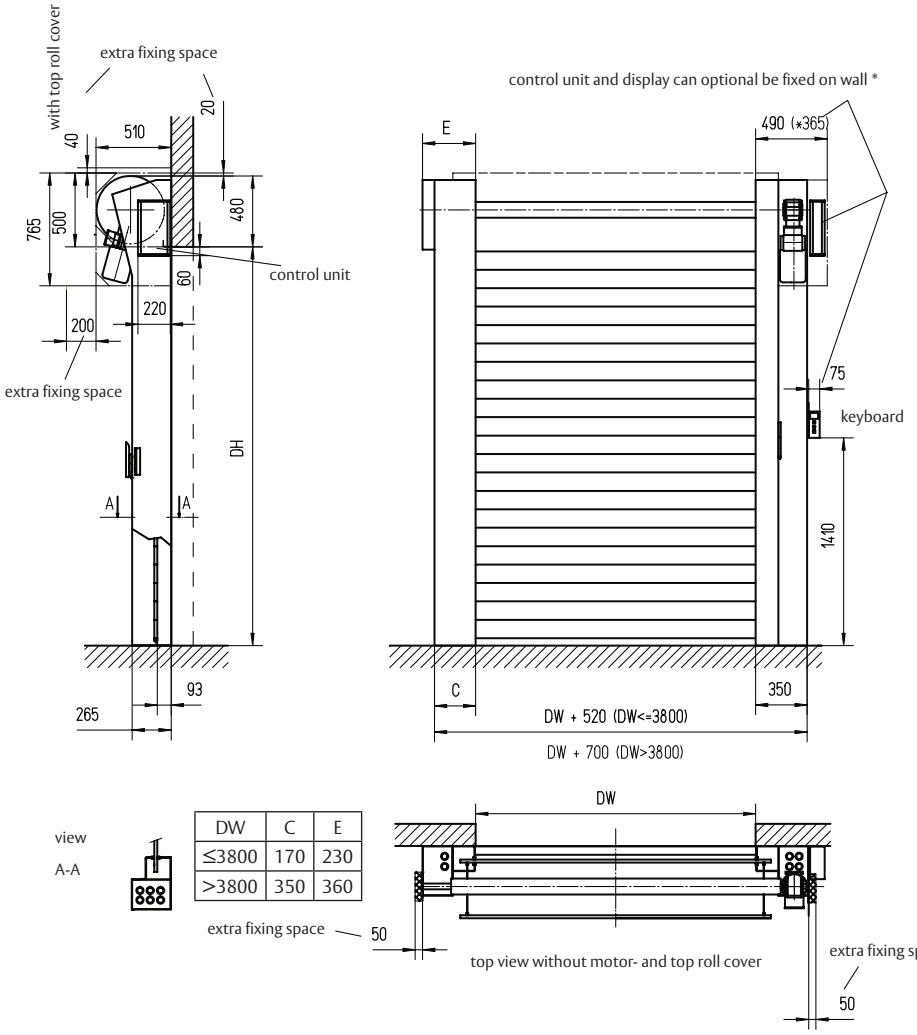

fixing screws M12 or comparables



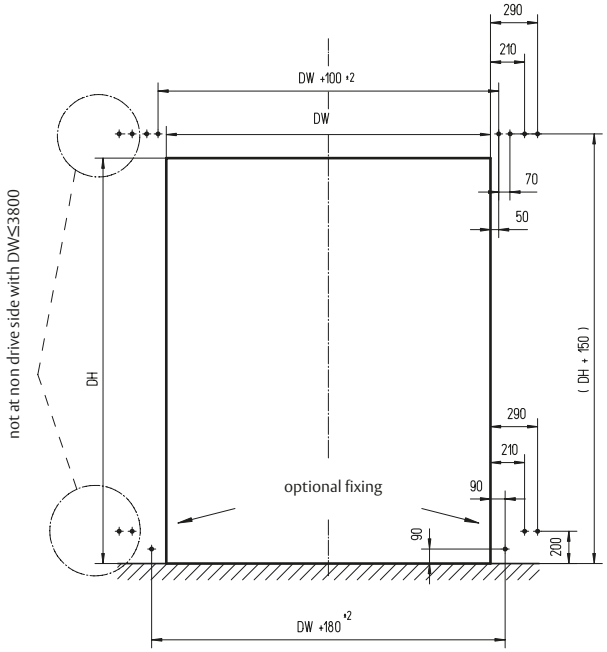

Zg.-Nr. 8300R0030
Date: 2008-10-15

# General drawing / Fixing plan


## Albany RR3000 R




Zg.-Nr. 8300R0018/5
Date: 2012-07-18



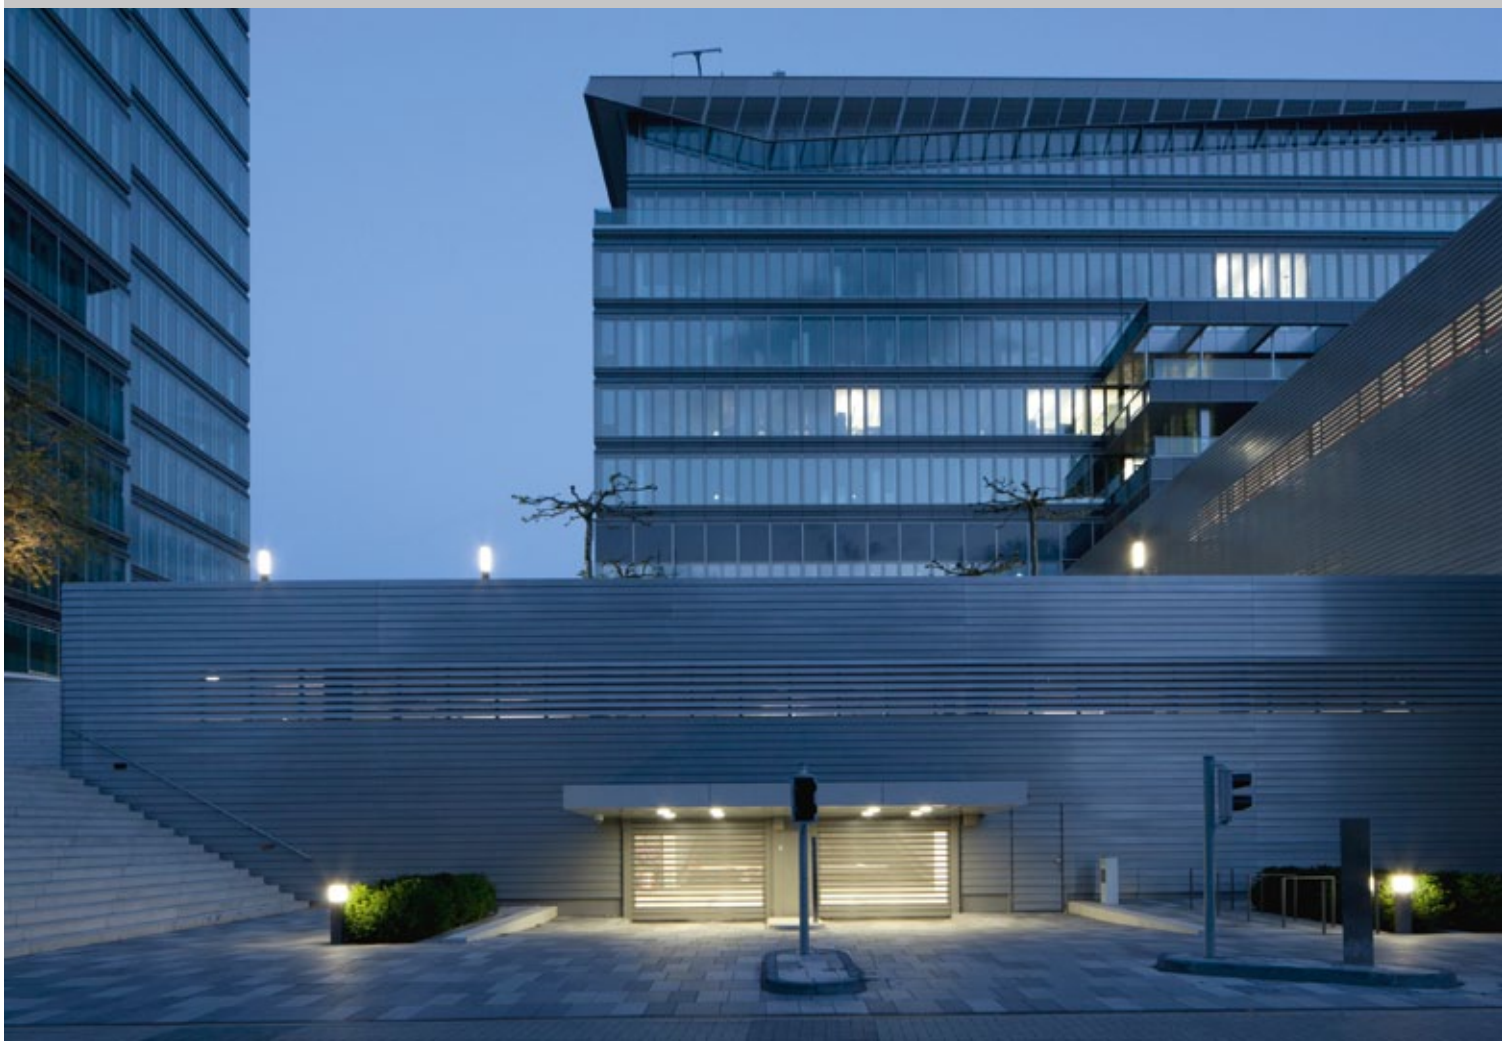

fixing screws M12 or comparables




Zg.-Nr. 8300R0019/ Rev.a
Date: 2006-05-22

ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our globally recognized product brands Besam, Crawford, Megadoor and Albany, we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations.
ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

assaabloyentrance.com



ASSA ABLOY Entrance Systems

info.aaes@assaabloy.com
assaabloyentrance.com

Follow us:

Please enter *ASSA ABLOY Entrance* in the channel's search field.

Technical data subject to change without notice

© ASSA ABLOY Entrance Systems AB PL.MAN/Albany RR3000 Series/DEU.EN-1.1/1412/64 100 181