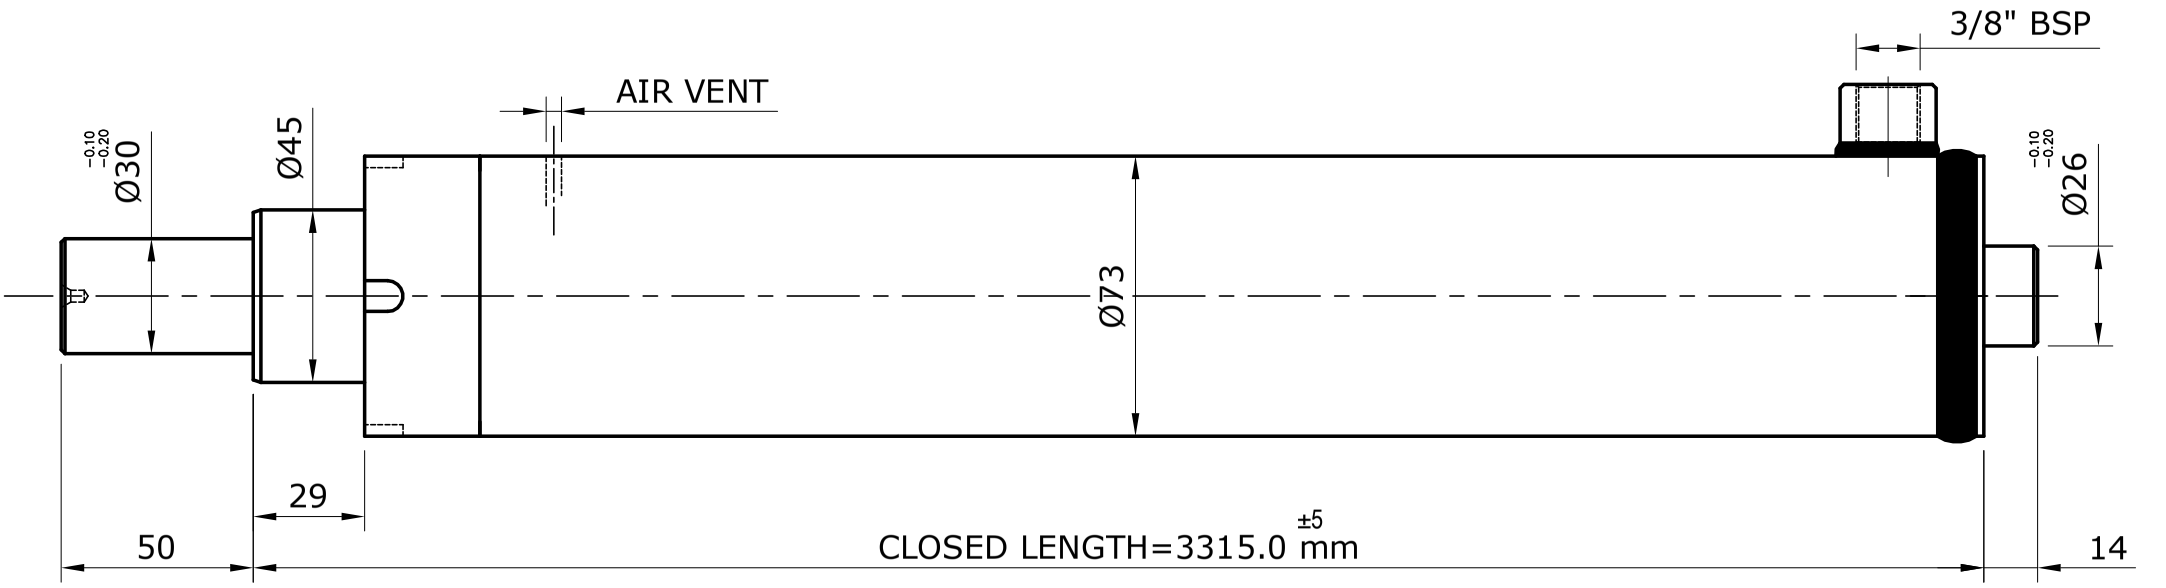


SPECIFICATIONS :–

S/A WELDED CONSTRUCTION HYD. CYL.

BORE – ø63mm

PISTON ROD – ø45mm

STROKE – 2978mm$^{\pm 5}$

MTG – AS PER DRG.

Wkg. PRESSURE –160 BAR,

Testing Pressure –210 BAR,

CLIENT:– M/S. NIHVA TECHNOLOGIES PVT. LTD.

DUTTA CONTROL

GAT NO.83,JYOTIBANAGAR,
TALWADE,TAL–HAVELI,
PUNE–412114 (INDIA)

DUTTA

	NAME
DGN.	
DRN.	SUYOG
CHD.	R.S.C.
APPD.	
DATE	21/12/22

ALL DIMENSIONS ARE IN mm.

SCALE–1:1

DRG. NAME
G.A.DRG. FOR ø63x2978 STROKE
SINGLE ACTING HYD. CYL.

DRG. NO.
21_12_001_63_2978