GMP Technical Solutions

ISO 9001:2000



METAL DOORSETS

www.gmpcleanrooms.com



Company Profile

GMP Technical Solutions (GMP) is an ISO 9001:2000 Certified company and is one of the largest manufacturers of Clean Room Partitioning Systems and Turnkey Solution Provider within the Indian subcontinent. Established in year 2005, GMP has its corporate office at Mumbai & branch offices in major Indian cities like Noida, Goa, Bangalore, Indore, Hyderabad and state-of-the-art manufacturing facility at Baddi in Himachal Pradesh, INDIA. A team of over 700 professionals support Indian & International operations of our esteemed clients in the fields of Clean Room Technology, Building Management Systems, IBMS, IT & Networking, HVAC and Electricals.

We provide cost effective Enterprise Solutions & Turnkey services tailored to specific projects and typical requirements. GMP's strong customer-focused approach and the continuous quest for world-class quality have enabled us to attain and sustain Clean Room technology lead in Indian subcontinent.

Our thrust on international business has seen overseas earnings grow significantly. The company's businesses are supported by a wide marketing and distribution network, and have established a reputation for strong customer support.

At GMP, we believe that progress must be achieved in harmony with the environment. A commitment to environmental protection is an integral part of the corporate vision.

GMP Metal Doorsets

GMP Metal Doorsets are specifically tailored to the requirements of the market with special attention being paid to the use of galvanised steel throughout.

GMP Metal Doorsets are available in different configurations to satisfy the client's requirements. In addition to single leaf and double leaf frames, with removable overpanels, borrowed light and glazing can be introduced.

GMP Commercial Door

High duty general purpose meta doorsets are available in sizes up to 2600mm wide double doorsets and 3000mm high.

Capable of accepting glazing in many configurations with air vents, louvers and a wide range of hardware. Finish coated in primer or epoxy polyester powder paint as standard.

GMP Fire Door

Available in fire resistant levels from 30 minutes up to 2 hours all tested to BS 476 Part 20 & 22, IS3614 (Part 2) Apporved by CBRI (Roorkee), Warringtonfire (UK) and UL (USA). These doorsets can be made in very large sizes with options for glazing, fire resistant self closing louvers, single or double doorsets, optional fixed overpanels and optional temperature rise (insulation) configurations.

GMP Secure Door

Special attention is paid to construction details and the addition of security hinges, multi-point locks, reinforced laminated cores and high security glazing which produces a range of secure doorsets that are suitable for high security applications. The level of protection required will determine the degree of sophistication of construction.

GMP Acoustic Door

By the introduction of special linings, seals and structurally bonded cores, a high level of sound reduction can be achieved. Consult the design office for further information.

GMP Metal Doorsets



Metal Doorsets

Metal doorsets are manufactured from prime quality stretched cold formed steel sheet to ASTM A527 ASTM A525, JISG 3302/1994, BS 2989. Door frames are

pressed from 1.5 mm thick galvanized steel sheet with mitred and welded construction.

Hinge reinforcements for either 1 pair or 11/2 pair of hinges are manufactured from 4mm thick steel plate and welded to the frame.

The door leaf is manufactured from 0.8/1mm thick galvanized steel sheet with lock formed edges. It is insulated and bonded with infill of honeycombed paper

core/mineral wool, forming a rigid flush-fitting stress-free level leaf that will withstand high levels of duty without failure.

Innovative flush double glazed 400x800mm vision panels are available, constructed with vacuum-sealed 6mm clear toughened glazing units.

Finished in polyester powder coating of 60/80 microns forming a smooth surface finish.

Standard Steel Sheet Thickness

Metal types

Electro Galvanized Steel, EG (Pure Zn, ASTM A591)

Galvannealed Steel (with A60 Zinc Coating conformation to ASTM A25)

Cold Rolled Steel (ASTM 366-91)

Stainless Steel (Type 304 stainless steel,# 4 finish PVC coated)


DOOR : 0.6mm (24 gauge), 0.8mm (22 gauge), 1.0mm (20 gauge) {Rolled Seams}

1.2mm (18 gauge), 1.6mm (16 gauge) {Welded Seams}


Frame : 1.6mm (16 gauge) {Mitre/ welded corners and knock-down bolted frames}

Door Elevation

Single Door Elevation

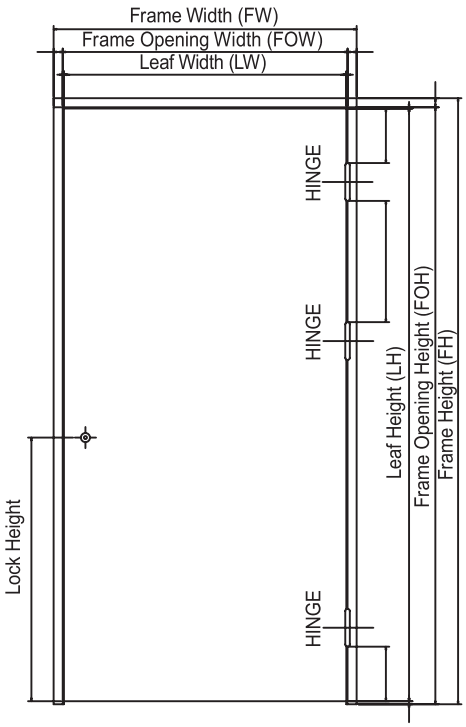

Double Door Elevation

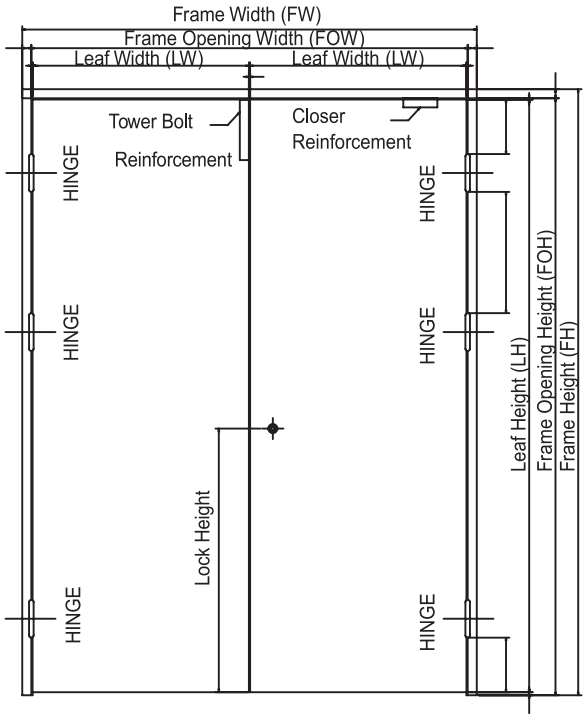





Model Specifications

Description	- GMP Metal Doorsets and Frames
Construction sheet	- Door leaf from 1.0mm (1.2mm) (1.6mm) thick slip coated pre-galvanised steel to ASTM A527/ASTM A525, JISG3302 or BS 2989 (1994). Zinc coating 80-120 g/m2. Lock formed panels with internal stiffeners, 3.0mm thick hinge reinforcing, hardware mounting plates and lock protection. Door frame from 1.2mm (1.6mm) (2.0mm) thick pre-galvanised steel sheet with mitred and welded corners, frame stretchers, hinge reinforcing plates, fixing plate and hardware mounting plates.
Core Materials	- Door leaf filled with either rockwool, honeycomb, PUF infill dependant on duty.
Finish	- Powder coated surface.
Fixings	- Fixing through frame by expansion bolt.- Mortar straps.
Frame Assembly	- Welded construction with frame spreaders. - Bolted frame construction. - Knock-down frame construction for wrap around frames.
Glazing	- Glazing to door leaf. - Glazed overpanels in frames.
Louvers	- Louver panels to door leaves. - Fire resistant ventilators.
Fire Resistant	- Up to 2 hours fire resistance in accordance with BS 476 Part 20 & 22, IS3614 (Part 2) dependant on construction.
Acoustic Properties	- Up to RW 44 for 60mm thick doorleaves with special frames and ancillary seals.
Sizes	- Up to 3000 mm high and 3000 mm wide subject to test data limitations.


Ironmongery









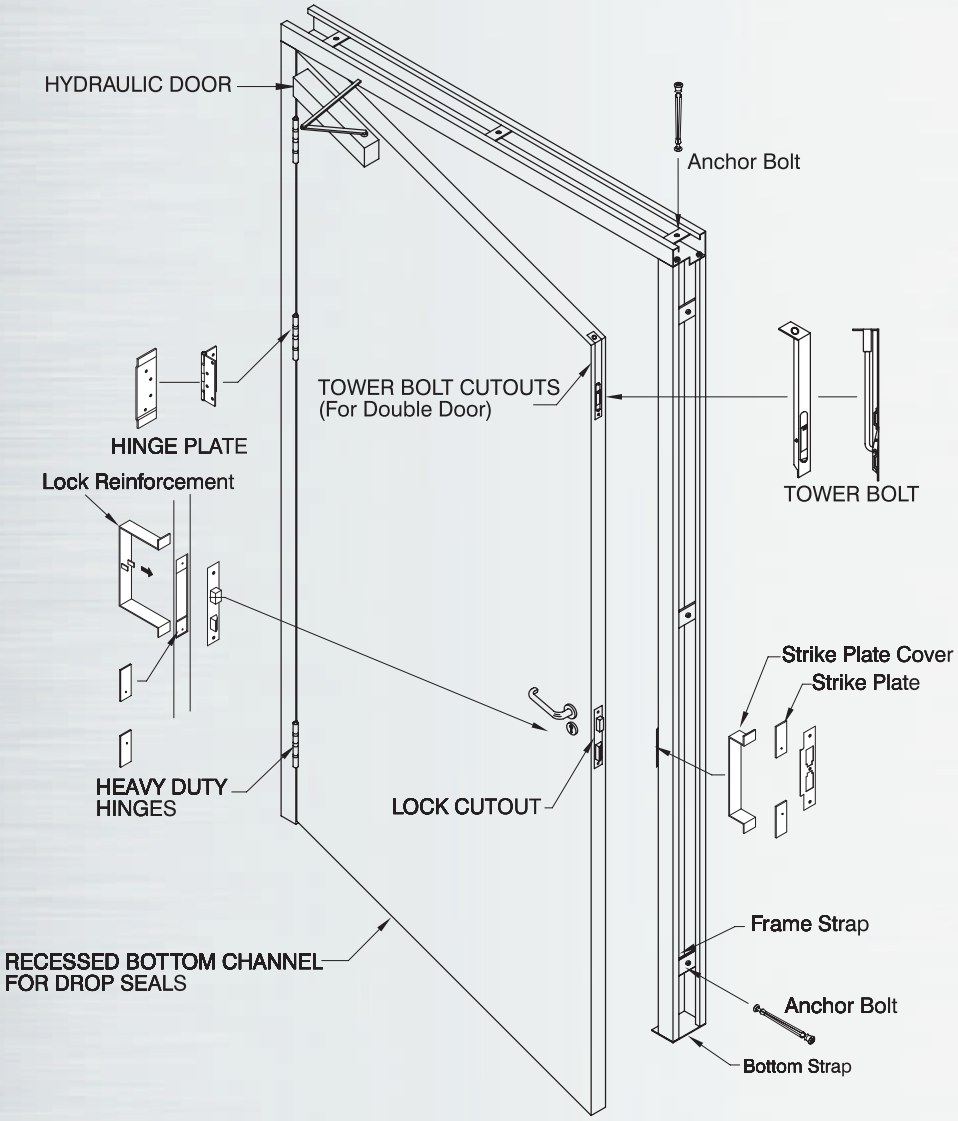

DOOR LEAF

(GPSP) ASTM A527/ ASTM A525, JIS G 3302 or BS 2989 (1194)

Zinc Coating 120-180 g/m2. Lock formed, 4mm thick hinge, reinforcing plates,

hardware mounting plates and lock reinforcement.

DOOR FRAME

GPSP sheet with welded or knock-down constructions with 4mm hinge reinforcing plates,

fixing straps, hardware mounting plates and mortar guards.

CORE MATERIAL

Non-combustible mineral fibre infil.


FINISH

Powder coated.

Fire Door Certifications





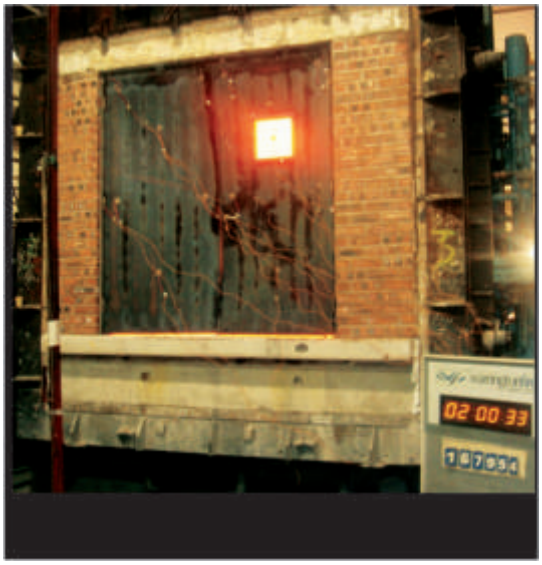

Underwriters Laboratories

C.B.R.I. INDIA

warringtonfire global safety

Fire Door Specifications

Test Standards

2Hrs.Fire Rated Metal Doors all tested to BS 476 Part 20 & 22 and IS:3614, (Part 2)

Approved by CBRI (Roorkee), also approved by Warrington Fire (UK) & UL(USA)

10B & 10C dependant on construction

Door Leaf

44 mm thick Shutter sheet thickness is 1.0 mm, Infill material is Rock Wool (40 kg /cu.m)

Door Frame

100 x50 mm Frame size, sheet thickness is 1.5mm.

Infill

Rockwool of density (40-45 kg/cu.m)

Finish

Doors is Pure Polyester Powder Coated (Jotun Make) 60-80 Micron,

Ironmongery

All Complete Ironmongery is from DORMA , DOYEN, OR any other Compatible Make Fire Door Including provision of Standard size of Vision panel of 6 mm thick Fire Rated Glass.(PilkingtonUK, Pyran-Germany) with Double Skin Shutter of 44 mm thick. (GI sheet On Both sides), and also including provision of fixing Panic Bar, SS D-Type OR Lever Handle with Lock, SS Push Plate, SS Flush Bolt, SS Ball Bearing Hinges, Door Closers & Anchor Fasteners with Cap etc.

Our Esteemed Clientele



Registered Office
GMP Technical Solutions Private Limited
309-316, 3rd floor, Swastik Disha Business Park,
Behind Wadhani Industrial Estate, L.B.S. Marg, Ghatkopar (W),
Mumbai - 400 086, Maharashtra, India.
Tel: 91 22 66083700 Fax: 91 22 66083737
E-mail: enquiry@gmptech.net
Website: www.gmptech.net, www.gmpartitions.com

GMP Technical Solutions
ISO 9001:2000

Noida Office
RS-1/3, Second Floor, Savitri Market,
Sector 18, Noida (U.P) 201301
Tel:- 91 120 4204770, Fax :- 91 120 4204771
E-mail: salesdelhi@gmptech.net

Bangalore Office
306, 3rd floor Santa Clara Apartment
18th Main Road, Jayanagar, 4th 'T' Block
Bangalore 560041

Goa Office
Plot No. L73, Verna Ind. Estate
Verna Salcette
Goa- 403722

Hyderabad Office
Flat no D, 1st Floor Patel Trade World
5-4-187/3 & 4/10/SF 10, Karbala Maidan
M.G. Road, Secundrabad-500003