



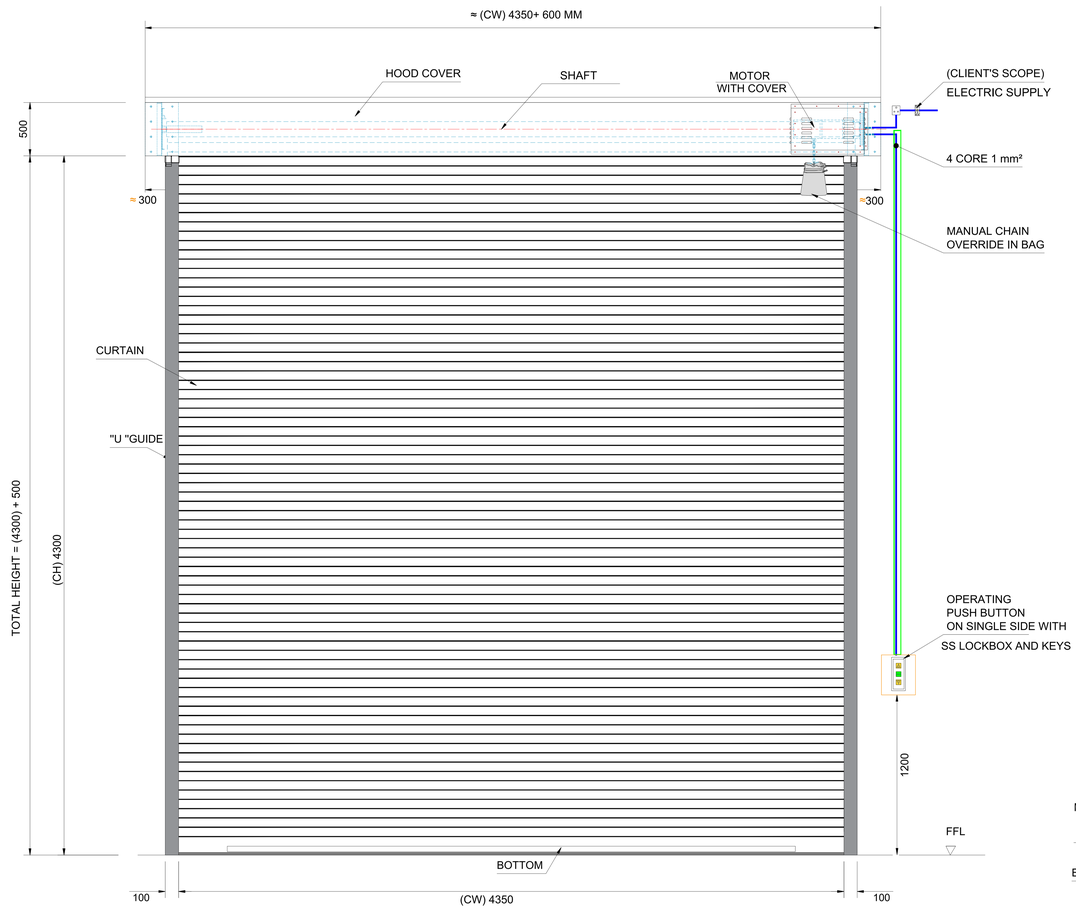

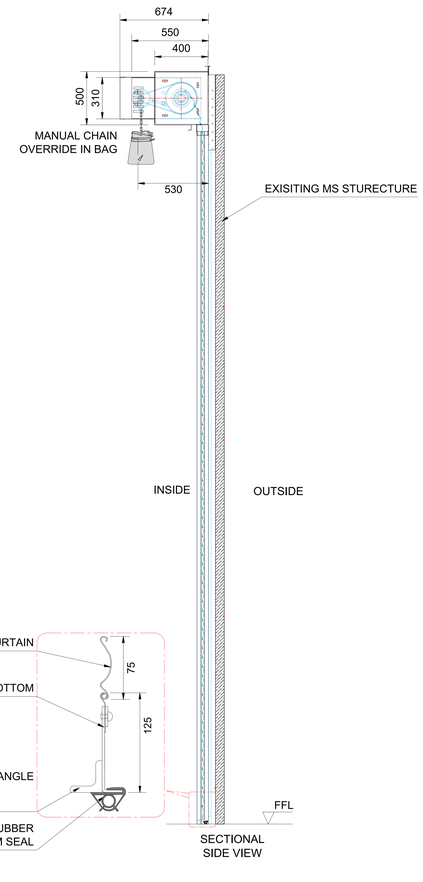

INSIDE ELEVATION

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside
3.	Mounting Surface	Side Brackets: Structure
4.	Slat	Curved 75 mm GI Sheet - 1.0 mm Thk
5.	Bottom Profile	MS Plate 125 x 2.5 mm thick with Angle Stiffner with rubber seal
6.	Guide Profile	M.S." U " Shape profile 100 x 2.5 mm Thk.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Accessories	Push Button Single side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4350 mm	4300 mm	01

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose
3. RAL code confirm by client
4. Structure in client scope

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	S.J.	05/10/2024	CLIENT - TATA MOTOR
CHECK	S.W.	05/10/2024	PROJECT - MOTORISED ROLLING SHUTTER
APPROVAL	V.T.	05/10/2024	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/00XX — REV-00
			SCALE: NTS — WT: — SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com