

HYD CYL - Ø63 (Bore) X 50(Rod)X 733 (Stroke length) (Single Acting)

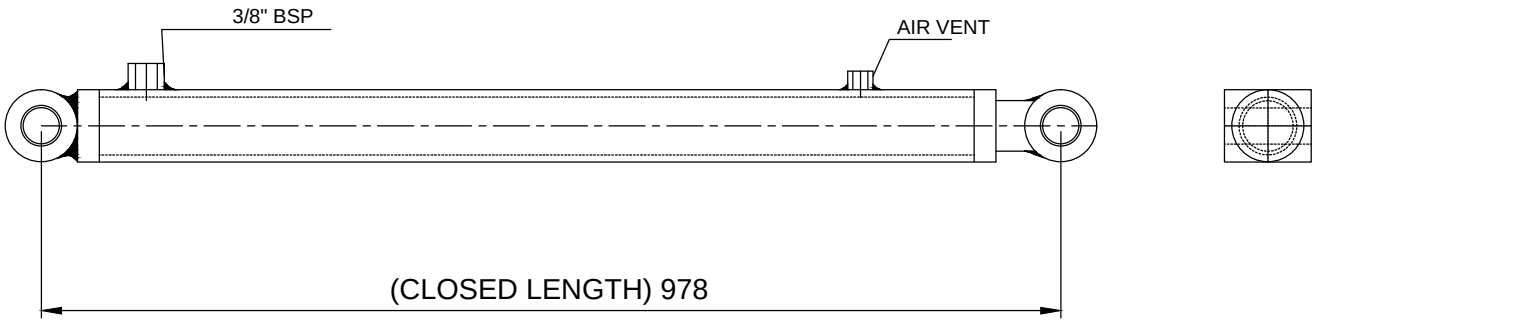

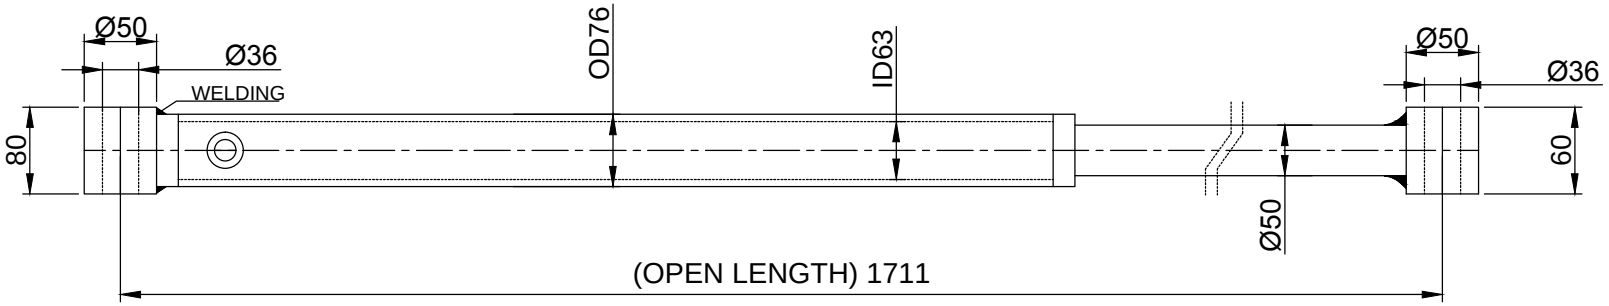

SPECIFICATION :-

- BORE :- Ø63mm
- STROKE :- 733 mm
- PISTON ROD :-Ø50mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 04 NOS

REV NO	DATE	DRAWN	DESCRIPTION
R01	04.10.2018	P.A	CYL . BORE & OD CHANGE.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE

DECK CYLINDER

	NAME	SIGN	DATE
DRAWN	PRADEEP		28.09.2018
CHECK	PRADEEP		28.09.2018
APPRD.	PRADEEP		28.09.2018

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -

PROJECT -

SITE LOCATION -

If any queries contact : design@nihva.com

DWG. NO. : NIHVA/18-19/VDR/130

REV- 01

ALL DIMENSION ARE IN mm

SCALE: NTS

WT:

SHEET: 01 OF 01