


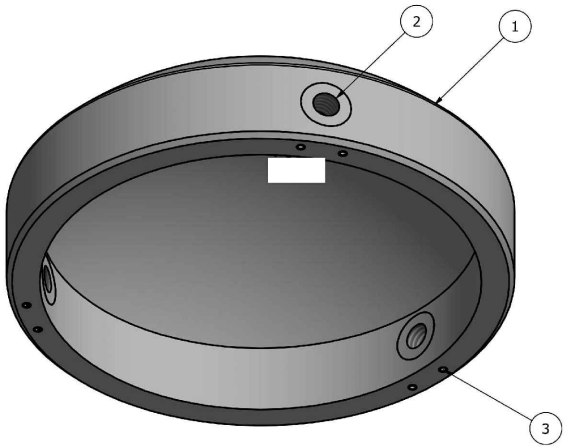


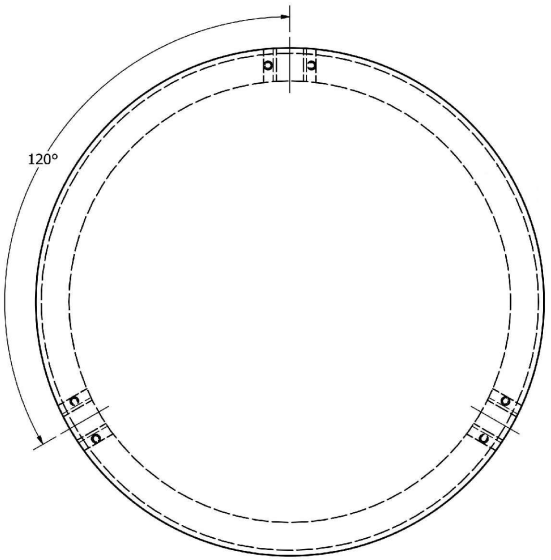

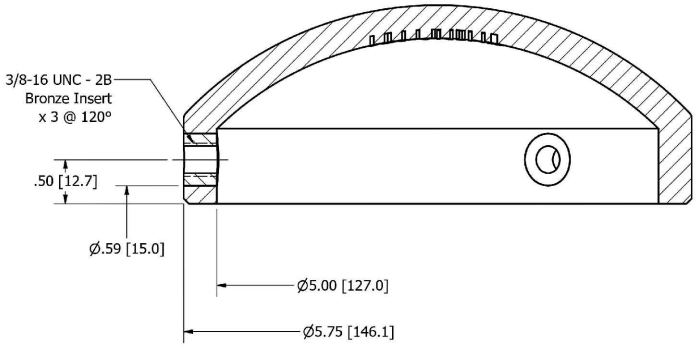

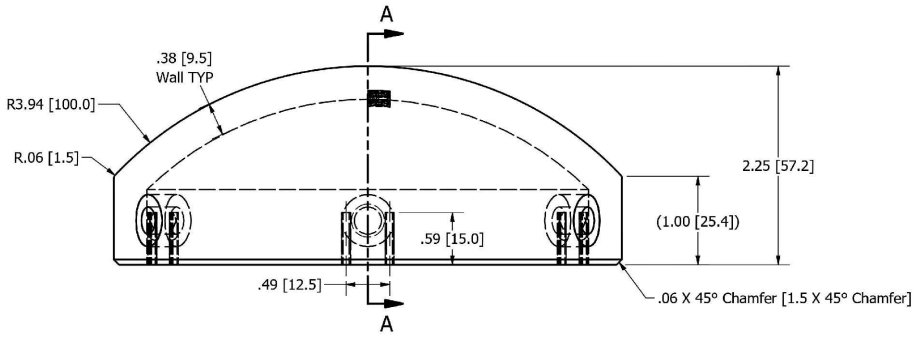

SECTION A-A

Notes:
1) Material: Cap Body Ductile Iron ASTM A536 Grade 65-45-12, with Bronze Insert and Steel Pin
2) Clean and deburr, remove all sharp edges
3) Entire exterior surface must be machined, no voids/cracks allowed
4) Max. exterior surface roughness 125 micro inches
5) Bronze insert OD 15 mm
6) Drill 2 x 2.5 mm diameter holes per bronze insert on cap end, approx. 12.5 mm apart, symmetric to center of bronze insert
7) Tap in approx. 15 mm long spring pins to lock insert in place. Spot weld pin ends to lock pins in place
8) Grind weld spot smooth
9) Bronze insert must NOT be pulled out by set screw tightened with 20 lb-ft torque

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	0238_1	Bollard Cap - Ductile Iron
2	3	0238_2	Set Screw Insert - Bronze
3	6	0238_3	Slotted Spring Pin

UNLESS OTHERWISE SPECIFIED: DIMEMSIONS ARE IN INCHES	DESIGN	7/16/14
TOLERANCES: ANGULAR: MACH ± 0.5° BEND ±1° THREE PLACES DECIMAL: ± 0.010 TWO PLACES DECIMAL: ± 0.050 ONE PLACE DECIMAL: ± 0.100	ENGINEER	5/30/18
	VERIFY	5/30/18
	APPROVED	5/30/18

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

TITLE

Bollard Cap R-7501-C6

SIZE		DWG NO	REV
C		0238	B7

SHEET 1 OF 1