

HYD CYL - Ø50 (Bore) X 25(Rod)X 140 (Stroke length) (Single Acting)

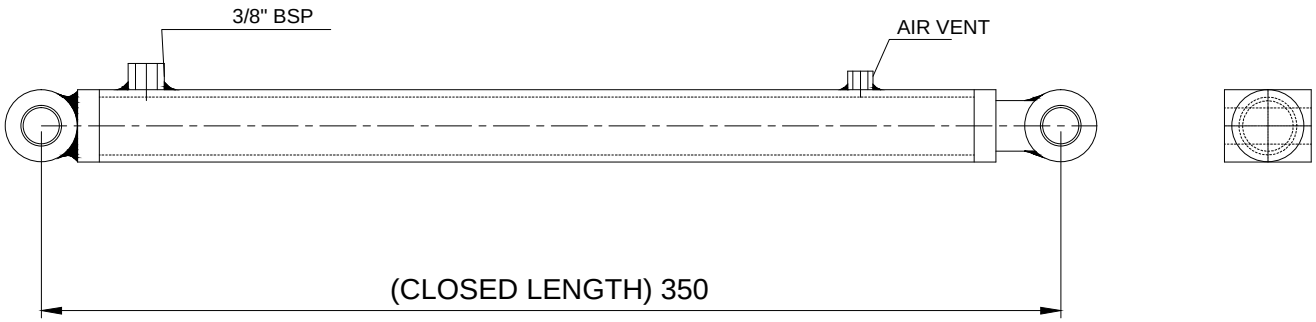

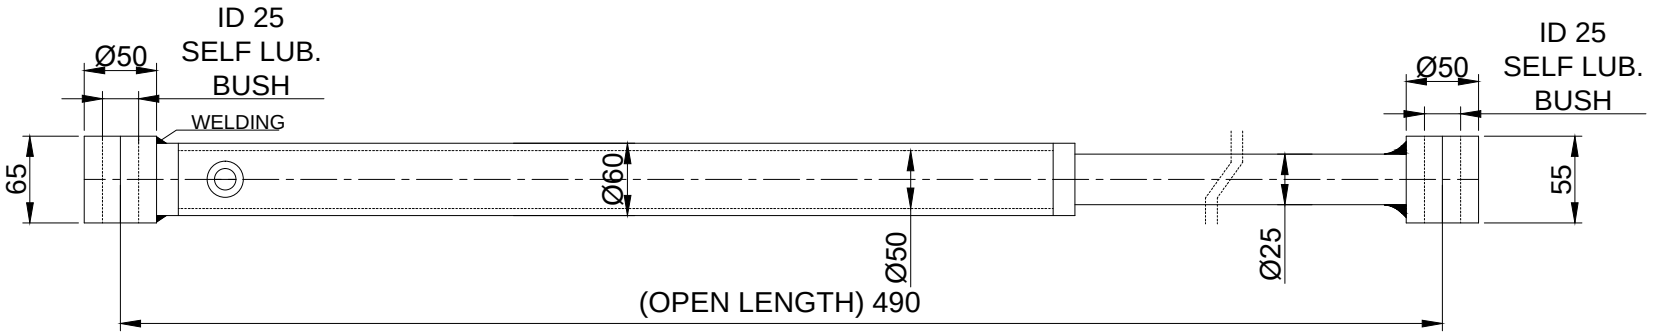

SPECIFICATION :-

- BORE :- Ø50mm
- STROKE :- 140 mm
- PISTON ROD :-Ø25mm
- MOUNTING :-BOTH END CLEVIS
- MEDIUM :-HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :-3/8" BSP
- WORKING PRESSURE :- 160 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- MAX RECIPROCATING SPEED :-12m/min
- STROKE TOLERANCE :-0 TO +1mm
- CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

QUANTITY- 7 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: LIP CYLINDER			NIHVA TECHNOLOGIES PVT. LTD.
	NAME	SIGN	DATE
DRAWN	PRADEEP		02.05.2018
CHECK	PRADEEP		02.05.2018
APPRD.	PRADEEP		02.05.2018
If any queries contact : design@nihva.com			DWG. NO. :NIHVA/18-19/VDR/014 REV- 0
ALL DIMENSION ARE IN mm			SCALE: NTS WT: SHEET: 01 OF 01

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
SITE LOCATION -