

# Manipulator -50 kg lifting Capacity


DATE-24/04/2017

CUSTOMER SCOPE
UTILITY REQUIREMENT
AIR PRESSURE 6 BAR MIN (AIR FLOW300 LPM)

FOUNDATION REQUIREMENT
CONCRETE FLOOR RECOMMENDED FOR MANIPULATOR
FOUNDATION IS 21N/MM2 OF COMPRESSIVE FORCE

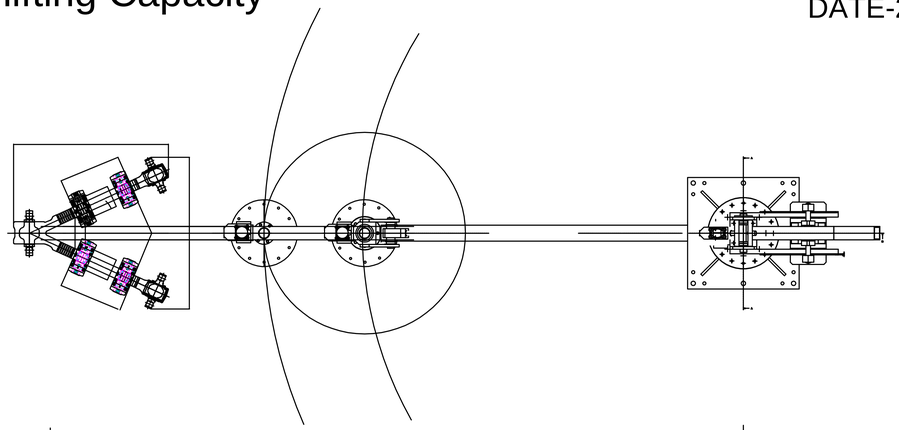

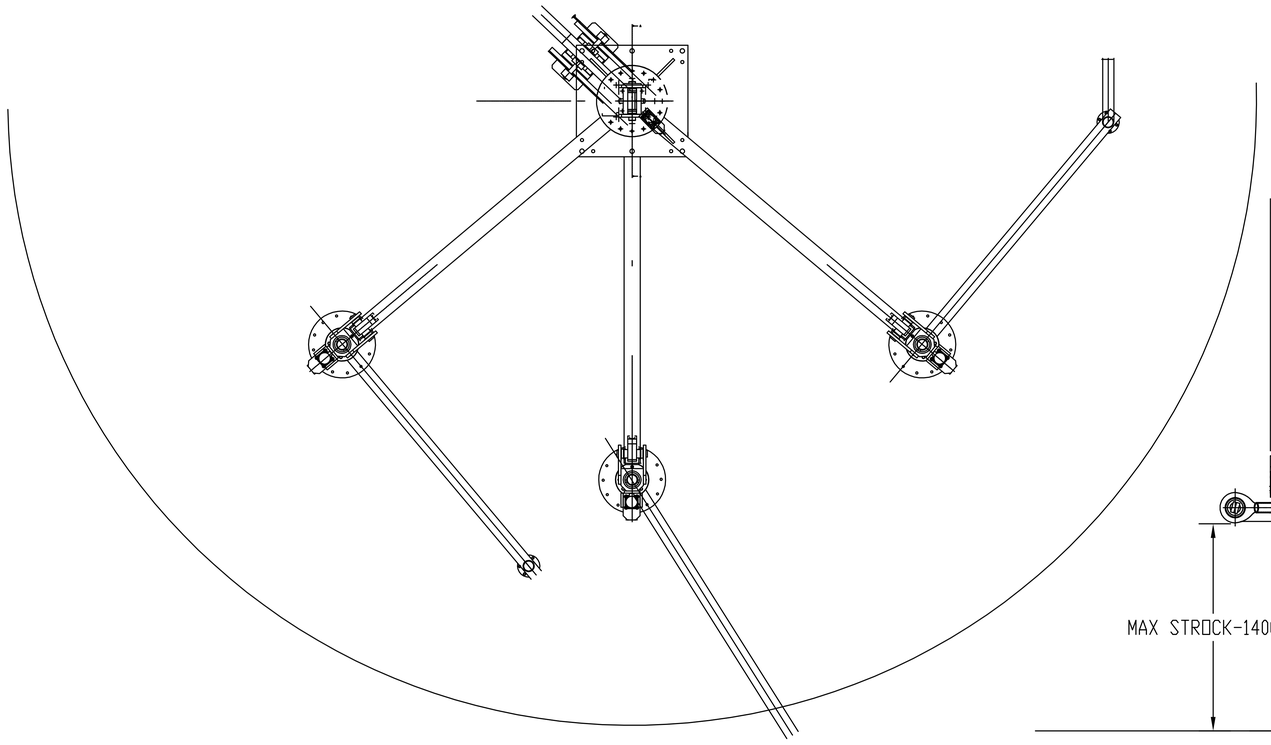

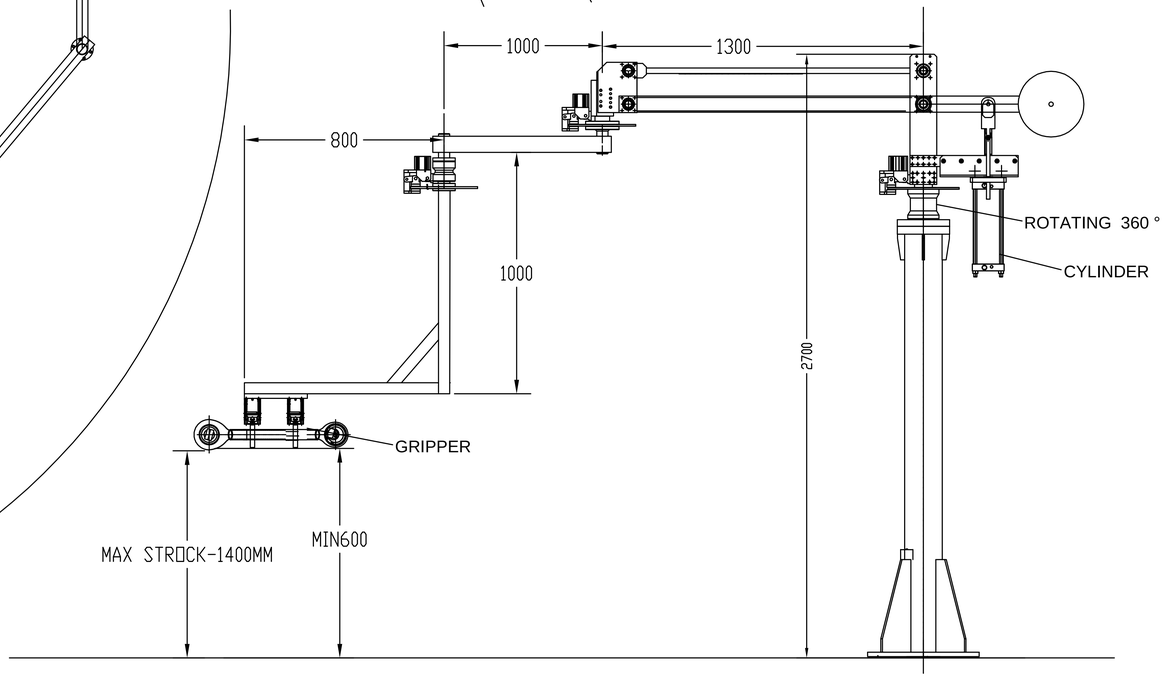


NOTE
1) THE LAYOUT IS DRAWN ON THE BASIS OF EXISTING AVAILABLE SPACE
2) CUSTOMER WILL HAVE TO MODIFIED SOME OF THERE EXISTING SCHEMES IF REQUIRED SO AS TO MAKE IT SUITABLE FOR THE MANIPULATOR APPLICATION

3) CUSTOMER SHOULD REMOVE ALL OBSTRUCT STRUCTURE AT MANIPULATOR WORKING AREA

SPECIFICATION OF MANIPULATOR
1. MAX LIFT OF MANIPULATOR -1400 MM
2 MAIN ARM OF MANIPULATOR -1300 MM
3 EXT BOOM OF MANIPULATOR -1200MM
4 MAX REACH OF MANIPULATOR -3000MM
5 LIFTING CAPACITY AT 6 BAR -50KG W/O GRIPPER
6 CONTROL ZERO GRAVITY BY MANUAL CONTROL
7 COLOR LEMON YELLOW