
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT


SPECIFICATIONS :–

H – Overall Height of Door Frame.
W – Overall Width of Door Frame.
C – Clear Width opening
T – Nominal Shutter Thickness = 43mm.
D – Depth of Door Frame (100mm approx).


NOTES :–

1) Door Frames shall be fabricated from 1.2MMThk. GI (IS 277) sheets to form a single rebate profile & fixed to wall with Anchor Bolts.
2) Shutter Panels shall be fabricated from 1.2mmThk. GI (IS 277) sheets having Tray & Cover construction to provide a nominal thickness of 43mm. Shutter flatness may vary till 5mm depending upon the door size & Shutter shall have infill material with reinforcements at top, bottom edges & for hardware fitments.
3) 4nos. SS 4" Ball Bearing Hinges shall be provided on one Shutter as shown.
4) DORMA PHCR 1000 Single Point Panic bar
5) Outside Trim 2905
6) Door Closer

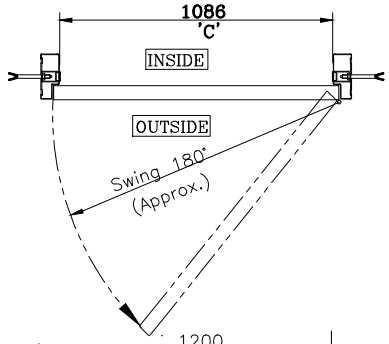


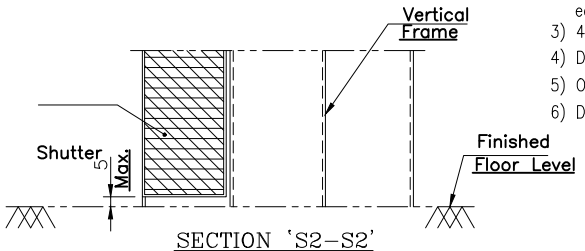

SECTION 'S2–S2'

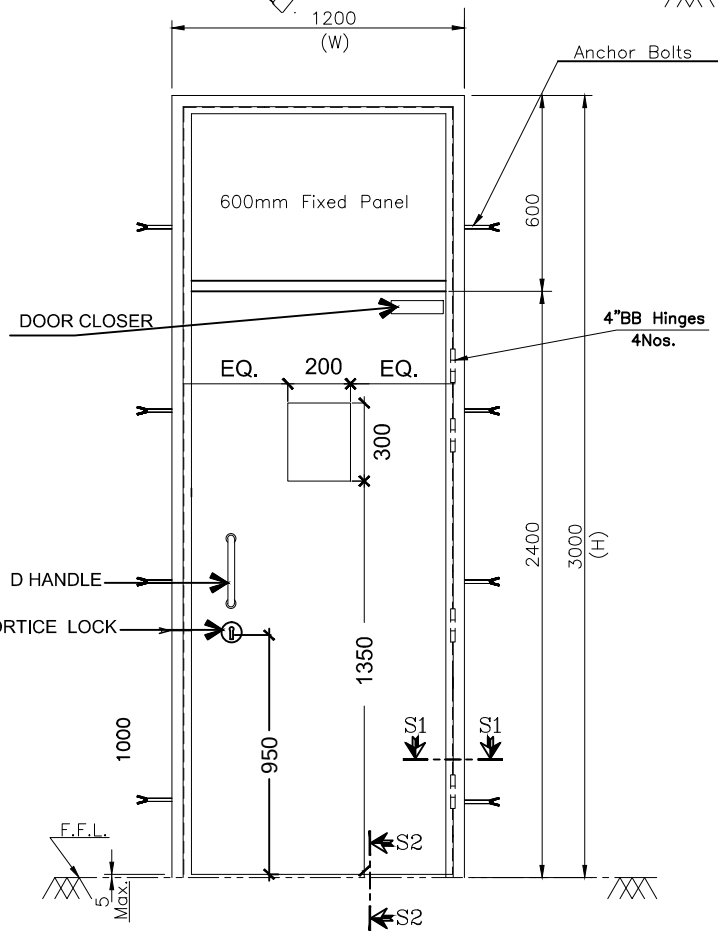

SINGLE LEAF DOOR

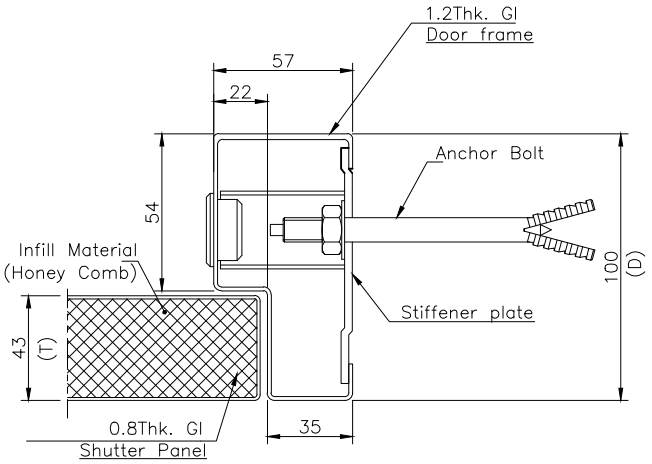

SINGLE REBATE FRAME

QUANTITY:2Nos.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern

TITLE

FIRE DOOR

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:– info@nihva.com
Website:– www.nihva.com

	SIGN	DATE	
DRAWN	ABHIJIT	20/10/15	CLIENT - MUKUND CONSTRUCTION
CHECK	ANIL	20/10/15	PROJECT- NEUMAN AND ESSER
ENG			SITE - BHOSARI MIDC
APPRD.			DWG. NO. - NIHVA/15-16/150
MFG			SCALE: 01 | WT: | SHEET: 01
Ref. No.			If any queries contact : projects@nihva.com

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT