


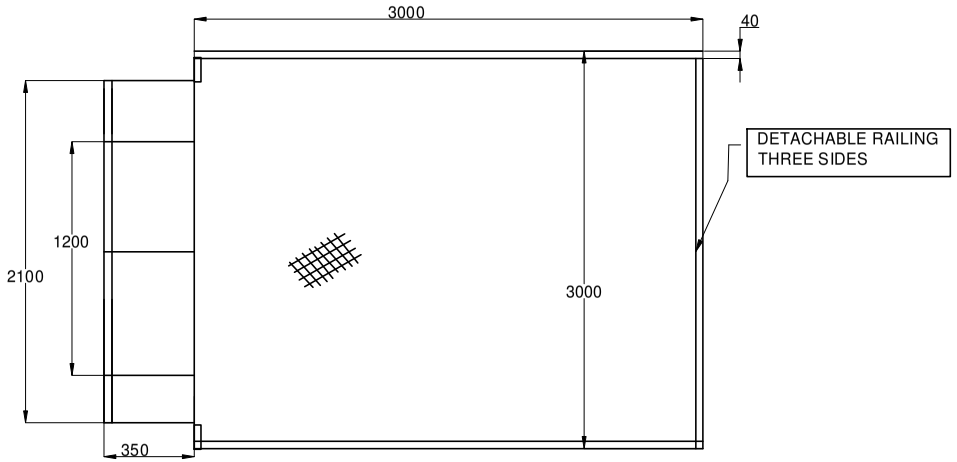


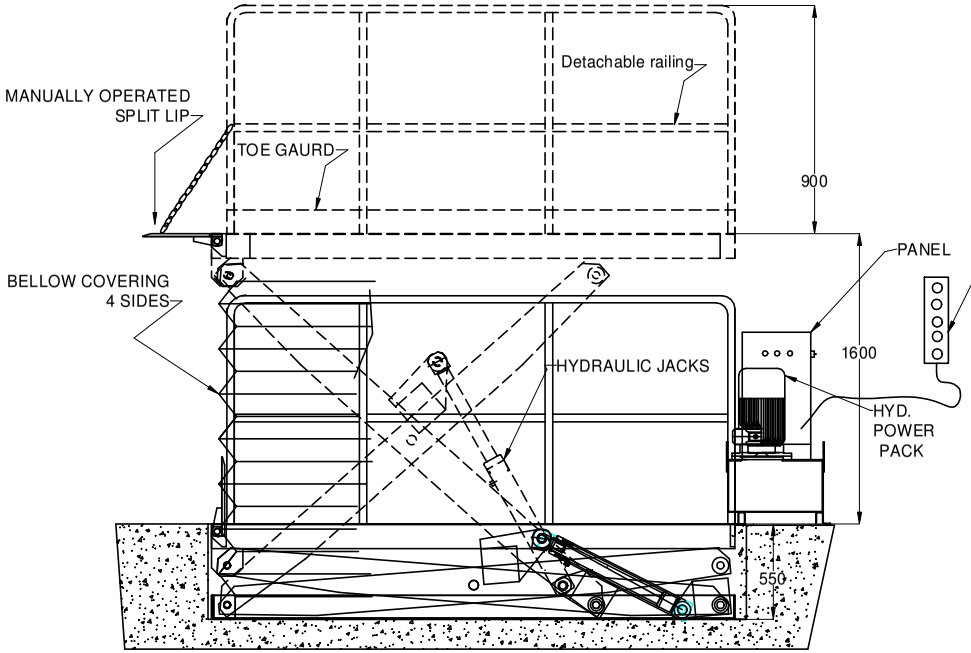

NOTE :
1. PIT FOR SCISSOR LIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR HOSES, PANEL , AND CABLES RELATED CIVIL WORK IS IN CLIENTS SCOPE ALSO PROPER DRAINAGE SYSTEM SHOULD BE PROVIDED FOR THE PIT.

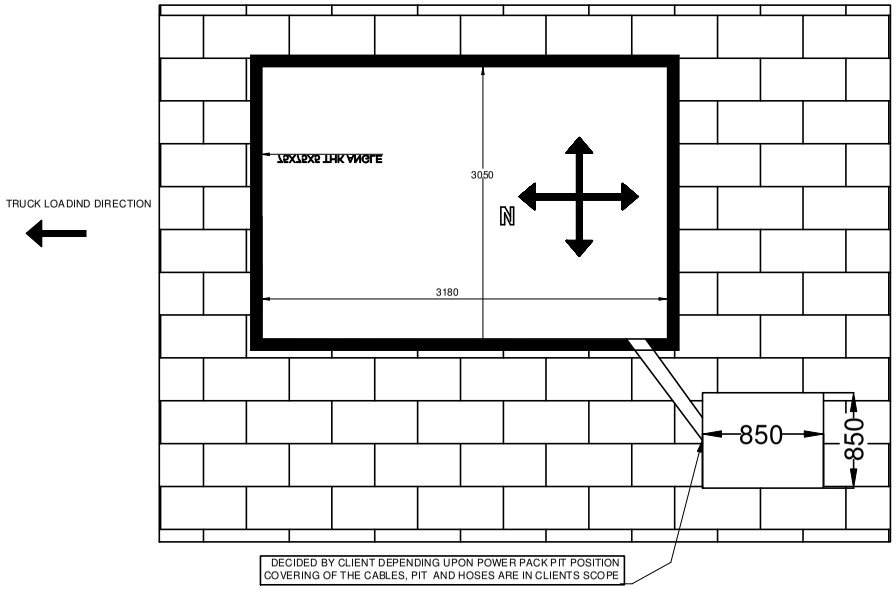

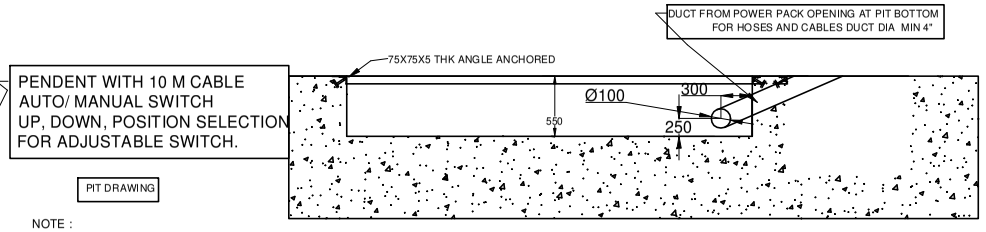

NOTE :
1. PIT FOR SCISSORLIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR HOSES AND CABLES AND RELATED CIVIL WORK IS IN CLIENTS SCOPE
5. WATER DRAINAGE AND PIT CLEANING NEEDS TO BE CONSIDERED AND DONE BY CLIENT

Specifications

	Equipment			Scissors Lift
Dimensions	Rated Capacity		W Kgs	3000
	Platform	Length	mm	3000
		Width	mm	3000
	Overall	Length	mm	3150
		Width	mm	3000
	Lip One side		mm	350 x 2100
	Lip Operation			Manual
	Lip Type			Single
	Bellow Covering		mm	Optional
	Heights	Closed	mm	550
		Lift	mm	1600
Drive	Lift Motor 3 Ph AC		H.P.	5
	Pendent			1 Nos
	Lift & Lower cut-off - Yes			
	Station ajustable switch - Yes			
	Colour - 1004			

EQUIPMENT - SCISSORS TABLE