SUNROOM
DESIGN PROPOSAL

CONTENTS

01 SITUATION ON SITE


02 PRODUCT EFFECT


03 DESIGN PROPOSAL


04 PRODUCT ACCESSORIES

05 CASE STUDIES

01 SITUATION ON SITE

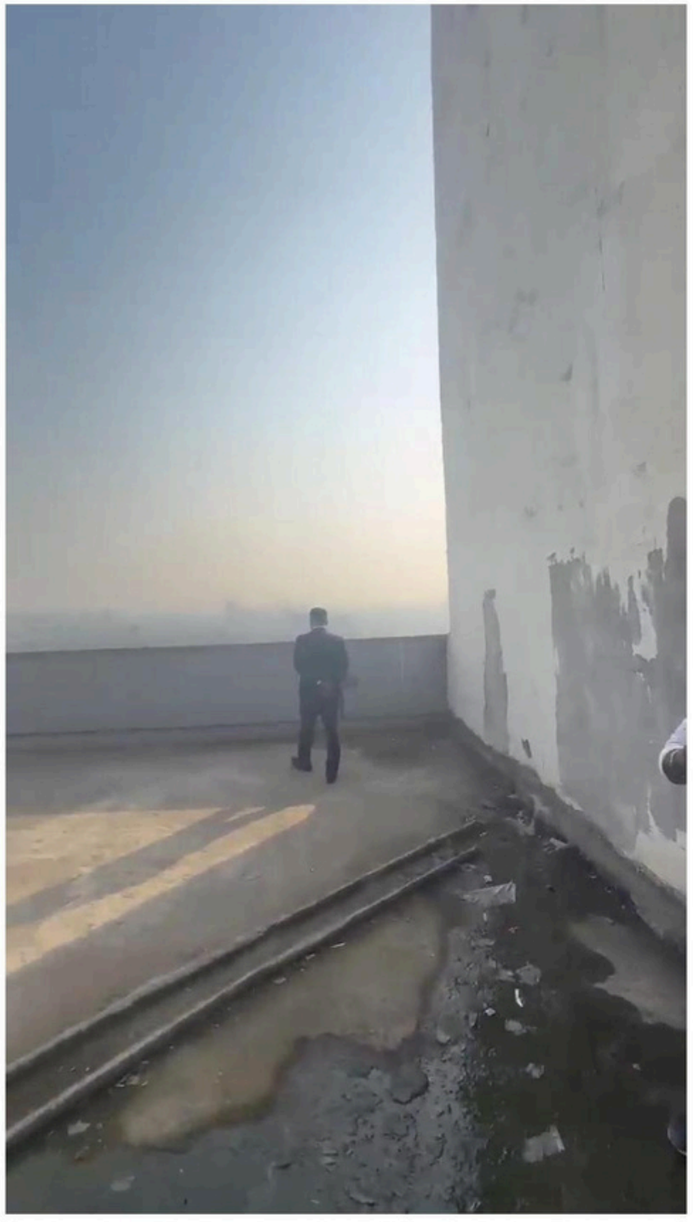

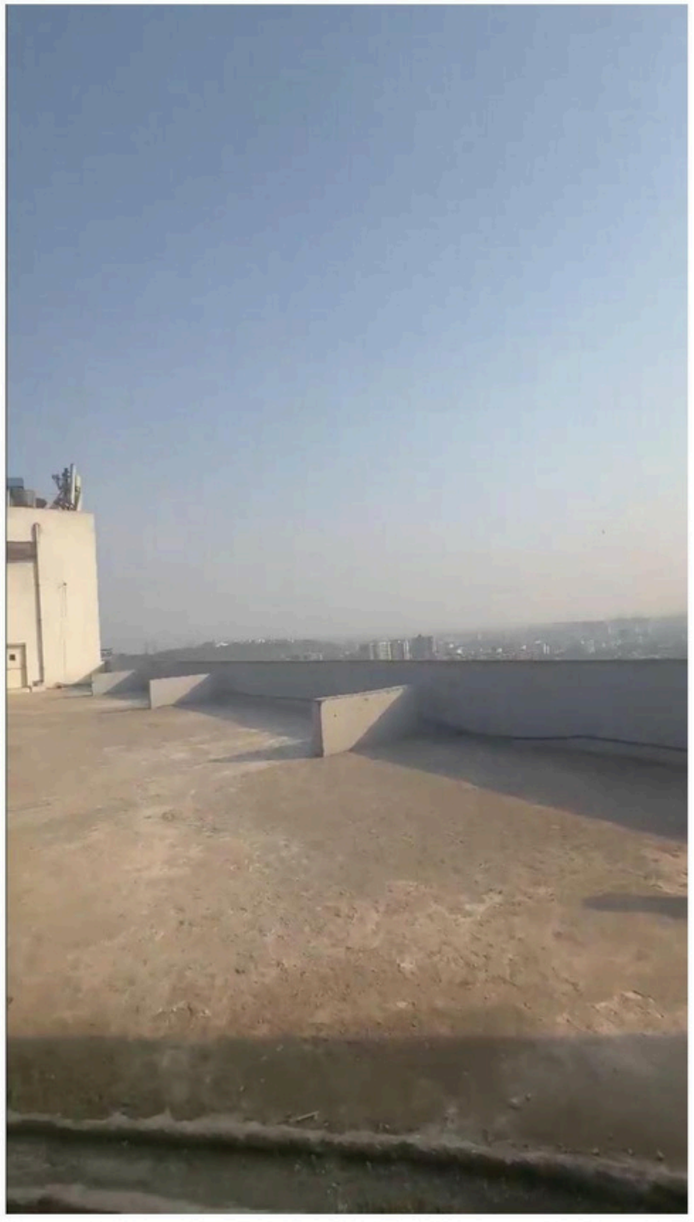

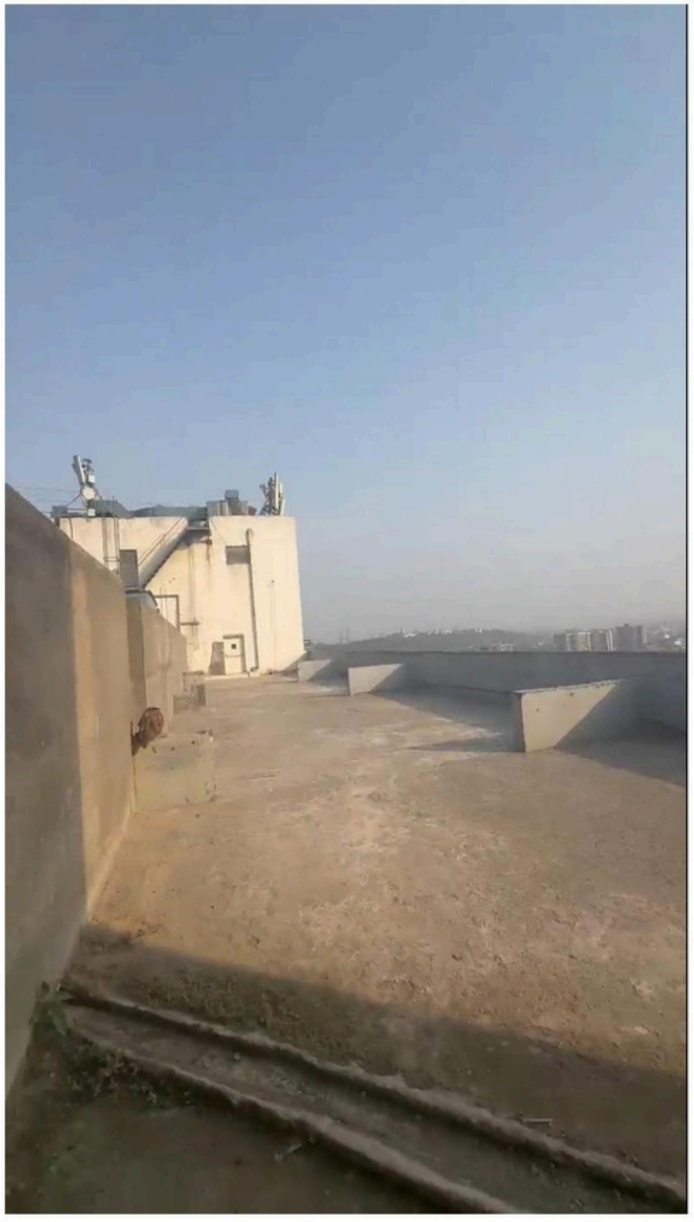

02 PRODUCT EFFECT











SAVIYAA IMPEX




03 DESIGN PROPOSAL

DIMENSION DRAWING

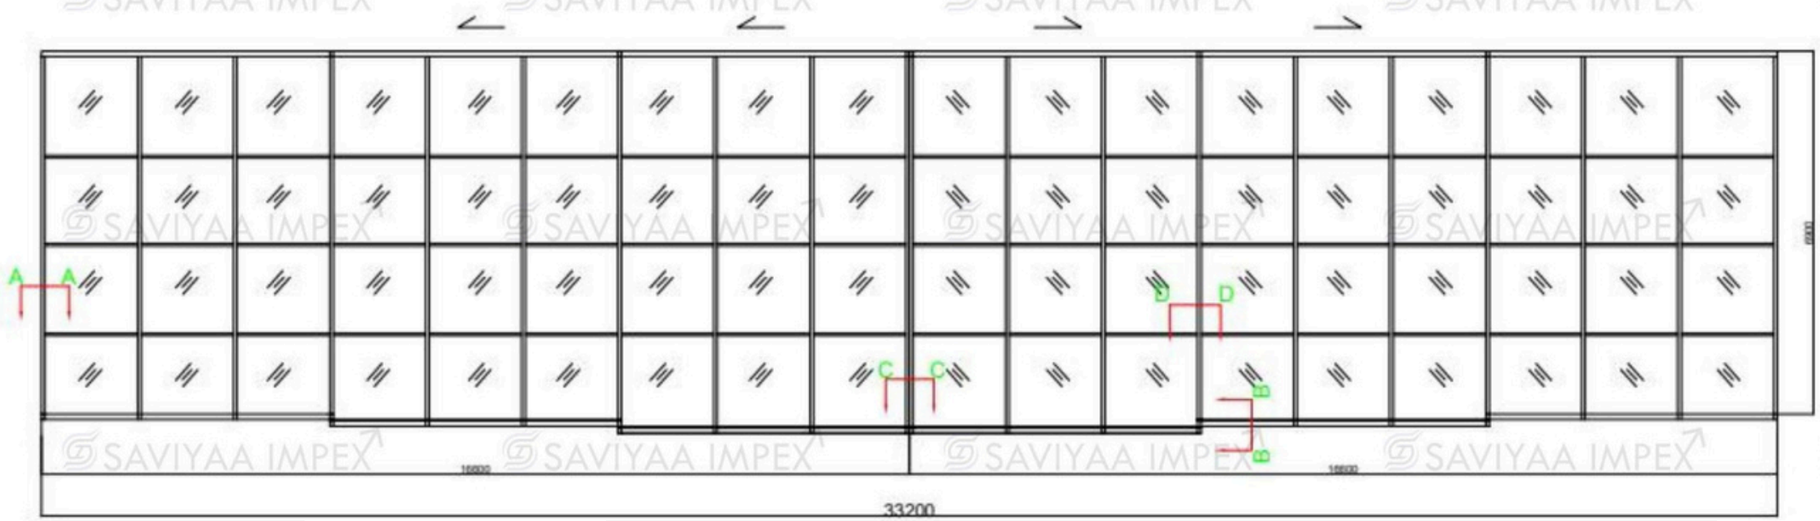


(top view)

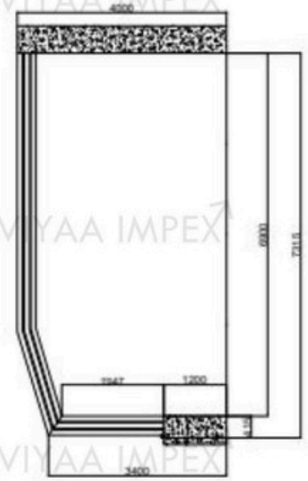


(side view)

cloture

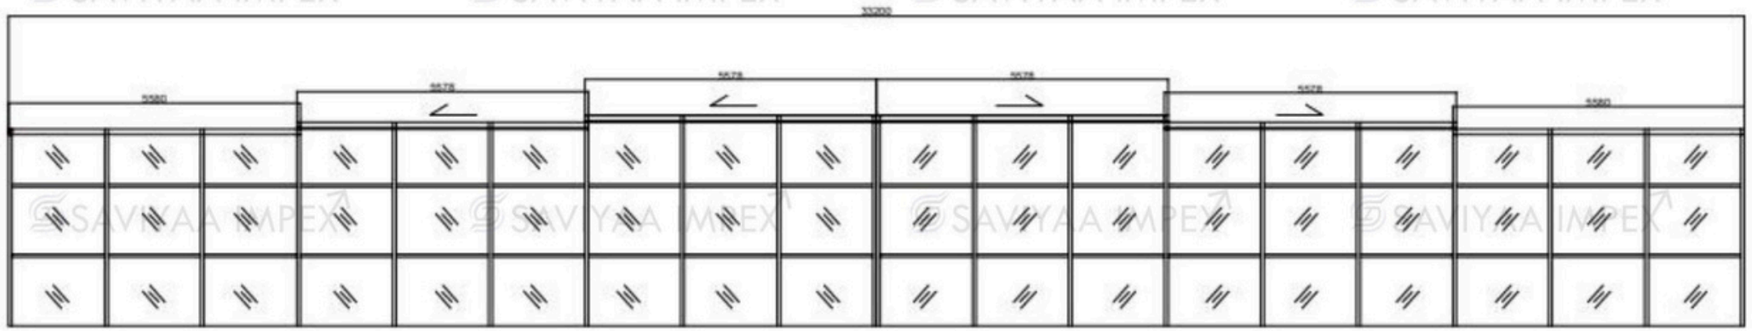


(front view)

DIMENSION DRAWING

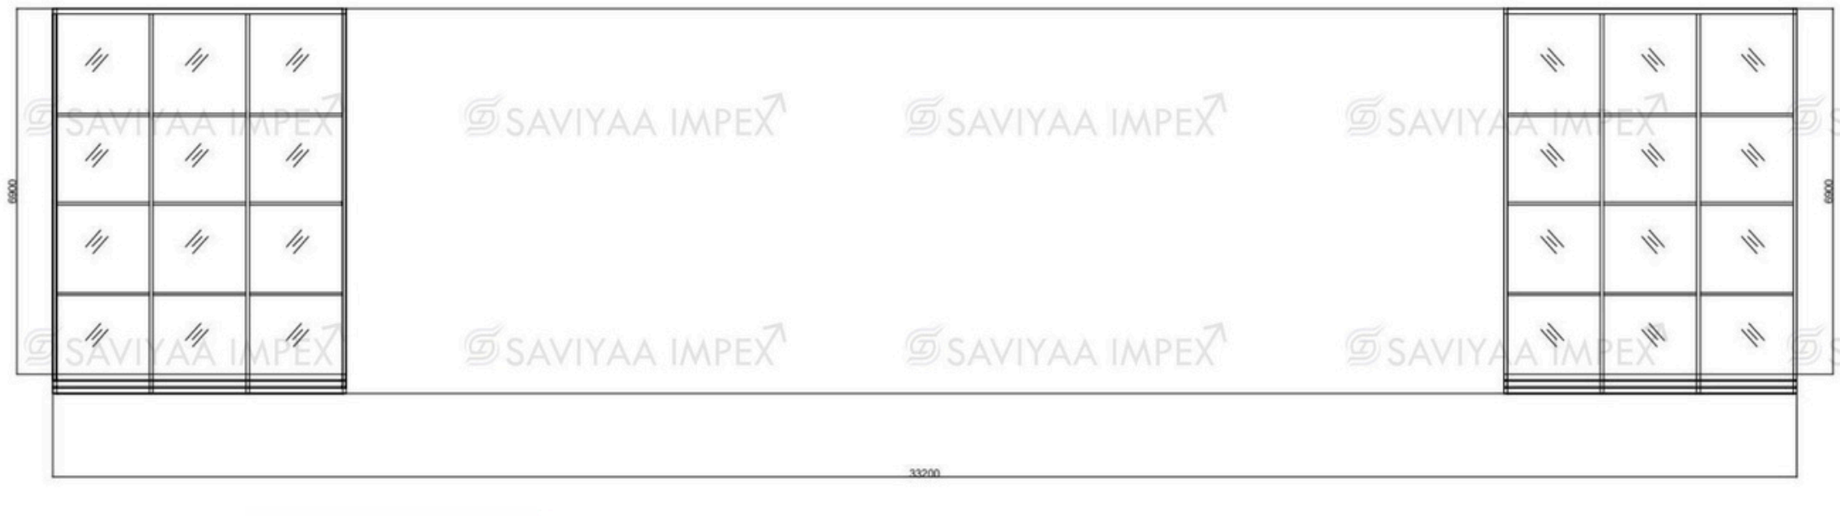

(top view)

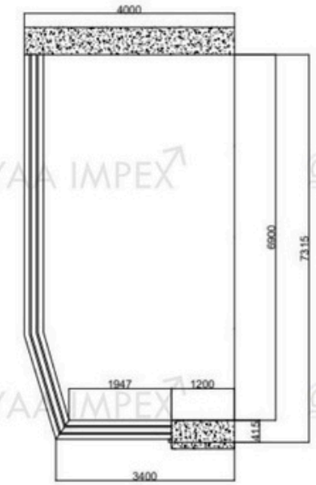


(side view)


opens




(front view)

DIMENSION DRAWING

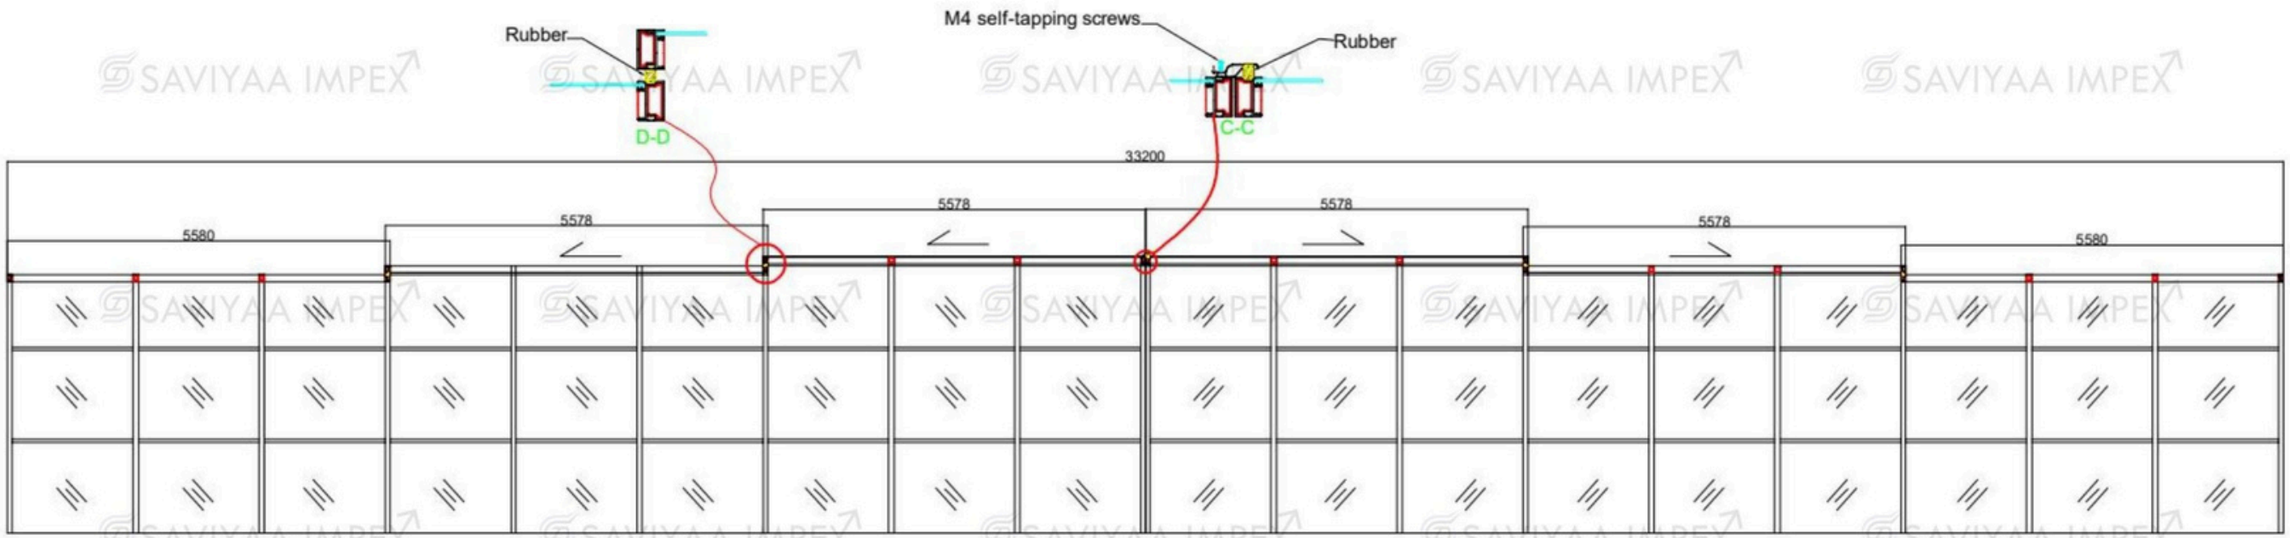


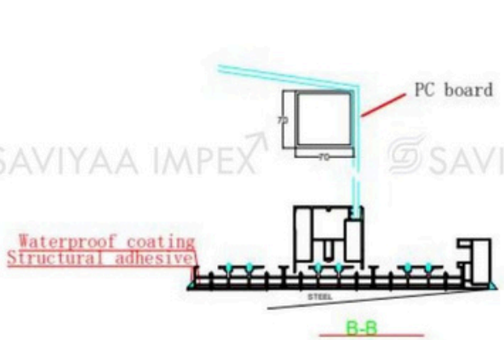




04 PRODUCT ACCESSORIES

Main beam	6063-T5 Aluminum
	

Secondary beam	6063-T5 Aluminum
	

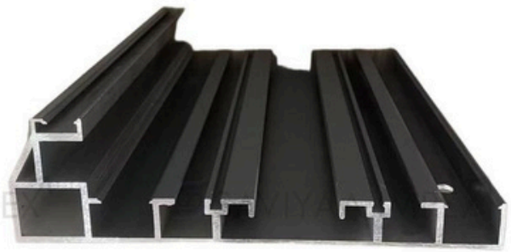Tracks


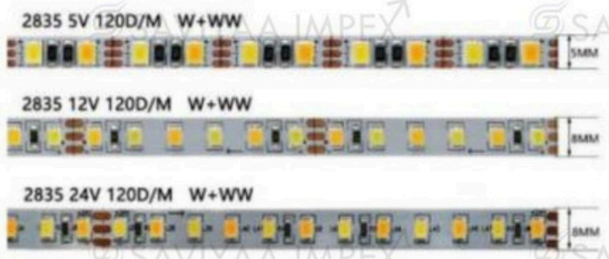
Slide	304 stainless steel
	

SAVIYAA IMPEX

ACCESSORIES

Motor	Specification	104 type 200W
	Rated voltage (V)	24V
	Rated Power (W)	40/60
	No-load speed (rpm)	126
	Rated torque/torque (N.m)	2.77/4.15
	Reduction ratio	30

Transformers	INPUT	200-240VAC10A
	HZ	50/60
	OUTPUT	+24V 42A
		600-1400W

Light strip	Colour temperature	White Neutral Warm
	1m/14W 	

Tank chain	Material	Nylon
	V	≤5m/s
	A	≤15m/s²
	Temp	-30℃~+130℃

ACCESSORIES

Light Strip Controller




Pool Cover Controller




Cords



Gears	45# steel

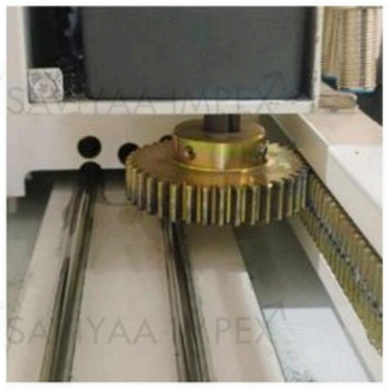

Rack	45# steel




Light-sensitive limiters



Roller


Fastener	304 stainless steel
	

Glass glue

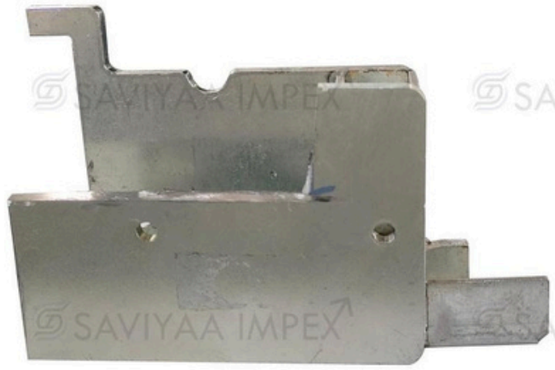
Snap


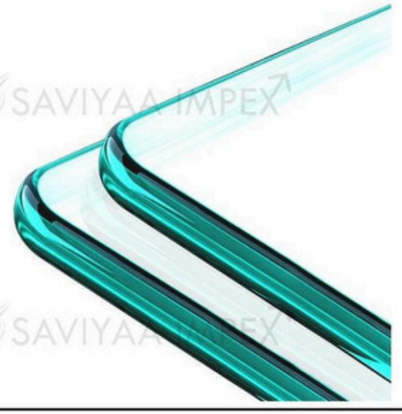
Corner code


Connection



Water stopper tape	Hot air aging 70°C*72H	
	Hardness change rate (+Shore A)	+10A
	Rate of change of tensile strength (%)	≤30%
	Rate of change of tensile extension (%)	≤40%

Hole cap	synthetic resin
	

覆盖物 (Overlay)





Glass


pc refractory sheet	6.0mm
	

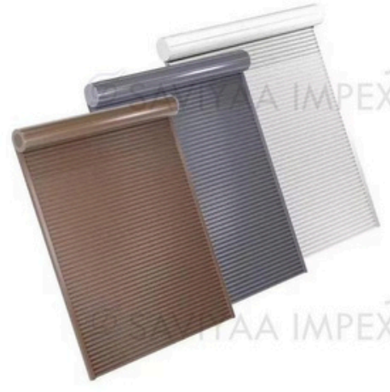Motorized Sunshade


05 CASE STUDIES

CASE STUDIES

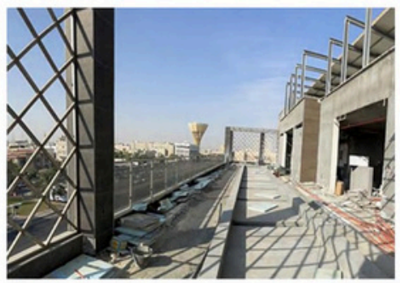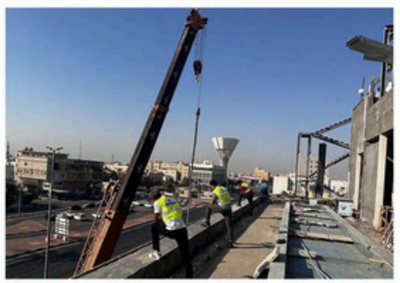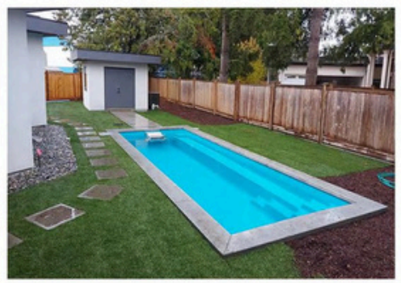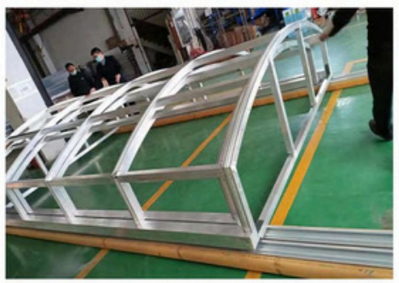


















CASE STUDIES







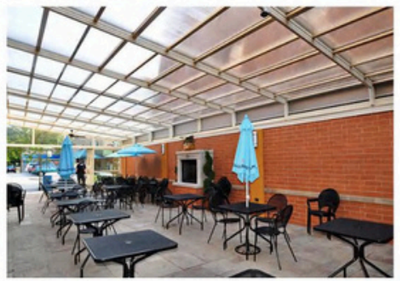











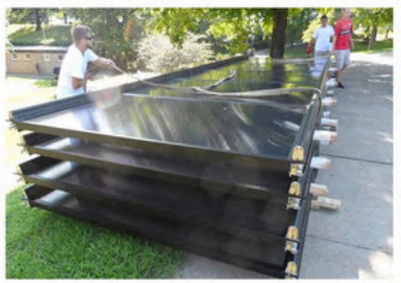


CASE STUDIES

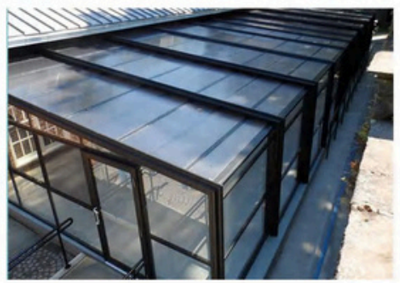















