
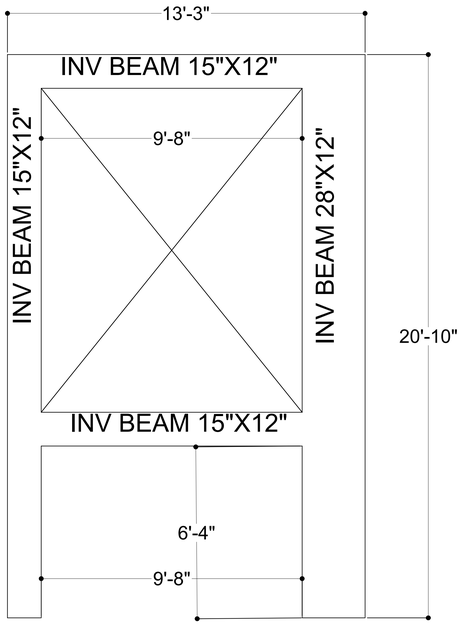



RC SHUTTERING DETAILS AT COURTYARD




MS RHS 50X25X3.2

TOUGHENED GLASS ABOVE


DUCT DETAIL

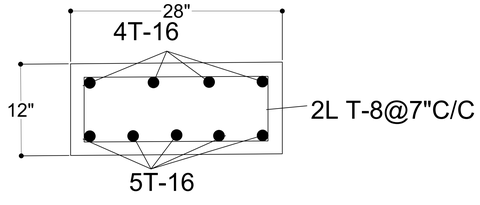

INV BEAM 28"X12"

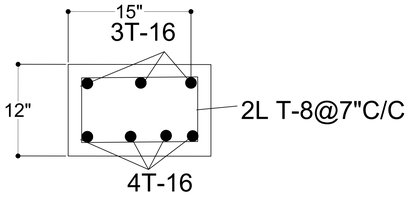

INV BEAM 15"X12"

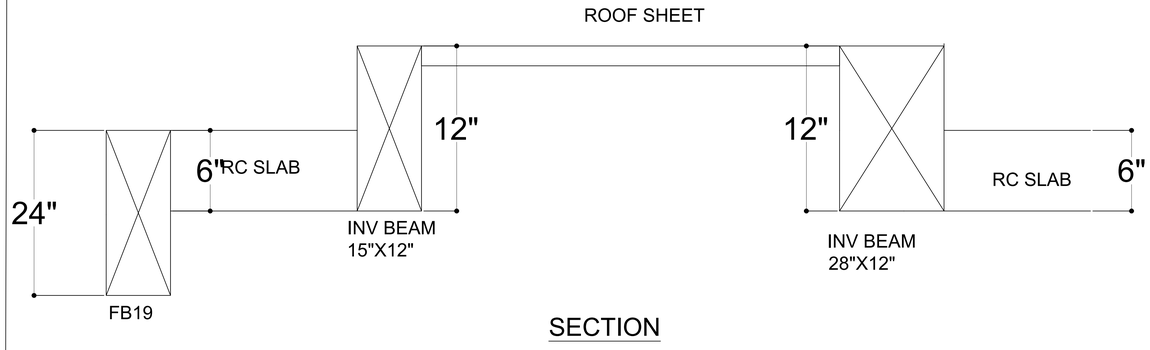

SECTION

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN FEETS AND INCHES.
2. DO NOT SCALE THE DRAWING. FOLLOW FIGURED DIMENSIONS.
3. READ THIS DRAWING ALONG WITH RELEVANT ARCHITECTURAL DRG. DISCREPANCY IF ANY SHOULD BE BROUGHT TO THE NOTICE OF THE ARCHITECT/ENGINEER.
4. GRADE OF CONCRETE FOR R.C.C WORKS SHALL BE M25
5. ALL REINFORCEMENT SHALL BE HYSD BARS OF GRADE Fe500
6. CLEAR COVER FOR MAIN REINFORCEMENT IN FOOTING-2" COLUMN-1.5", BEAM-1", SLAB-0.75".
7. LAPS IN MAIN REINFORCEMENT IS 50 TIMES DIA OF THE SMALLER BAR.
8. SBC IS ASSUMED AS 200 kN/Sqm.
9. THE BUILDING IS DESIGNED FOR GF+UPPER 4 FLOORS
10. DEPTH OF FOUNDATION SHOULD NOT BE LESS THAN 6'0". BELOW BASEMENT OR UNTIL THE HARD STRATA IS ACHIEVED PRIOR TO PCC 4" THICK SAND BOULDER FILLING

CONCRETE GRADE	STEEL GRADE	LAP LENGTH	
		TENSION	COMPERSION
M-25	Fe 500	50D	38D

SL	DESCRIPTION	DATE
01	GFC	15/11/2023

PROJECT CONSULTANT:
ARCHI MAGIC
NEW TOWN
YELHANKA
BANGALORE - 560 004.

SIGNATURE OF ARCHITECT:

STRUCTURAL DESIGN BY:
VINDHYA

SIGNATURE OF STRUCTURAL ENGINEER:

CLIENT :
JITHENDRA

SIGNATURE OF CLIENT:

PROJECT
CONSTRUCTION OF RESIDENTIAL BUILDING

DRAWING TITLE:
DETAILS OF CUTOUT AREA

SIZE:	SCLAE:	DRG NO:	DATE:	SHEET NO:	REV:
A3	N.T.S	AR/RE/SBR/421	15/11/2023	17	R-01