SIEMENS



Data sheet: Squirrel cage induction motor (Line operation)

Ordering data: 1LE7501-0DB32-3FA4

Motor type: 7CV2 803B **Frame size:** 80M **Construction:** IMB5 **Efficiency class** *IE2*

Client order no.
Order no.
Offer no.

Item no.
Consignment no.
Project

Standard Documentation

Unique Identification Code (Match this on all documents to form a set): 751_803-4_23_8778052_1-43

Rated data (Subject to tolerance as per IS:12615 / IEC 60034-1)

Phases	Voltage	Conn.	Freq.	Output	Rated Current	Rated Speed	Rated Torque		Nominal Efficiency % on sinusoidal supply			Power Factor			at % rated voltage	Locked rotor current	Locked rotor torque	Breakdown torque
	V		Hz	kW	A	rev/min			at FL	at ¾FL	at ½FL	at FL	at ¾FL	at ½FL		as multiples of rated		
																current	torque	torque
																I_A/I_N	M_A/M_N	M_K/M_N
3	415	Y	50	0.75	1.7	1433	0.51	kgf.m	79.9	79.9	77.2	0.75	0.66	0.52	100%	5.8	2.8	2.8
							5	Nm							80%	4.3	1.6	1.7

Mechanical data

Sound pressure level	60 dB(A)
Direction of rotation	Bi-directional (Standard)
Frame material	Cast Iron
Duty Type	S1
Insulation	F utilised to B
Vibration severity	A
Coating (Paint finish)	Standard Finish (Acrylic Paint)
Colour (Paint shade)	RAL 7030 - Stone Grey
Anti-condensation heaters	- / -
Motor protection	(A) - No protection (Standard)
Method of cooling	IC411
Degree of protection	IP55 (Standard)

Terminal box data

Terminal box position	TOP as viewed from DE
Material of terminal box	Cast iron
Type of terminal box	TB1L01
No. of terminals	6
Terminal thread	M6
Max. cross-sectional area	25 mm²
Cable diameter from… to…	27-35 mm
Cable entry	2xM50x1.5

Locked rotor data

Locked rotor withstand time	HOT	13s
with 50Hz, 415VY at terminals	COLD	17s

Bearings and lubrication

Bearing DE / NDE	6204 2ZC3 / 6204 2ZC3
Bearing Lifetime (L10)	50,000 hours
(for direct flexible coupling, w/o any axial load)	
Lubricant	UNIREX N3
Regreasing device	Greased for life bearings
Lubrication interval	-
Lubrication quantity	- / -
Type of bearing	

Weights and inertias

Motor weight (approx)	19 kg
Rotor weight (approx)	3.388 kg
Rotor Inertia / Rotor GD²	0.0021 kgm² / 0.0084 kgf.m²

Supply and Environmental conditions

Ambient temperature	50°C
Altitude above mean sea level	1000 m
Voltage variation	±10%
Frequency variation	±5%
Combined Voltage & Freq. variation	10%

SIEMENS

Characteristic Curves


Unique Identification Code (Match this on all documents to form a set): 751_803-4_23_8778052_1-43


Ordering data:	1LE7501-0DB32-3FA4		Voltage : 415VY	Rated Speed :	1433 rev/min
Output :	0.75	kW	Frequency : 50Hz	Rated Torque :	0.51 kgf.m / 5 Nm
				Rated Current:	1.7A

% Load	Full Load (FL)	¾FL	½FL
Efficiency	79.9%	79.9%	77.2%
Power Factor	0.75	0.66	0.52


Locked Rtr Curr	5.8 x Rated
LRWT HOT	13s
LRWT COLD	17s


DATA SUBJECT TO TOLERANCE AS PER IS:12615 / IEC 60034-1.

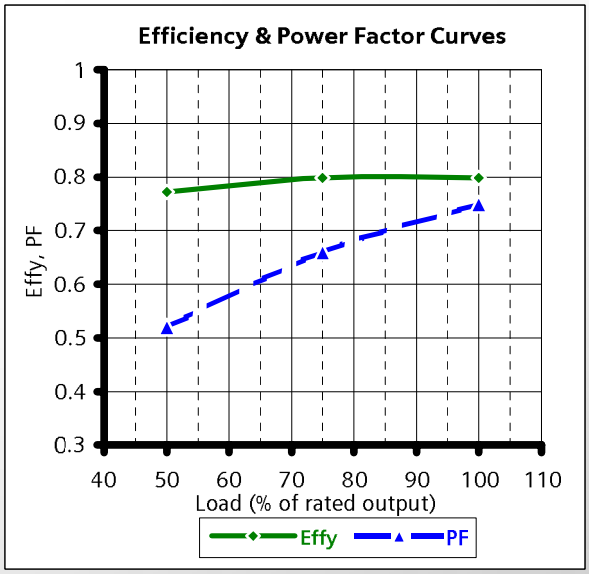

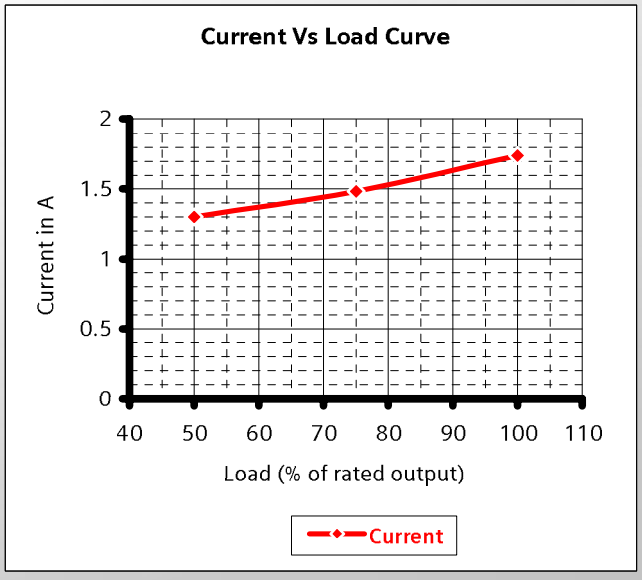


Values other than those at Full Load (FL), ¾FL and ½FL are only indicative. Do not extrapolate to No-load.

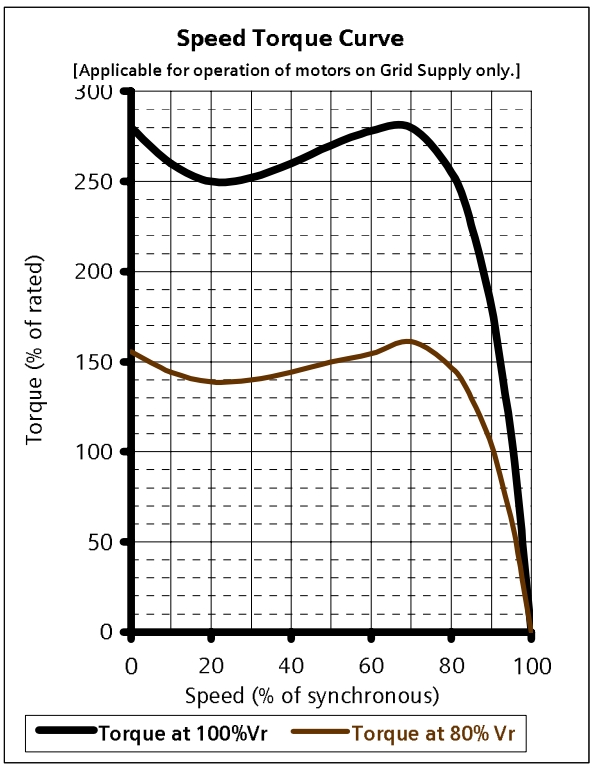


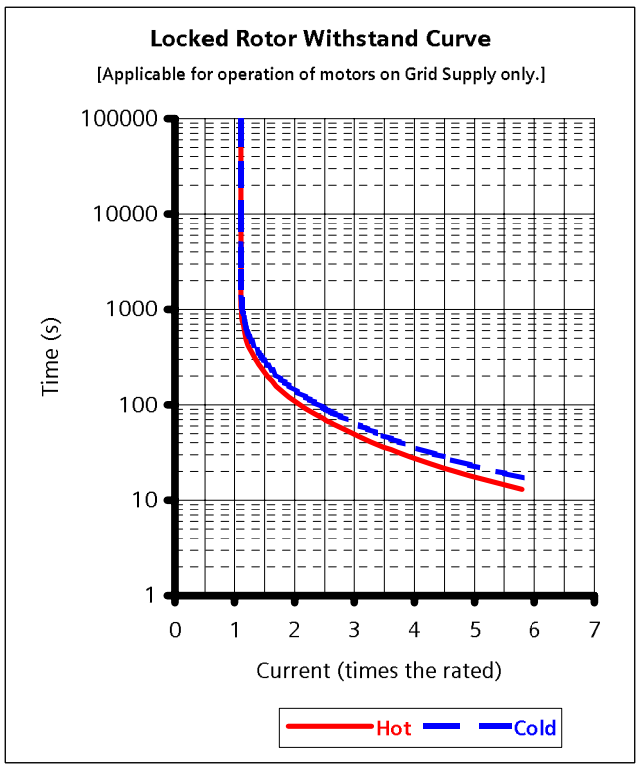

KALWA, INDIA Department : PD LD P LV-Motors	Reference Document MTR 2.6-242aa	Printed & Chkd : Atul Jugade Date : 02.02.2018 [Signature]	Format Release Date Aug '2011

Format reference: MTR 7.1-007

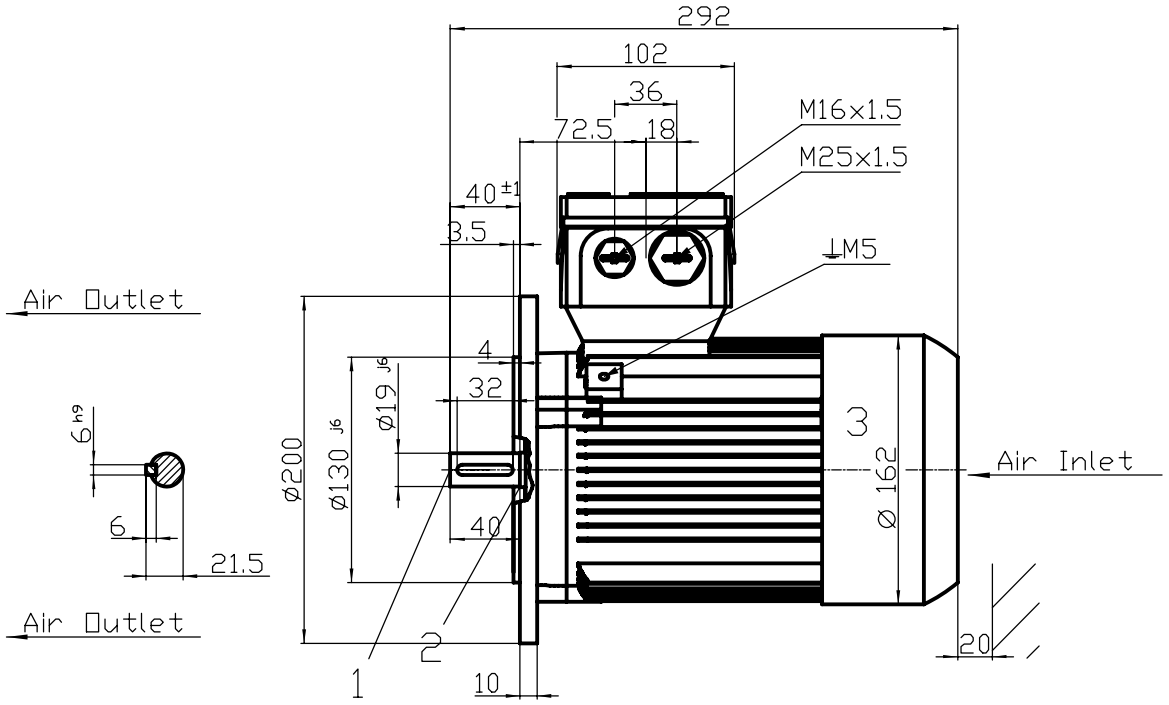

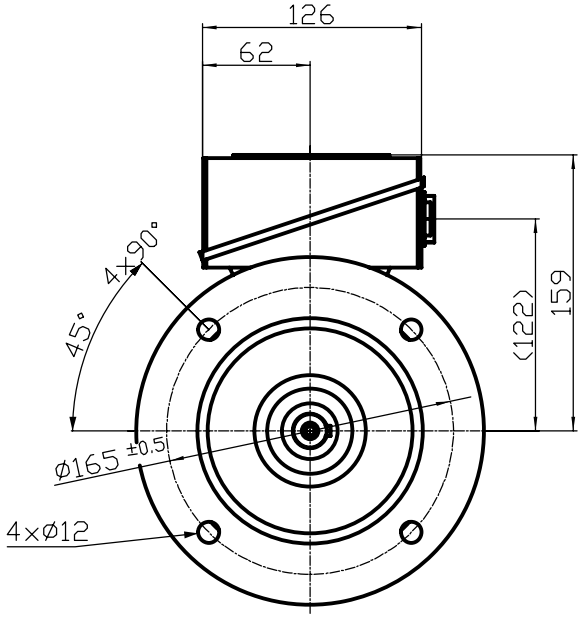

1) Protected centre hole M6x16
2) Relief groove as per DIN509 / IS:3428
3) Measured across screw heads

Tolerance: DIN EN 50347, Untolerated Dimensions- ISO 2768v / IS2102v	Surface	Material	Weight: -	Scale: mm
FS.:80M; Const.:IMB5 1LE7501-0DB32-3FA4 -	Author Creator: DTK Approval Department Change Order	Dimensional drawing		
SIEMENS	Doc State: 1/30/18 Revision Index: RS	MLFB Item No Doc No	Doc Type: / Paper Size: A4 Language: en	
© Siemens AG 2016	Project No -	Ref No -	Sheet: 1 of 1	

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited. Offenders will be held liable for payment of damages. All rights created by patent grant or registration of a utility model or design patent are reserved.