We Make Possible

NIHVA





FT-320

PEDESTRIAN

Normally Open :This is an energy saving mode. If the system detects intrusion on illegal entry, arms will be auto locked to stop the passenger.

Normally Close :FT-320 is in a locked status. System will unlock for passengers to pass through when receiving legal passing signals.

Energy Saving :Auto-balanced positioning design requires no power. Smooth movement with low electric power consumption.

Safety Design :The arm will auto drop upon receiving fire emergency signal. The personnel can leave safely.


Product Descriptions ▶

FT-320 is a micro unit CPU tripod turnstile combining delicacy and flexibility. Designed to work with personnel access management system. It is set up at the entry / exit of access controlled area for uni-directional of bi-directional control. FT-320 can connect to recognition systems, monitor systems, coin acceptors, ticket readers, credit card machines and punch clocks..etc.

Product Advantages ▶

- We adopt interactive detection to enhance logical control and to reduce machine movements. This can reduce wear rate and power consumption. The unique mechanical design increases Mean Cycles Between Failure (MCBF) and enables longer service life.
- Single independent electric lock for bi-directional control. Electric lock needs no electricity for regular passage, and thus realizes effective management of electricity. The efficiency of electricity use is remarkably strengthened.
- Auto-balanced positioning design requires no motor power. It saves both energy and maintenance parts.
- Customer can change passage modules and parameter settings to suit for various sites.
- Delicate dropped arm mechanism is not only stable and safe, but also reliable and sustainable.

FT-320

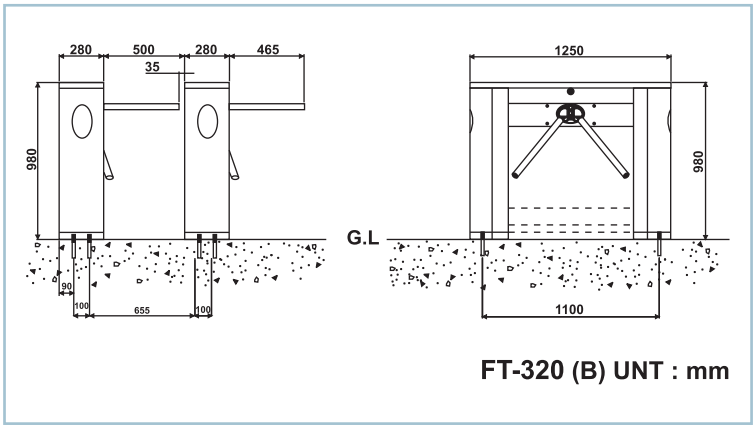

FT-320 (B) UNT : mm

Functional Features

- Entry / exit signal input
- Fire alarm / free passage signal input
- Entry / exit status output
- LED traffic light
- Built-in digital counter
- Uni-directional module
- Bi-directional module
- No passage module
- Free passage module
- Buffer time for passing setting
- Alarm sound time setting
- Light display module setting
- Other additional functioning setting
- Auto detection for positioning
- Auto buffering and positioning
- Power : AC100~240V, 50/60Hz, 1PH
- Relative Humidity : 0~85%
- MCBF : >= 1,000,000 cycles
- MTTR : <=15 Mins
- Passage Width : 500~550mm
- Dimensions : 560(L) X 280(W) X 980(H) mm
- Weight : 55KGS / 50KGS
- Certification : ISO 9001 / CE

High Speed
Normally open mode can reach 30 people per minute.

Lower Noise
FT-320 is designed to operate accurately and smoothly. the liquid shock-aborber positioning enables fluent and quiet mechanical movements.

Passage Module
The bi-directional passage is controlled by control panel. Each direction can be set to different modules as follows:
*Control module (Only open when receiving signal of legal passing)
*No Passage module (No passage is permitted.)
*Free passage module (All passages are allowed to passage.)

Normally Open & Normally Close Mode
FT-320 can shift between normally open and normally close modes by changing parameters setting. FT-320 will auto lock up after personnel passed when system under normally close mode.

Power Outage
Users can choose free passage or no passage module during power outage by adjusting solenoid position.

Traffic Light
Passage is allowed when the light turns green and no passage is permitted when the light turns red. If traffic light flash in red, Please check the system or contact with engineer.

RS-485
The RS-485 interface facilitates transfer setting and remote control for users.

Dropped Arm Mechanism
The tripod turnstile will auto drop its arm and become emergency exit passage when receiving power outage or fir alarm inputs.



LED Passage Lights (Option)
The LED passage lights will guide personnel through the passages when people pass the recognition systems.

TCP / IP (Option)
Each passage has independent IP address. Users can use TCP / IP to remote control the tripod turnstile.

Passage Controller (Option)
The passage controller specially made for FT-320 enables function setting and system operation.

NIHVA
NIHVA Technologies Pvt. Ltd.
+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com
G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019.

We Make Possible

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.



Pedestrian Tripod Turnstile Gate



The SEWO S1200 Motorised Tripod Turnstile Gate is typically used for Pedestrian Movement in Factories, Offices, Amusement Parks, Museums, Movie Theatres etc. for efficiently controlling and managing movement of pedestrians.

The Turnstile Gate is offered with a Brush-less DC Motor for the rotating arm movement with an encoder for position sensing. The encoder technology does away with the use of limit switches for the very same purpose.

The Tripod Arm automatically drops down in case of an emergency In-put for safe & quick processing of people safely out through the gate without any obstruction. On resumption of normal condition, the arms will automatically arrive at the blocked position on the top. The tripod turnstile is then ready for normal operation.

The Turnstile Gate can be integrated with varied access Control Systems viz. Proximity Card, Bar Code Tickets, Bio-metric, QR Code Technology etc. Additionally, Shlara Automation can also provide QR Code Readers & Finger Print Readers.

The Brush-less DC drive offers long and reliable service life with an MCBF of over 5 Mil Cycles.

Ho. Off : 187/G Block, 1st Floor, Thermax Chowk, Above Renault Showroom, Chinchwad, Pune 411019

We Make Possible


NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

The Tripod Turnstile is ideal for indoor application but nevertheless can be also deployed outside a building preferably under a canopy for protection from the elements.

The Turnstile is aesthetically & ergonomically designed to locate varied access control systems that may be integrated in a discreet yet easy to access manner.

Provision for Red Green indication lamp, a small screen for Greetings such as Good Morning or Good Evening depending on the time of day is a feature that is built into the turnstile. This screen may alternately be used to display card information that is very useful such as Available Credit, Accessable rides, Name of the Movie & Screen No. etc. are just a few of the options available as value addition that may desired. These are options that must be requested for in advance before the products are delivered.

- Housing material : SUS304 stainless steel /1.5mm (hairline finish)
- Passage width : 550mm
- Working Voltage : AC110/AC220±10% V/50±10% Hz
- Drive Technology : Motorised (Brush-less DC Motor with Encoder for Position Sensing)
- Power : 70W
- Environment : Indoor
- Protection grade : IP43
- Emergency : Drop-Arm Feature built-in with Automatic arm reset on resumption of power
- Noise : < 50DB
- MCBF : > 5 million
- Lightning Protection Grade : Level 3
- Temperature rise of motor : ΔT15˚
- Rotation Speed : 0.4s also Pedestrian controlled
- Throughput : Up to 45 people/Minute Excluding Card Validation
- Temperature : -15℃ to 70℃ relative humidity : ≤95% condensation
- Vandal Protection : Auto-reset in case of collusion against arm or forceful access attempt

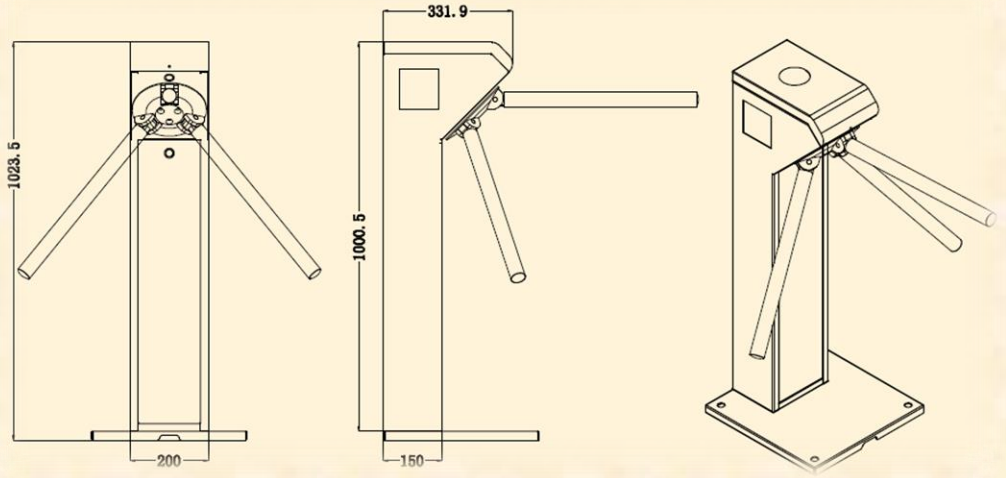

Ho. Off : 187/G Block, 1st Floor, Thermax Chowk, Above Renault Showroom, Chinchwad, Pune 411019

We Make Possible

NIHVA



FT-300

PEDESTRIAN

Normally Open :This is an energy saving mode. If the system detects intrusion on illegal entry. arms will be auto locked to stop the passenger.

Normally Close :FT-300 is in a locked status. System will unlock for passengers to pass through when receiving legal passing signals.

Energy Saving :Auto-balanced positioning design requires no power. Smooth movement with low electric power consumption.

Safety Design :The arm will auto drop upon receiving fire emergency signal. The personnel can leave safely.


Product Descriptions ▶

FT-300 is a micro unit CPU tripod turnstile combining delicacy and flexibility. Designed to work with personnel access management system. It is set up at the entry / exit of access controlled area for uni-directional of bi-directional control. FT-300 can connect to recognition systems, monitor systems, coin acceptors, ticket readers, credit card machines and punch clocks..etc.

Product Advantages ▶

- We adopt interactive detection to enhance logical control and to reduce machine movements. This can reduce wear rate and power consumption. The unique mechanical design increases Mean Cycles Between Failure (MCBF) and enables longer service life.
- Single independent electric lock for bi-directional control. Electric lock needs no electricity for regular passage, and thus realizes effective management of electricity. The efficiency of electricity use is remarkably strengthened.
- Auto-balanced positioning design requires no motor power. It saves both energy and maintenance parts.
- Customer can change passage modules and parameter settings to suit for various sites.
- Delicate dropped arm mechanism is not only stable and safe, but also reliable and sustainable.

FT-300

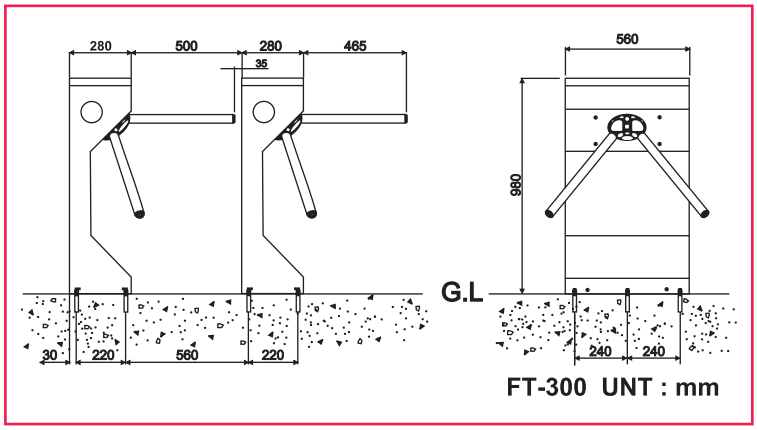

Functional Features

- Entry / exit signal input
- Fire alarm / free passage signal input
- Entry / exit status output
- LED traffic light
- Built-in digital counter
- Uni-directional module
- Bi-directional module
- No passage module
- Free passage module
- Buffer time for passing setting
- Alarm sound time setting
- Light display module setting
- Other additional functioning setting
- Auto detection for positioning
- Auto buffering and positioning
- Power : AC100~240V, 50/60Hz, 1PH
- Relative Humidity : 0~85%
- MCBF : >= 1,000,000 cycles
- MTTR : <=15 Mins
- Passage Width : 500~550mm
- Dimensions : 560(L) X 280(W) X 980(H) mm
- Weight : 35KGS
- Certification : ISO 9001 / CE

High Speed
Normally open mode can reach 30 people per minute.

Lower Noise
FT-300 is designed to operate accurately and smoothly. the liquid shock-aborber positioning enables fluent and quiet mechanical movements.

Passage Module
The bi-directional passage is controlled by control panel. Each direction can be set to different modules as follows:
*Control module (Only open when receiving signal of legal passing)
*No Passage module (No passage is permitted.)
*Free passage module (All passages are allowed to passage.)

Normally Open & Normally Close Mode
FT-300 can shift between normally open and normally close modes by changing parameters setting. FT-300 will auto lock up after personnel passed when system under normally close mode.

Power Outage
Users can choose free passage or no passage module during power outage by adjusting solenoid position.

Traffic Light
Passage is allowed when the light turns green and no passage is permitted when the light turns red. If traffic light flash in red, Please check the system or contact with engineer.

RS-485
The RS-485 interface facilitates transfer setting and remote control for users.

Dropped Arm Mechanism
The tripod turnstile will auto drop its arm and become emergency exit passage when receiving power outage or fir alarm inputs.



LED Passage Lights (Option)
The LED passage lights will guide personnel through the passages when people pass the recognition systems.

TCP / IP (Option)
Each passage has independent IP address. Users can use TCP / IP to remote control the tripod turnstile.

Passage Controller (Option)
The passage controller specially made for FT-300 enables function setting and system operation.

NIHVA
NIHVA Technologies Pvt. Ltd.
+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com
G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019.

Goosafe
ACCESS SECURITY SOLUTION

NIHVA



FT-310

PEDESTRIAN

Normally Open :This is an energy saving mode. If the system detects intrusion on illegal entry, arms will be auto locked to stop the passenger.

Normally Close :FT-310 is in a locked status. System will unlock for passengers to pass through when receiving legal passing signals.

Energy Saving :Auto-balanced positioning design requires no power. Smooth movement with low electric power consumption.

Safety Design :The arm will auto drop upon receiving fire emergency signal. The personnel can leave safely.


Product Descriptions ▶

FT-310 is a micro unit CPU tripod turnstile combining delicacy and flexibility. Designed to work with personnel access management system. It is set up at the entry / exit of access controlled area for uni-directional of bi-directional control. FT-310 can connect to recognition systems, monitor systems, coin acceptors, ticket readers, credit card machines and punch clocks..etc.

Product Advantages ▶

- We adopt interactive detection to enhance logical control and to reduce machine movements. This can reduce wear rate and power consumption. The unique mechanical design increases Mean Cycles Between Failure (MCBF) and enables longer service life.
- Single independent electric lock for bi-directional control. Electric lock needs no electricity for regular passage, and thus realizes effective management of electricity. The efficiency of electricity use is remarkably strengthened.
- Auto-balanced positioning design requires no motor power. It saves both energy and maintenance parts.
- Customer can change passage modules and parameter settings to suit for various sites.
- Delicate dropped arm mechanism is not only stable and safe, but also reliable and sustainable.

FT-310

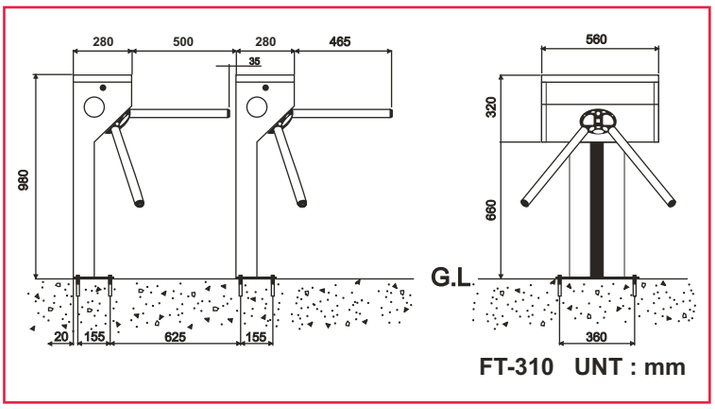

Functional Features

- Entry / exit signal input
- Fire alarm / free passage signal input
- Entry / exit status output
- LED traffic light
- Built-in digital counter
- Uni-directional module
- Bi-directional module
- No passage module
- Free passage module
- Buffer time for passing setting
- Alarm sound time setting
- Light display module setting
- Other additional functioning setting
- Auto detection for positioning
- Auto buffering and positioning
- Power : AC100~240V, 50/60Hz, 1PH
- Relative Humidity : 0~85%
- MCBF : >= 1,000,000 cycles
- MTTR : <=15 Mins
- Passage Width : 500~550mm
- Dimensions : 560(L) X 280(W) X 980(H) mm
- Weight : 32KGS
- Certification : ISO 9001 / CE

High Speed
Normally open mode can reach 30 people per minute.

Lower Noise
FT-310 is designed to operate accurately and smoothly. the liquid shock-aborber positioning enables fluent and quiet mechanical movements.

Passage Module
The bi-directional passage is controlled by control panel. Each direction can be set to different modules as follows:
*Control module (Only open when receiving signal of legal passing)
*No Passage module (No passage is permitted.)
*Free passage module (All passages are allowed to passage.)

Normally Open & Normally Close Mode
FT-310 can shift between normally open and normally close modes by changing parameters setting. FT-310 will auto lock up after personnel passed when system under normally close mode.

Power Outage
Users can choose free passage or no passage module during power outage by adjusting solenoid position.

Traffic Light
Passage is allowed when the light turns green and no passage is permitted when the light turns red. If traffic light flash in red, Please check the system or contact with engineer.

RS-485
The RS-485 interface facilitates transfer setting and remote control for users.

Dropped Arm Mechanism
The tripod turnstile will auto drop its arm and become emergency exit passage when receiving power outage or fir alarm inputs.



LED Passage Lights (Option)
The LED passage lights will guide personne through the passages when people pass th recognition systems.

TCP / IP (Option)
Each passage has independent IP address. Users can use TCP / IP to remote control the tripod turnstile.

Passage Controller (Option)
The passage controller specially made for FT-300 enables function setting and system operation.

NIHVA
NIHVA Technologies Pvt. Ltd.
+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com
Samir Plaza, 1st Floor, G-Block Thermax Chowk, Chinchwad, Pune - 411019.

NIHVA

NIHVA Technologies Pvt. Ltd.





FT-330

PEDESTRIAN

Normally Open :This is an energy saving mode. If the system detects intrusion on illegal entry, arms will be auto locked to stop the passenger.

Normally Close :FT-330 is in a locked status. System will unlock for passengers to pass through when receiving legal passing signals.

Energy Saving :Auto-balanced positioning design requires no power. Smooth movement with low electric power consumption.

Safety Design :The arm will auto drop upon receiving fire emergency signal. The personnel can leave safely.


Product Descriptions ▶

FT-330 is a micro unit CPU tripod turnstile combining delicacy and flexibility. Designed to work with personnel access management system. It is set up at the entry / exit of access controlled area for uni-directional of bi-directional control. FT-330 can connect to recognition systems, monitor systems, coin acceptors, ticket readers, credit card machines and punch clocks..etc.

Product Advantages ▶

- We adopt interactive detection to enhance logical control and to reduce machine movements. This can reduce wear rate and power consumption. The unique mechanical design increases Mean Cycles Between Failure (MCBF) and enables longer service life.
- Single independent electric lock for bi-directional control. Electric lock needs no electricity for regular passage, and thus realizes effective management of electricity. The efficiency of electricity use is remarkably strengthened.
- Auto-balanced positioning design requires no motor power. It saves both energy and maintenance parts.
- Customer can change passage modules and parameter settings to suit for various sites.
- Delicate dropped arm mechanism is not only stable and safe, but also reliable and sustainable.

FT-330

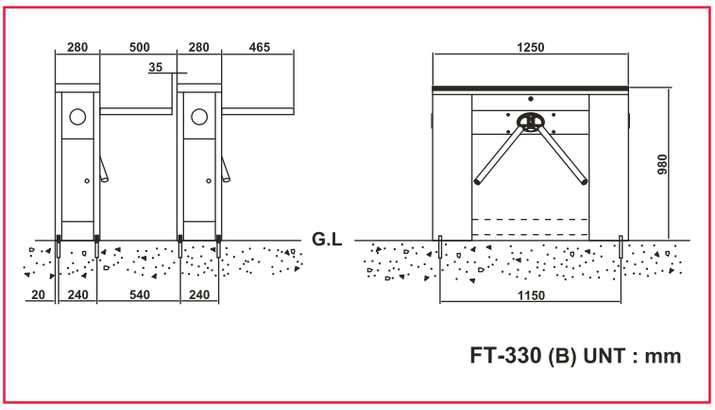

FT-330 (B) UNT : mm

Functional Features

- Entry / exit signal input
- Fire alarm / free passage signal input
- Entry / exit status output
- LED traffic light
- Built-in digital counter
- Uni-directional module
- Bi-directional module
- No passage module
- Free passage module
- Buffer time for passing setting
- Alarm sound time setting
- Light display module setting
- Other additional functioning setting
- Auto detection for positioning
- Auto buffering and positioning
- Power : AC100~240V, 50/60Hz, 1PH
- Relative Humidity : 0~85%
- MCBF : >= 1,000,000 cycles
- MTTR : <=15 Mins
- Passage Width : 500~550mm
- Dimensions : 560(L) X 280(W) X 980(H) mm
- Weight : 55KGS / 50KGS
- Certification : ISO 9001 / CE

High Speed
Normally open mode can reach 30 people per minute.

Lower Noise
FT-330 is designed to operate accurately and smoothly. the liquid shock-aborber positioning enables fluent and quiet mechanical movements.

Passage Module
The bi-directional passage is controlled by control panel. Each direction can be set to different modules as follows:
*Control module (Only open when receiving signal of legal passing)
*No Passage module (No passage is permitted.)
*Free passage module (All passages are allowed to passage.)

Normally Open & Normally Close Mode
FT-330 can shift between normally open and normally close modes by changing parameters setting. FT-330 will auto lock up after personnel passed when system under normally close mode.

Power Outage
Users can choose free passage or no passage module during power outage by adjusting solenoid position.

Traffic Light
Passage is allowed when the light turns green and no passage is permitted when the light turns red. If traffic light flash in red, Please check the system or contact with engineer.

RS-485
The RS-485 interface facilitates transfer setting and remote control for users.

Dropped Arm Mechanism
The tripod turnstile will auto drop its arm and become emergency exit passage when receiving power outage or fir alarm inputs.



LED Passage Lights (Option)
The LED passage lights will guide personne through the passages when people pass th recognition systems.

TCP / IP (Option)
Each passage has independent IP address. Users can use TCP / IP to remote control the tripod turnstile.

Passage Controller (Option)
The passage controller specially made for FT-330 enables function setting and system operation.

NIHVA
NIHVA Technologies Pvt. Ltd.
+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com
G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019.

We Make Possible

NIHVA



EF-715/EF-715w

PEDESTRIAN

Slim :Unique 300mm width refined stainless steel cabinet provides spacious and comfortable 550mm ergonomic passages.

Safe :Panel will automatically close upon detection of unauthorized access. It fulfills anti-tailgating detection output and passage security level setting.

Fast :High passage speed, up to 40 people per minute.

Quiet:DC brushless servo motor provides years of quiet and reliable operation.


Meticulous Craftsmanship with Exquisite Elegance

The simple and slim appearance of EF-715 presents outstanding ambience with designer's creativity and craftsmen's expertise. The polished cabinet shines with luxury and attracts everyone's attention.

EF-715 Speed Gate is set up at entrance and exit of passage area. The system can be connected with recognition system, surveillance system, coin acceptor, card reader and ticket validation system. Uni-directional, bi-directional and no passage modules can be selected by remote control. If passengers are recognized, panel will open speedily. One person is allowed to pass each time. System alarm will out put when sensors detect tailgating.

ER-715 is suitable for an area of high-volume pedestrian access and high security control requirements, such as stations, airport, corporate headquarters, business buildings, etc. It enhances the effect of automatic unmanned management and raises the whole quality of the site.

EF-715/ EF-715W

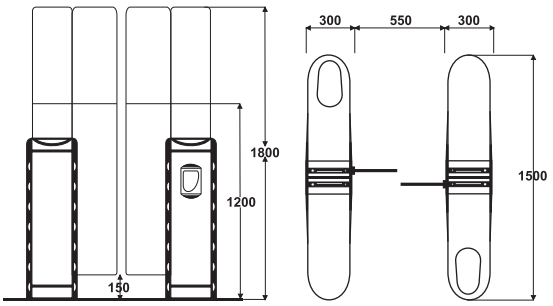

EF-715 UNT : mm

Reasonable Design

- 550mm wide passages are comfortable and ergonomic.
- Recognition system, card readers and ticket validators, can hide in the cabinet.
- Inner circuit adopts DC 24V and DC 12V to drive and control for safety.
- Built-in 8-digit counter can display passage records.
- Function setting by parameters is highly adaptive to different environments.
- Stainless steel structure a stable environment for EF-715. Our design can reduce the vibration and metal fatigue, and also rising machine's efficiency and long life cycle.
- Cabinet with 1.5mm thickness, SUS-304 brushed stainless steel or coating.
- 12mm transparent high-strength and impact resistant panel.

Outstanding Features

- Alternative heights of tempered glass panel can prevent fraudulent passing over.
- Panel's open or close movement can automatically self-correct at the same time.
- EF-715 can adjust panel's open or close speed by parameters setting. (From 0.5 to 2 seconds)
- Output torsion of panel can be adjusted and anti-trap safety detection is available.
- EF-715 can withstand 100% continuous full-time frequent operation.
- System can self-detect errors all the time. Alert system will send an error message to central when system is in an error status.
- Panel will automatically open for emergency or power outage.(Option)
- Current Consumption: Maximum 2.0A / AC 220V

Motor Design

- High performance and stable DC brushless servo motor suitable for long-term continuous operation without temperature rises.
- DC brushless servo controller can digitalize power output. We use this advantage to set up speed and torsion for open / close panel.
- Motor controller with movement coding monitor can detect extraordinary external force. System will stop power output to prevent damage.

Digital Control

- Built-in controller with entry, exit, and bi-directional modes.
- We design different function dry contacts on our control panel for various type of space.
- System with the function of warning, detection, Protection and anti-noise.
- DC 12V Logic Voltage.
- Anti-tailgating and reverse intruding detection.
- Memorizing continuous open panel signal input setting
- Panel automatically close after timeout period of 1~30 secs by setting
- 8+ set logic photocells detection.

LED Traffic Light, LED Passage Light and Voice Alarm

- LED Traffic Light : Passage is allowed when the light turns green, and no passage is permitted when the light turns red.
- LED Passage Light : EF-715 can use LED light to show people the messages : insert your card, stop reading cards, and successful.
- Voice alarm will urge people safely pass through before time is up.

Standards

- Operating Temperature: 0~45˚c
- Relative Humidity: 0~85%
- Weight: Left cabinet : 76KGS
  Middle cabinet : 90KGS
  Right cabinet : 75KGS
- Power: AC110 / 2220V, 50 / 60Hz, 1 PH
- Photocells: 8PCS
- Quality Certification: ISO 9001 / CE
- Dimension: 1500(L) × 300/450(W) × 980(H)mm

Input and Output

- Entry / exit direction input
- Open status input
- Compelling open signal input
- Fire alarm input
- Passage completion output
- Error status alert
- Tailgating alert
- Reverse intruding alert

Remote Control

- RS-485 Interface
- TCP / IP network remote control allows changes of remote control modes and panels opening settings. (Option)
- Remote control box. (Option)

Reliability

- Modular Design : easy to repair and maintain
- MCBF: ≥ 1,500,000 Cycles
- MTTR: ≤ 30 mins

NIHVA


NIHVA Technologies Pvt. Ltd.

+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com

G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019.

NIHVA



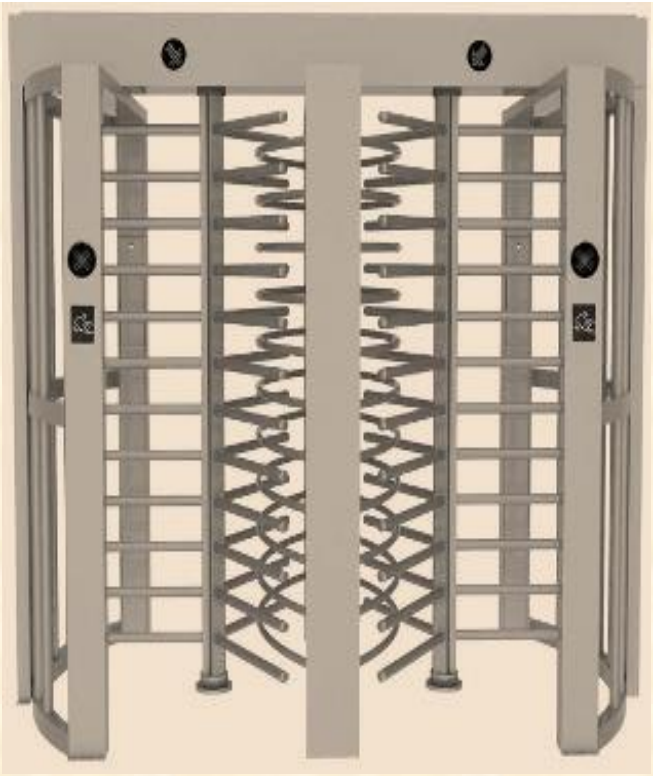

Pedestrian Full Height Turnstile Gate (Motorised)



The SEWO 5711 a Single Lane Access & 5721 a Dual Lane Access Motorised Full Height Turnstile Gates are typically used for Pedestrian Movement in Factories, Offices, Amusement Parks, Museums, Sports Stadia etc., where a slightly higher level of security is desired. There are perfect for access control at perimeter of various facilities as they serve as strong pedestrian traffic control mechanism.

The Turnstile Gate is offered with a Brush-less DC Motor for the rotating arm movement of 120˚ indexing with an encoder for position sensing. The encoder technology does away with the use of limit switches for the very same purpose.

The Central arm rotates freely in case of an emergency In-put for safe & quick processing of people out through the gate. On resumption of normal condition, the rotating arms will lock and then will rotate only on authorized access.

The Turnstile Gate can be integrated with varied access Control Systems viz. Proximity Card, Bar Code Tickets, Bio-metric, QR Code Technology etc. Additionally, Shlara Automation can also provide QR Code Readers & Finger Print Readers.

The Brush-less DC drive offers long and reliable service life with an MCBF of over 5 Mil Cycles.
The Full Height Turnstile is ideal for both indoor as well as outdoor applications.

HO. Off : 187/ G-Block, 1st Floor, Thermax Chowk, Above Renault Showroom, Chinchwad, Pune 411019

The Turnstile is aesthetically & ergonomically designed to locate varied access control systems that may be integrated in a easy to access manner.

Provision for Red Green indication lamp, a small screen for Greetings such as Good Morning or Good Evening depending on the time of day is a feature that is built into the turnstile. This screen may alternately be used to display card information that is very useful such as Available Credit, accessable rides, Name of the Movie & Screen No. etc. are just a few of the options available as value addition that may desired. These are options that must be requested for in advance before the products are delivered.

- Housing material : SUS304 stainless steel /2mm (hairline finish)
- Dimension Single Lane : 2300 X 1630 X 1500mm
- Dimension Dual Lane : 2300 X 2300 X 1540mm
- Passage width : 650mm
- Working Voltage : AC110/AC220±10% V/50±10% Hz
- Drive Technology : Motorised (Brush-less DC Motor with Encoder for Position Sensing)
- Power : 70W
- Environment : Indoor / Outdoor
- Emergency : Free Arm rotation & on resumption of power arms will lock.
- Noise : < 50DB
- MCBF : > 5 million
- Lightning Protection Grade : Level 3
- Temperature rise of motor : ΔT15˚
- Rotation Speed : 0.4s also Pedestrian controlled
- Throughput : Up to 20 people/Minute Excluding Card Validation
- Temperature : -15℃ to 70℃ relative humidity : ≤95% condensation