Ravel MOVEMENT CONTROL
A Ravel Group Company

RAVEL MOVEMENT CONTROL PVT. LTD.
Registered Office:
150A, Electronics Industrial Estate,
Perungudi, Chennai - 600 006, INDIA
Ph: +91 44 2496 1004 / 0825

PEDESTRIAN

FULLY AUTOMATIC VERTICAL TRIPOD TURNSTILE - RMC-PTT-550





Equipment Introduction

The Ravel Pedestrian Tripod Turnstile with its simple design is a product that is extensively used applications such as a metro, school, office, park, gym, factory, residential buildings, supermarkets etc. These Tripod Turnstiles can support integration with a host of access control devices viz. RFID, fingerprint, proximity cards, Barcode & QR Code Scanners and several other biometric devices. Moreover, in combine with infrared detector & temperature controller, the products scope of application widely expands.

The Ravel Tripod design is an integration of machinery, electronics, and microprocessor controller for a variety of identity recognition technology.


Function introduction:

1. It has fault self-test and alarm prompt function, which is convenient for users to maintain and use.
2. Can be connected to any control device output control signal or button or remote control, to achieve single bidirectional control pass.
3. The Tripod may be programmed for uni-direction access & bi-directional access as well.
4. Hold Open Time: On flashing a card the Tripod arm must be moved to initiate action. If there is no action initiated the arm locks itself after a 10 second hold open time.
5. Light indication: High-brightness traffic light status indication, guide the passage.
6. Anti-tailing function: The design is such that tailgating is negated. However, if there is an attempt to pass through after an operation is completed the arm locks and initiates an alarm condition if the thrust continues.
7. Fire input: Fire input connection may be terminated for initiation of fail-safe operation during emergency.
8. Input Memory function: In case of heavy traffic, the system can accept more than one card for quick processing of traffic.
9. Anti-reverse function: When the reversal occurs during the passage, the brake lever will automatically start the reverse thrust blocking and issue an alarm. After the external force disappears, the passage will automatically resume.
11. Drop Arm Function: The Tripod Arm drops automatically during emergency and when power is cut. On resumption of power/normalcy the Tripod arm is deployed in blocking position and is then ready for normal operation.
12. Dynamic reminder: On receiving a signal for access the arm moves about 5 degrees, and thereafter a soft touch rotates the arm to complete an access and stops.

Ravel MOVEMENT CONTROL
A Ravel Group Company

RAVEL MOVEMENT CONTROL PVT. LTD.
Registered Office:
150A, Electronics Industrial Estate,
Perungudi, Chennai - 600 006, INDIA
Ph: +91 44 2496 1004 / 0825

TECHNICAL SPECIFICATIONS

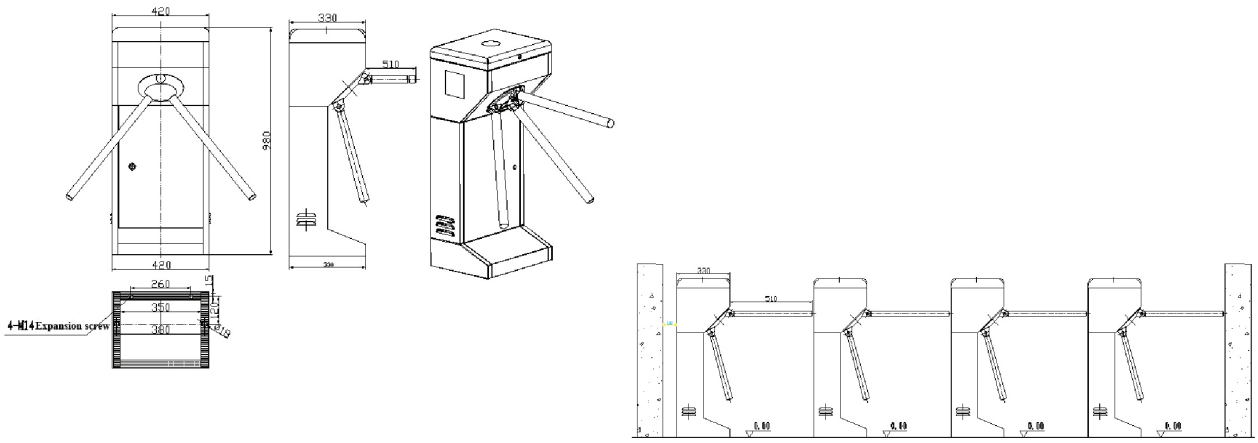

Note: All size, shape and function can be customized as per customers' requirements.

Model Number	RMC-PTT-550
Shell material	SUS304 stainless steel
Size	420 x 330 x 980mm
Weight	80KG
Rod length/thickness	500 (mm) / ¢ 38 stainless steel tube.
Passage width	600 mm
Rod working driving force	3Kg.
Motor	24V / 30W brushless.
Positioning accuracy	1/500 yards.
Adaptation temperature	-40 °C ~ 80 °C. (Need to add temperature control system)
Adaptation humidity	5% - 90%
Opening time	0.2 seconds.
Delay reset time	≥3S adjustable.
Passing speed	≥30 people/minute.
Working environment	indoors and outdoors.