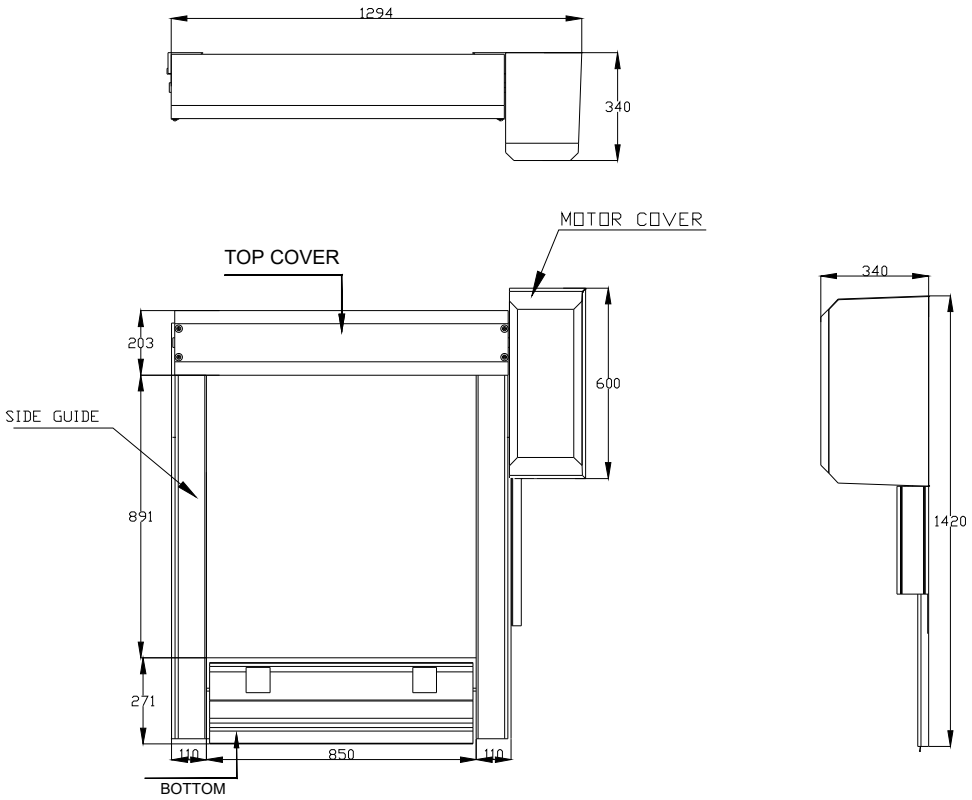



## TECHNICAL SPECIFICATION :

DATE

| SR. | SPECIFICATIONS | DETAILS |
|---|---|---|
| 1 | USE | INTERNAL DOOR |
| 2 | SIDE FRAMES | ALUMINUM ANODIZED TWO PARTS, TO HAVE EASY ACCESS TO SWITCHES & SERVICE. |
| 3 | DOOR BLADE | PVC MATERIAL TRANSPARENT WITH REINFORCEMENT STRIPES . |
| 4 | BOTTOM BEAM | ALUMINUM,ANODIZED |
| 5 | DRIVE UNIT | DRIVE UNIT IP55,EITHER RH OR LH AS AN OPTION , WITH CONTROL CABLE. |
| 6 | ACCESSORIES | TOP COVER & MOTOR COVER |
| 7 | CONTROL SYSTEM | MCC FREQUENCY CONVERTER VECTOR CONTROL FOR OPENING /CLOSING SPEED UP TO 2.4/ 1.4 M/S FOR DOOR WITH SAFETY CONTACT EDGE, PROTECTION IP55.WITHOUT DISPLAY,INTERFACE CARD DELIVERED SEPARATELY , INCLUDING POWER & INTERFACE CABLE ,WITH MAIN SWITCH IN SEPARATE BOX. |
| 8 | RAL CODE | CONFIRM BY CLIENT |

| SR.NO | CLEAR WIDTH (MM) | CLEAR HEIGHT (MM) | QTY |
|---|---|---|---|
| 1 | 850 | 950 | 2 |

NOTE :

1.ALL DIMENSION ARE IN MM

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 320

NIHVA Technologies Pvt. Ltd.

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

| | NAME | SIGNATURE | DATE |
|---|---|---|---|
| DRAWN | B.S. | | 10-02-2026 |
| CHK'D | V.T. | | 10-02-2026 |
| APPV'D | V.T. | | 10-02-2026 |

IF ANY QUERIES CONTACT - Design@nihva.com

ALL DIMENSIONS ARE IN 'MM' | A2

PRODUCT - MACHINE PROTECTION DOOR

PROJECT NO - NTPL- 320 | REVISION - 00

SITE LOCATION - | WEIGHT -

MATERIAL - AL | QTY - 2 NOS

PROJECTION METHOD

SCALE :

SHEET 1 OF 1