

logistic solutions

KOPRON


Fixed and Folding Warehouses "Tunnels"

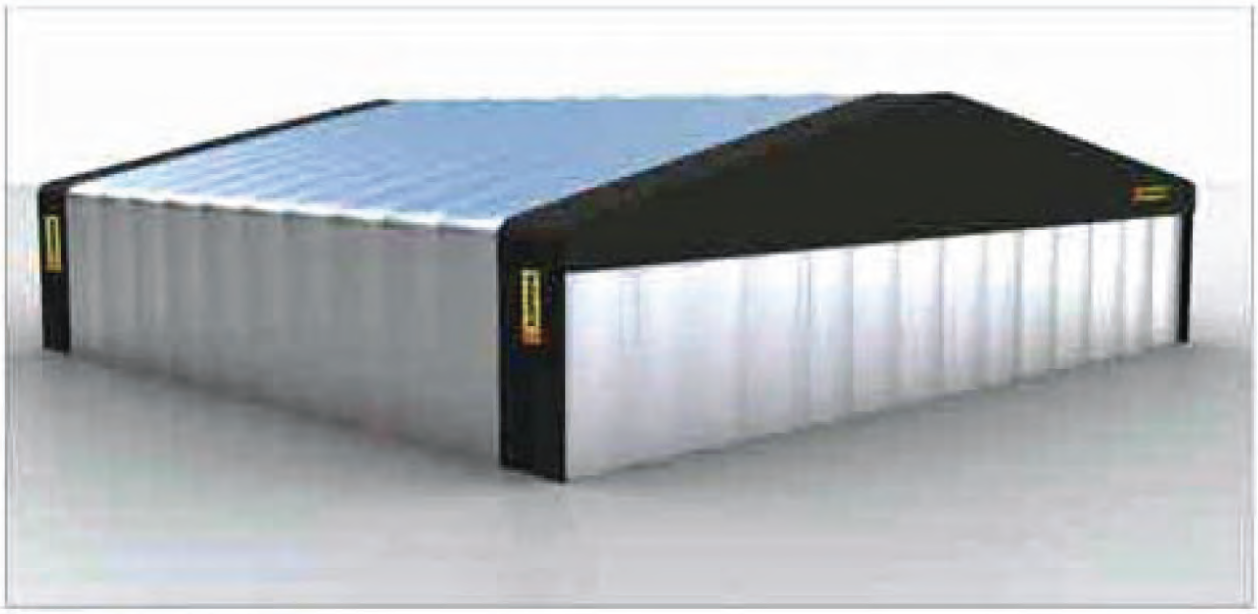


Freestanding
Fixed -Mod. KTF
Folding -Mod KT

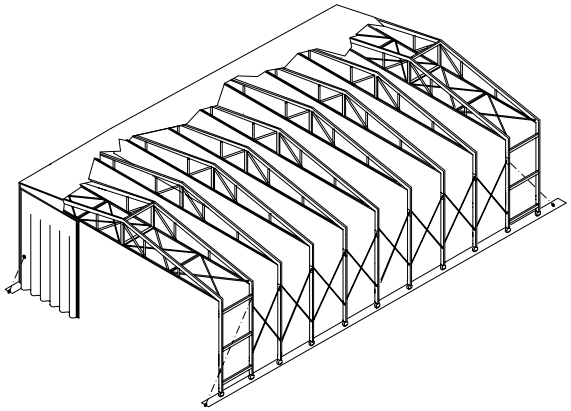


Front mounted
Fixed - Mod. KTF (P)
Folding - Mod. KT (P)

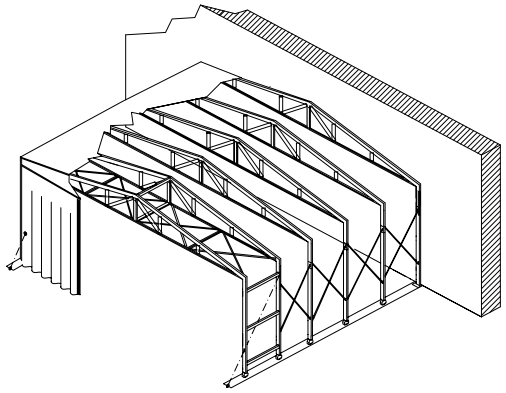


Side mounted
Fixed - Mod. KTZF
Folding - Mod. KTZ

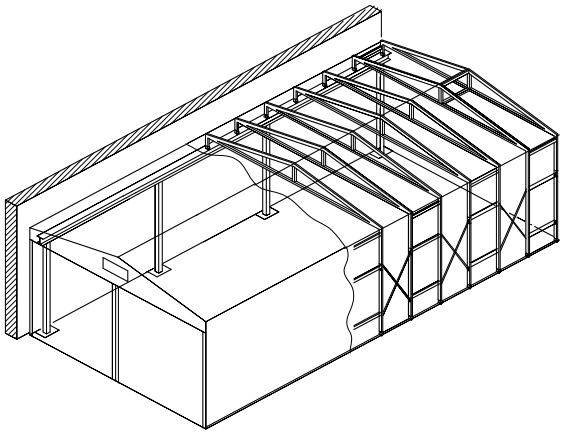


Double side mounted
Fixed - Mod. KTTF
Folding - Mod. KTT

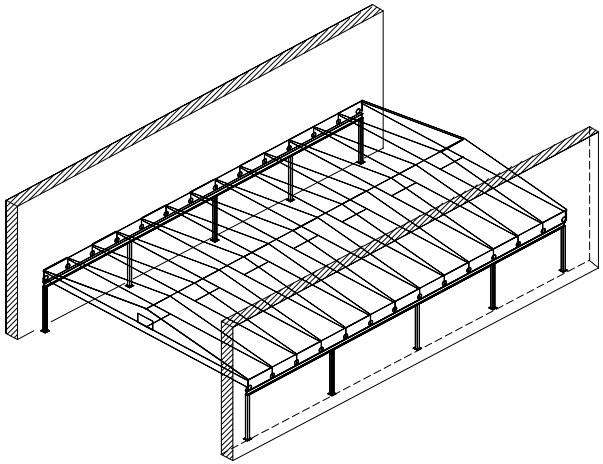

Side mounted- sloping roof
Fixed - Mod. KTZMF
Folding - Mod. KTZM

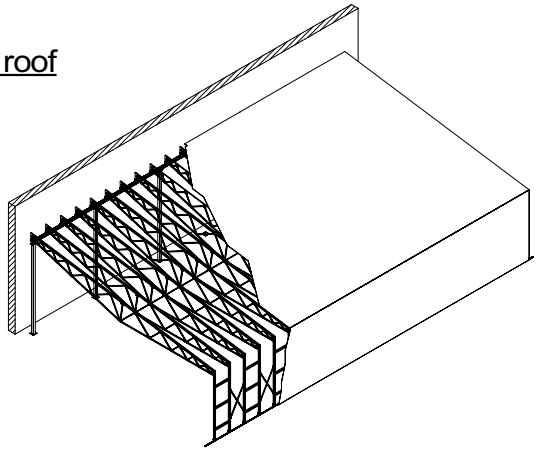

Canopies
Fixed - Mod. KTTSF
Folding - Mod. KTTS

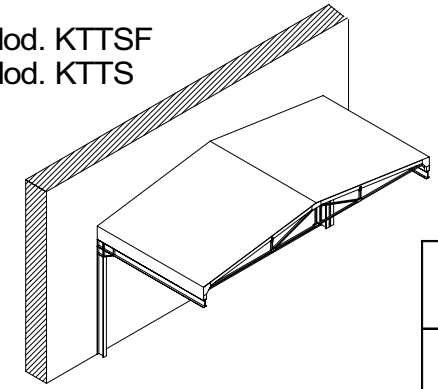

KOPRON

Re: Folding / Fixed Tunnel
Possible configurations

MOD. KT

Description retractable freestanding warehouse

RECTRACTABLE FREESTANDING WAREHOUSE offers a covered area either near the borders of the propriety or in open spaces like courtyards and large squares to stock and protect packed material of all kinds enabling loading/unloading operations under any weather condition.

THE CARRYING STRUCTURE consists of arcs connected to one another by pantograph bars all in galvanised steel with no need of maintenance.
Sliding is performed forged and turned steel wheels provided with double ball bearings positioned in a Kopron patent safety casing, with a device with a special profile 8mm thick, which is windproof and prevents derailment.
Sliding ground tracks are made of a pressed galvanised steel profile, 5 mm thick, and are complete with brackets or bored plates to be anchored to a layer of reinforced concrete.

COVERING consists of a PVC fabric, weighing 900 g/m^2, reinforced in parts mostly subject to wear and tear. It offers high resistance against atmospheric agents and guarantees very long life.

COLOURS AVAILABLE can be matched as follows: - cover WHITE, LIGHT GREY, CREAM COLOUR, GREEN or SILVER GREY with side and front bands ANTHRACITE GREY or SILVER GREY cover with side and front bands RED.

WORKING TEMPERATURE: -30°C +70°C

FIRE RETARDANT: Classe 2


RESISTENCE TO FOLDING: 100.000 folding on same spot.


FIXING OF THE PVC FABRIC ON THE STRUCTURE:
In order to avoid friction and consequently the wear out of the fabric, the joint plates of edges are rounded, this also enables a better tension of the fabric. On the longest trusses the fabric is protected from wear a tear thanks to a double layer of PVC in those points where friction is more frequent. The fabric is anchored to the steel structure by means of welded plates with double steel rings and belts with a breaking strength up to 350kgs


THE FRONTAL AND REAR HEAD are shut in the upper part with a fixed PVC cover anchored to the structure by means of a screwed-on glass-fiber reinforced plastic profile; the lower part can eventually be shut by two half curtains (opened from the center) which slide on an above track through carriages with double ball bearings. They are reinforced by means of metal vertical tubes inserted in pockets created along the curtain about every meter. At the end of the tubes there are locks which are anchored to the ground allowing or a partial opening of the curtain or block it completely. As an alternative to curtains you can choose among the different types of industrial closing systems such as PVC fast-closing doors or folding, sliding and sectional doors


WARRANTY: Ten years for the galvanised steel structure
Six years for the PVC cover

CONSTRUCTION OF THE STRUCTURE : is carried out according to regulations in force

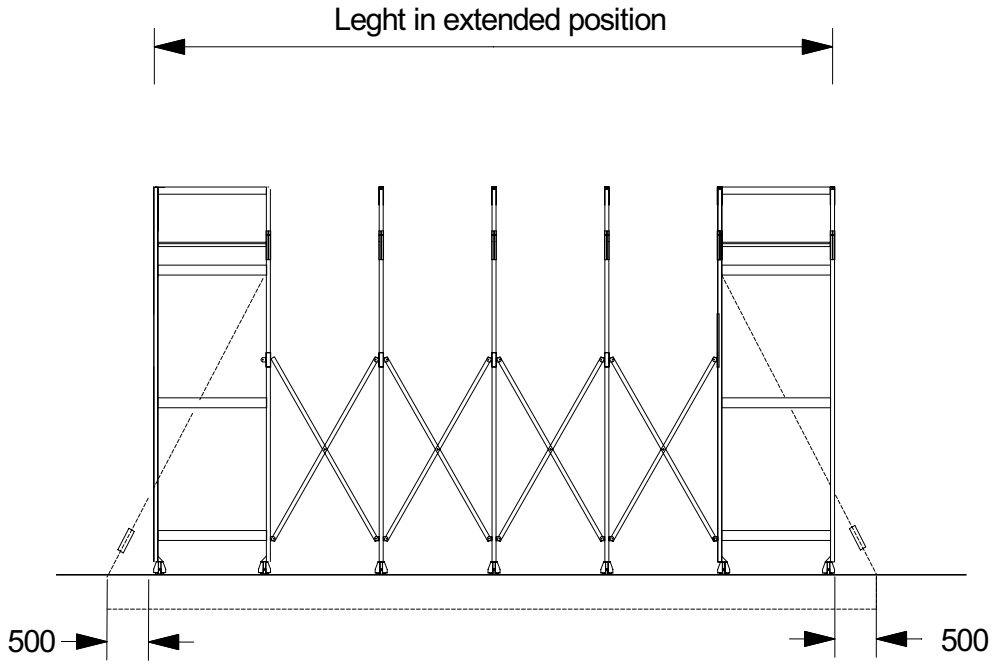

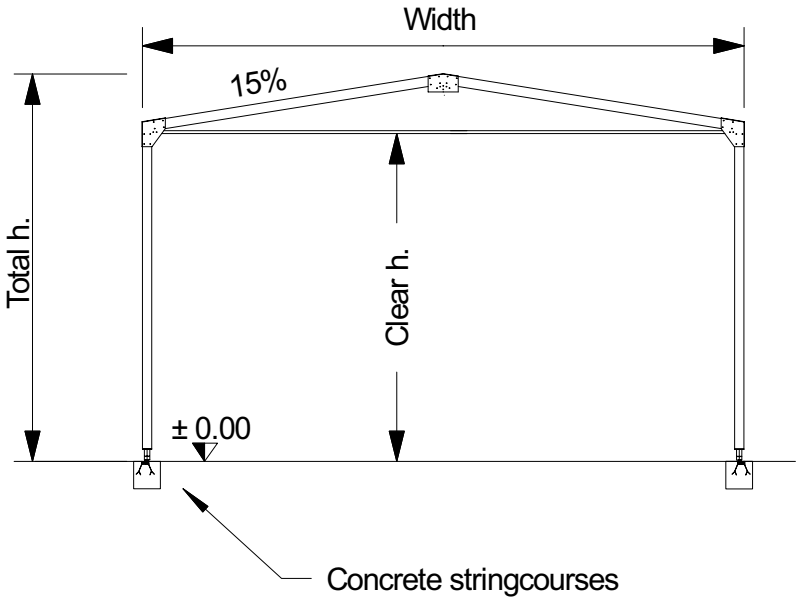

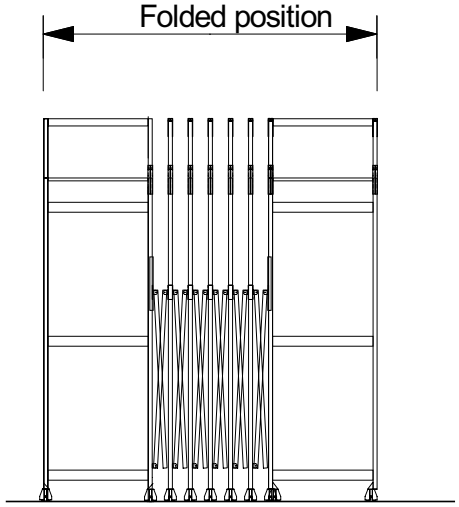


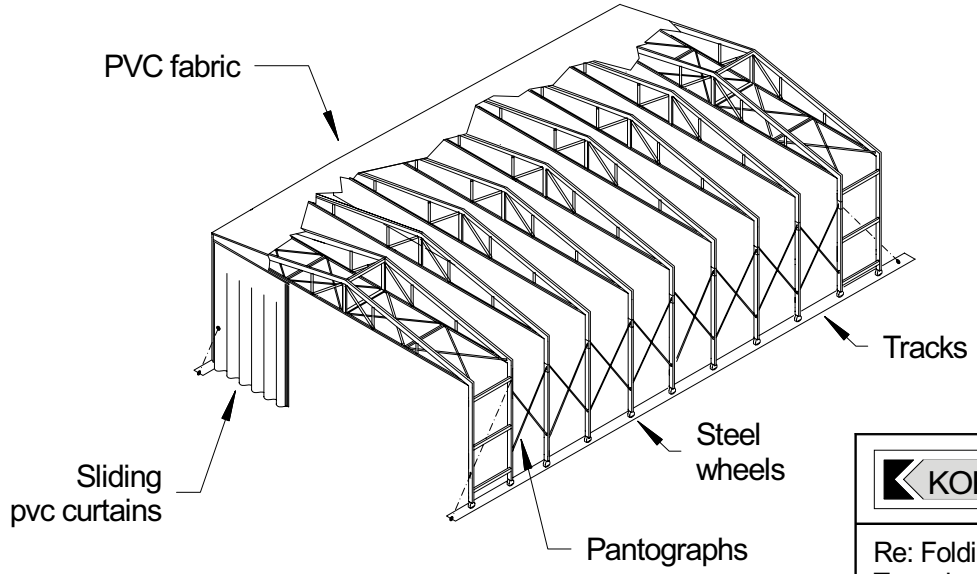


KOPRON

Re: Folding Freestanding Tunnel - Mod. KT -

Rail with anchor bolts

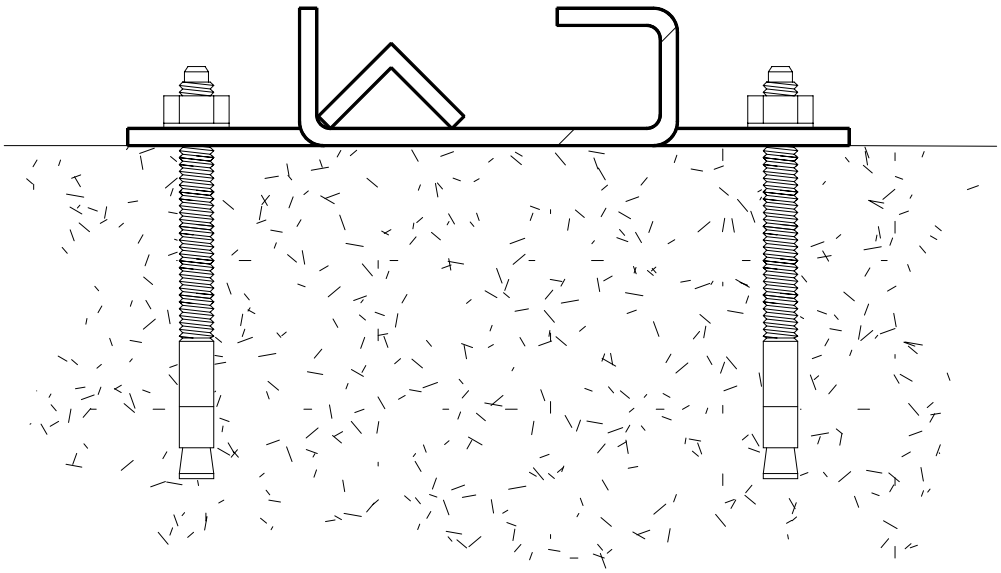


Rail with clamps

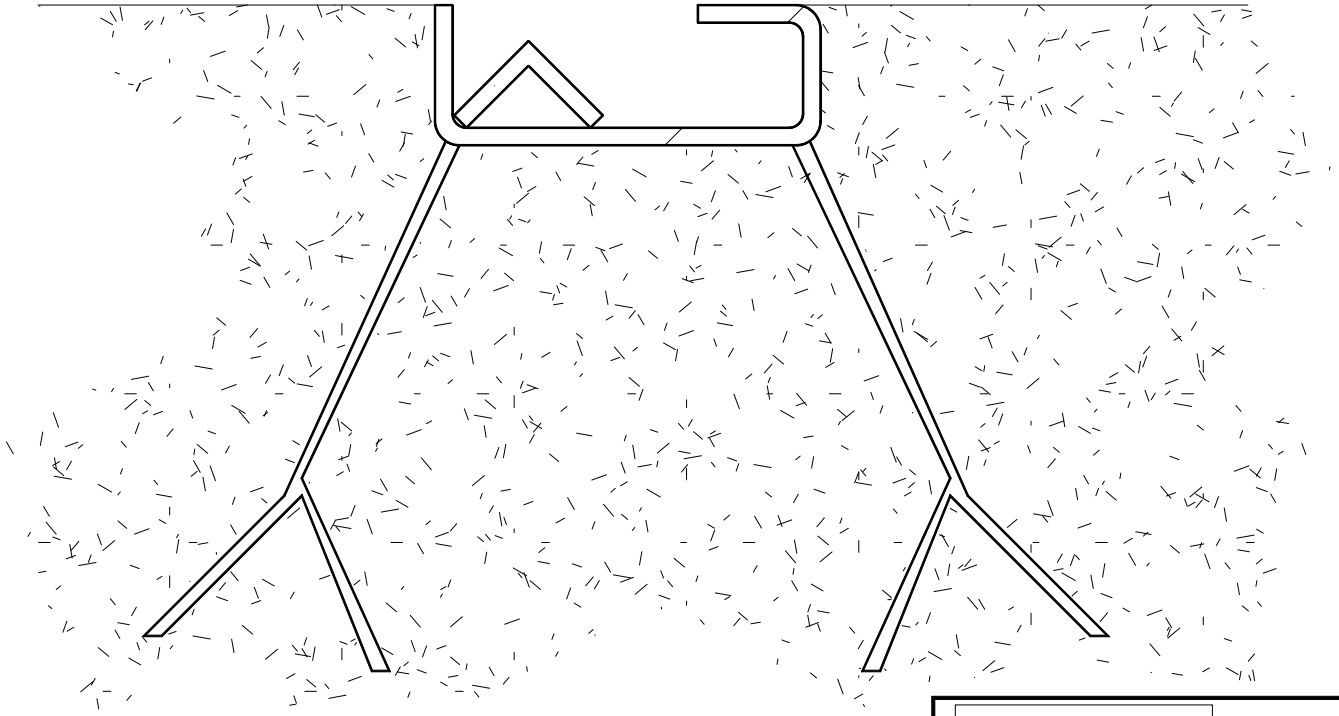

KOPRON

Folding warehouses


Rails possible configurations

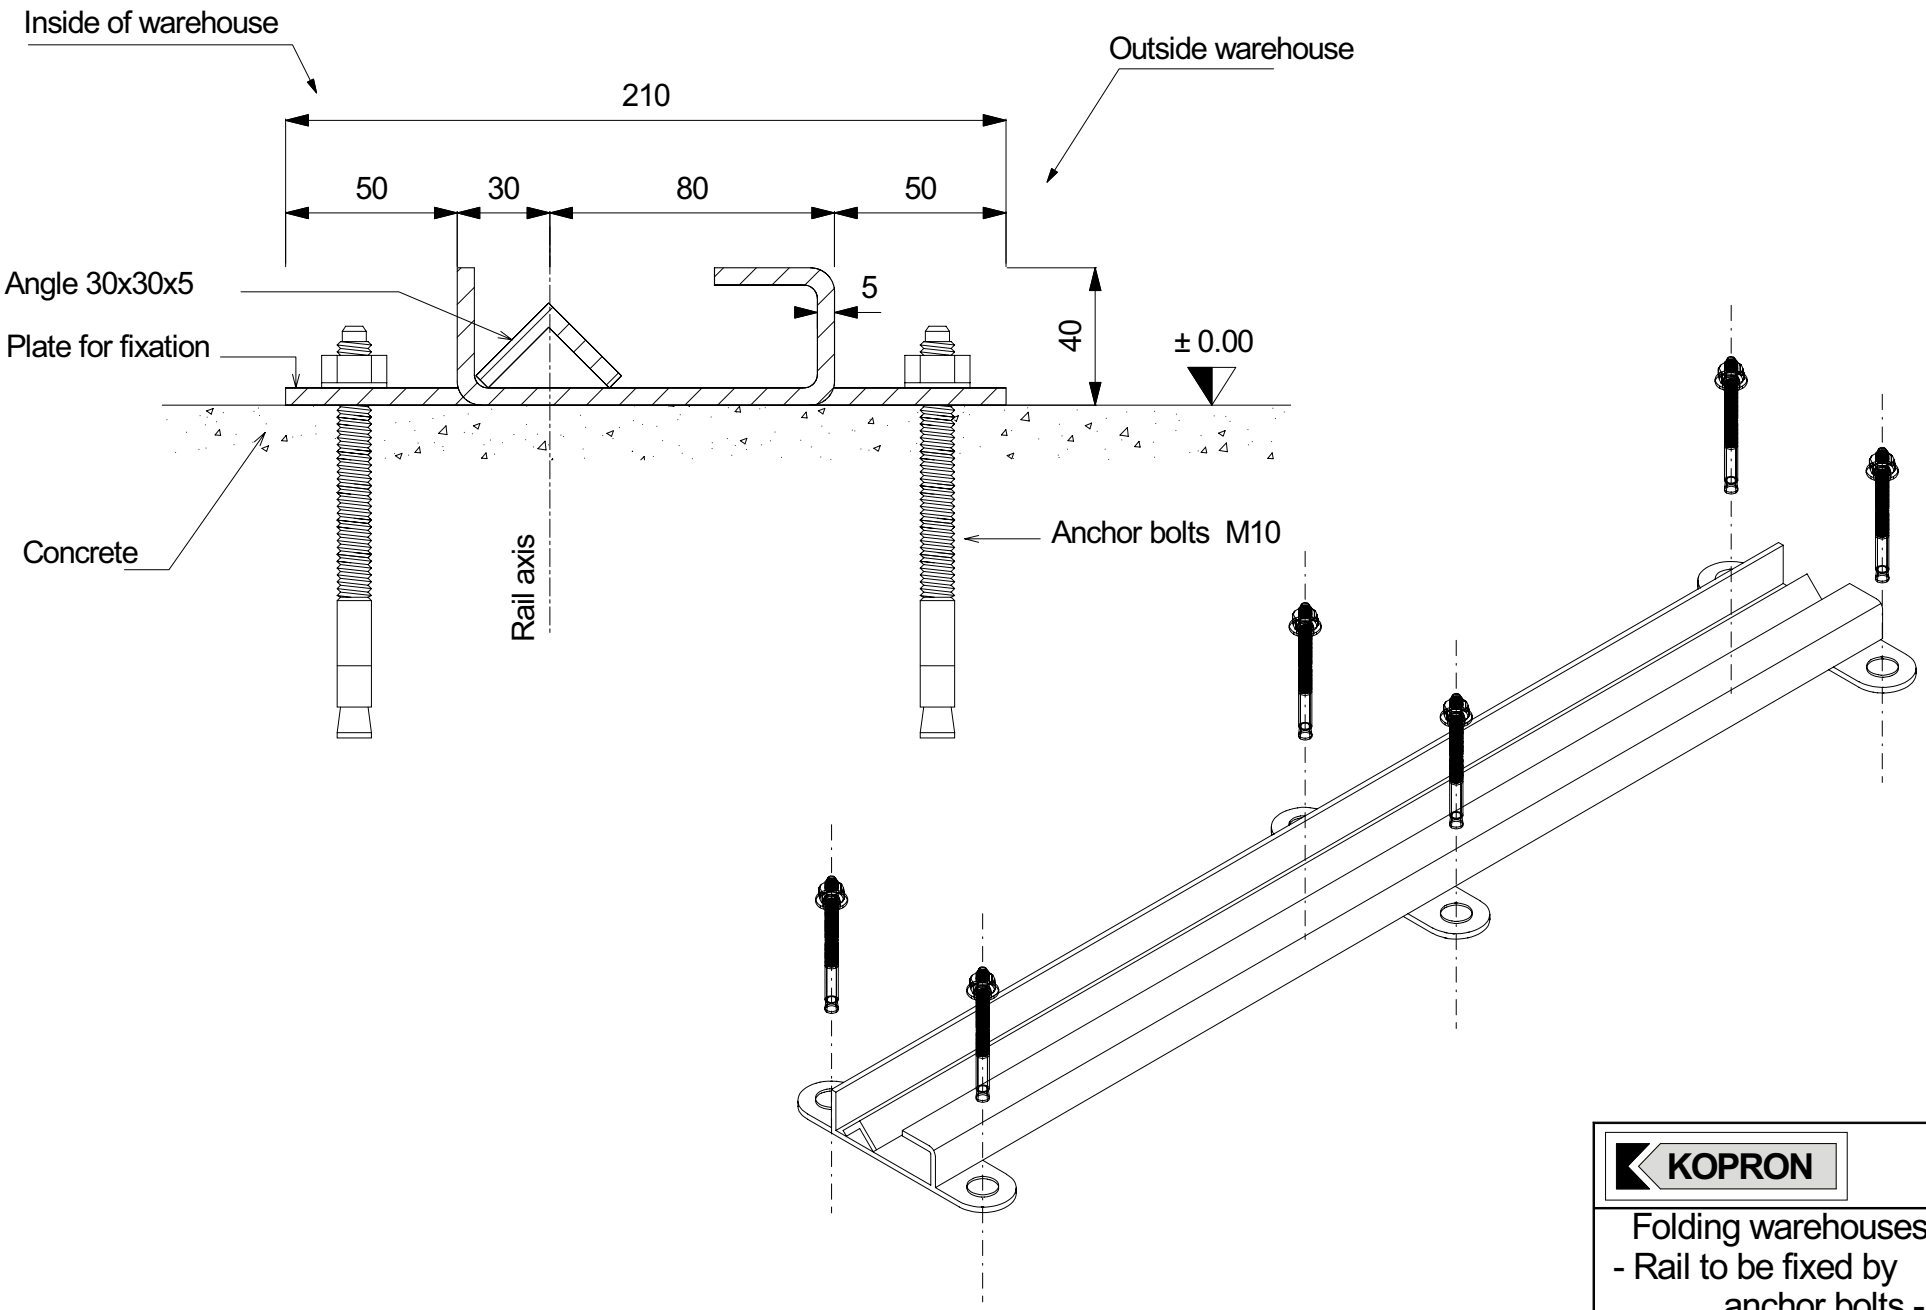

KOPRON

Folding warehouses
- Rail to be fixed by anchor bolts -

GROUND TRACK TO BE FIXED WITH ANCHOR BOLTS

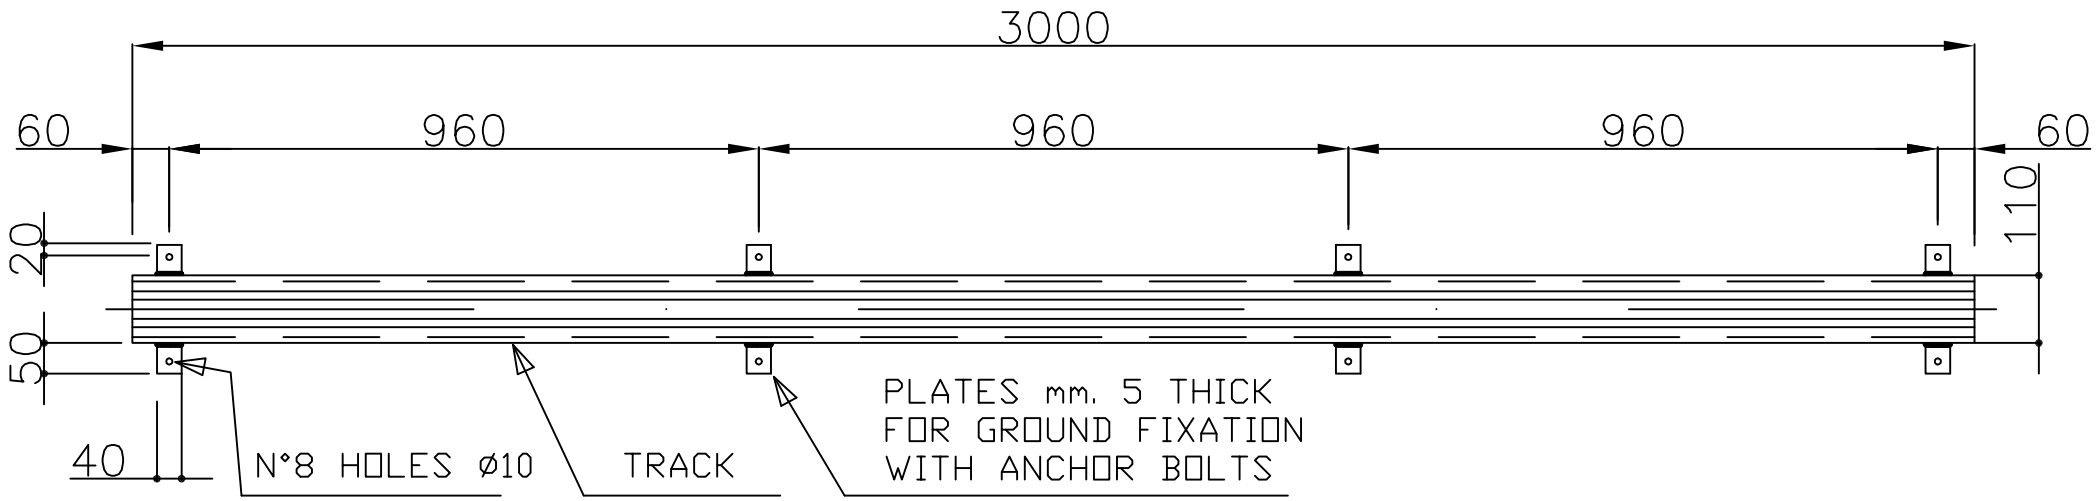

COSTUMER		ORDER NUMBER	JOB NUMBER
DESCRIPTION FOLDING TUNNELS - GROUND TRACK			Material Code
DATE 05/09/11	DRAFTSMAN Luca Rossini	TOLERANCE ±0.1 [mm]	SCALE	DRAWING NUMBER 00 A


logistic solutions KOPRON

Kopron s.p.a. Via I Maggio SN - 20064 Gorgonzola (MI) Tel. 02/921521 Fax 02/92152921 - kopron@kopron.it - www.kopron.it

La società KOPRON s.p.a. si riserva la proprietà del presente disegno con il divieto di riprodurlo o renderlo noto a terzi senza la propria autorizzazione scritta

RETRACTABLE WAREHOUSE

PART: RAIL WITH DOUBLE HOOK

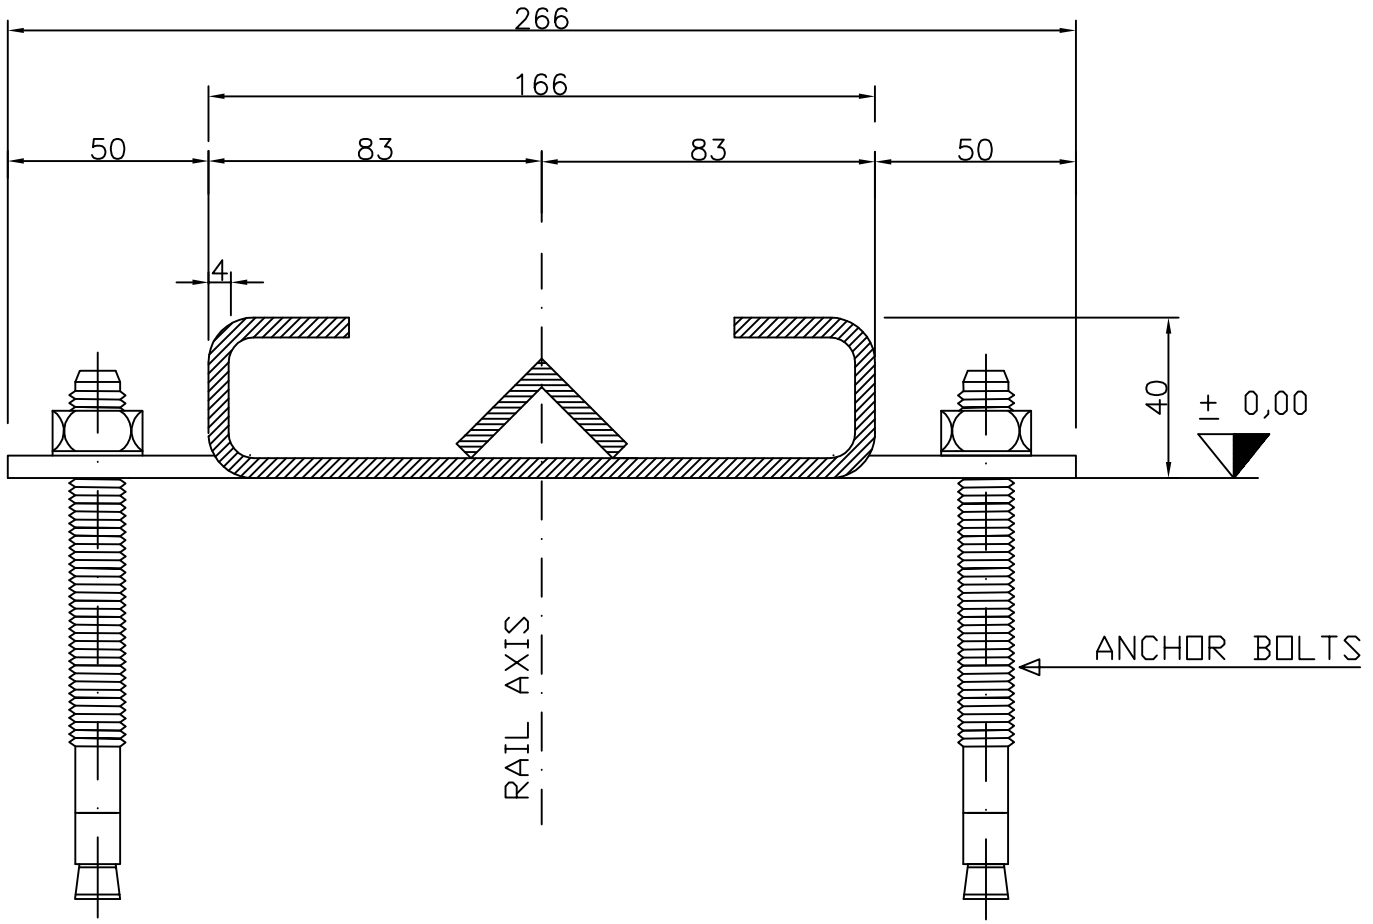



COSTUMER		ORDER NUMBER	JOB NUMBER
DESCRIPTION FOLDING TUNNELS - GROUND TRACKS			Material Code
DATE 05/09/11	DRAFTSMAN Luca Rossini	TOLERANCE ±0.1 [mm]	SCALE	DRAWING NUMBER 00 A


logistic solutions KOPRON


Kopron s.p.a. Via I Maggio SN - 20064 Gorgonzola (MI) Tel. 02/921521 Fax 02/92152921 - kopron@kopron.it - www.kopron.it

La società KOPRON s.p.a. si riserva la proprietà del presente disegno con il divieto di riprodurlo o renderlo noto a terzi senza la propria autorizzazione scritta

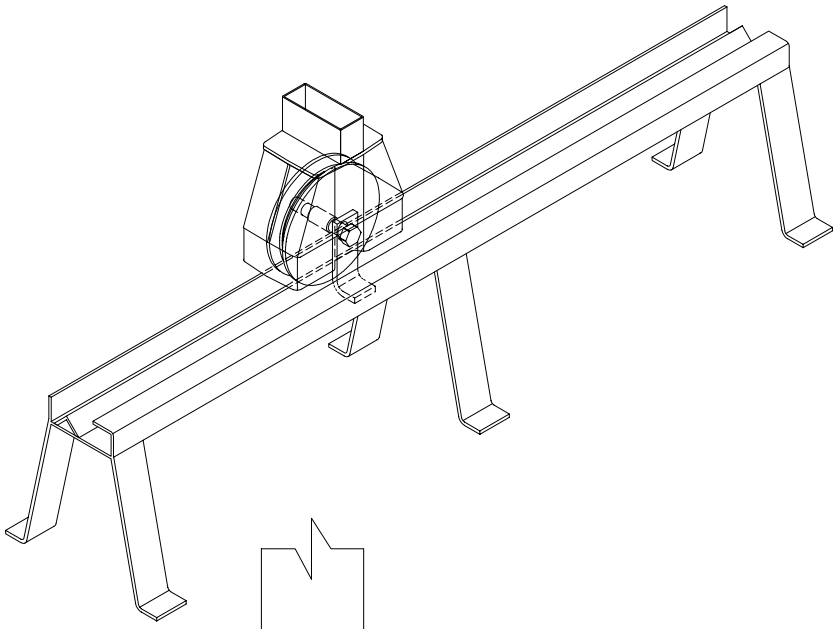

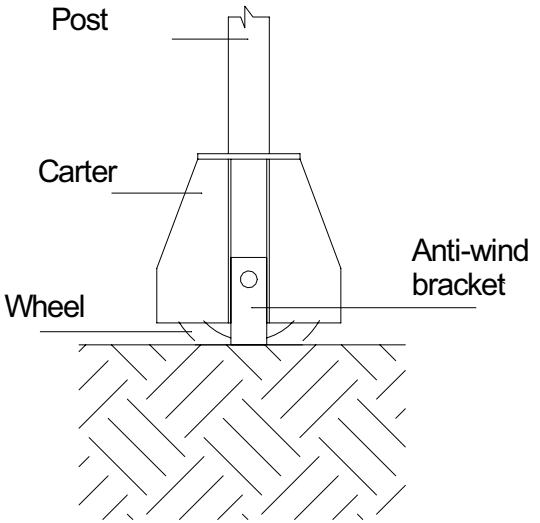

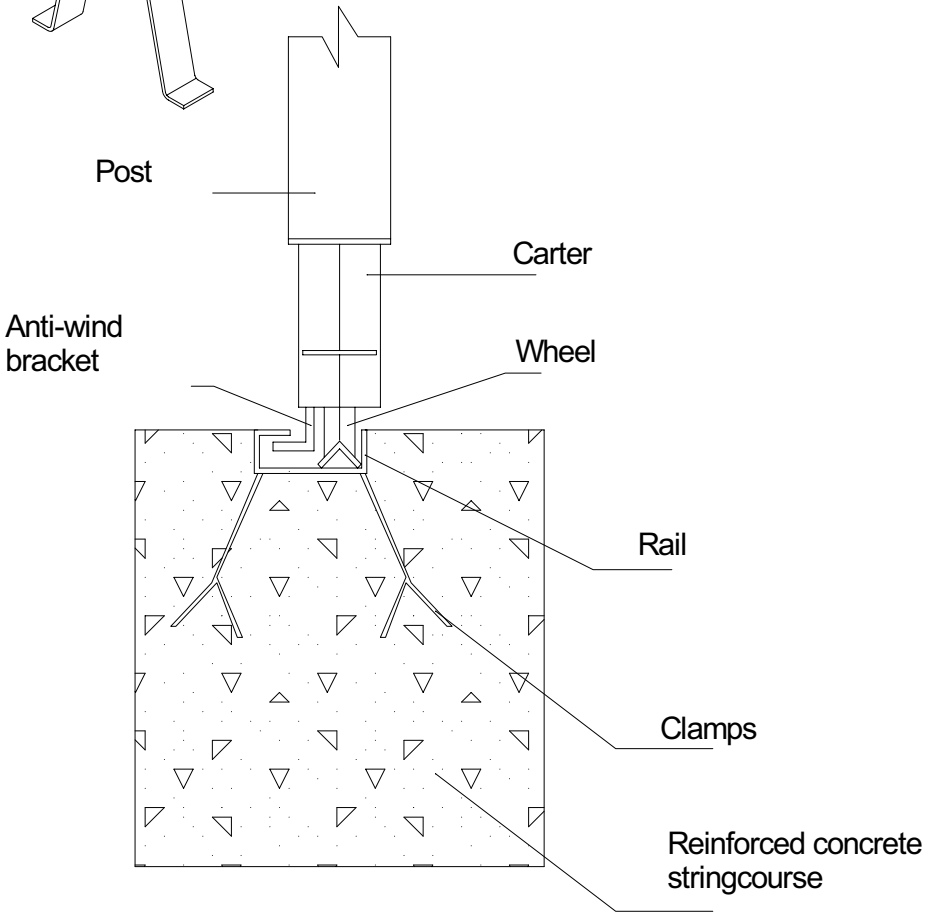

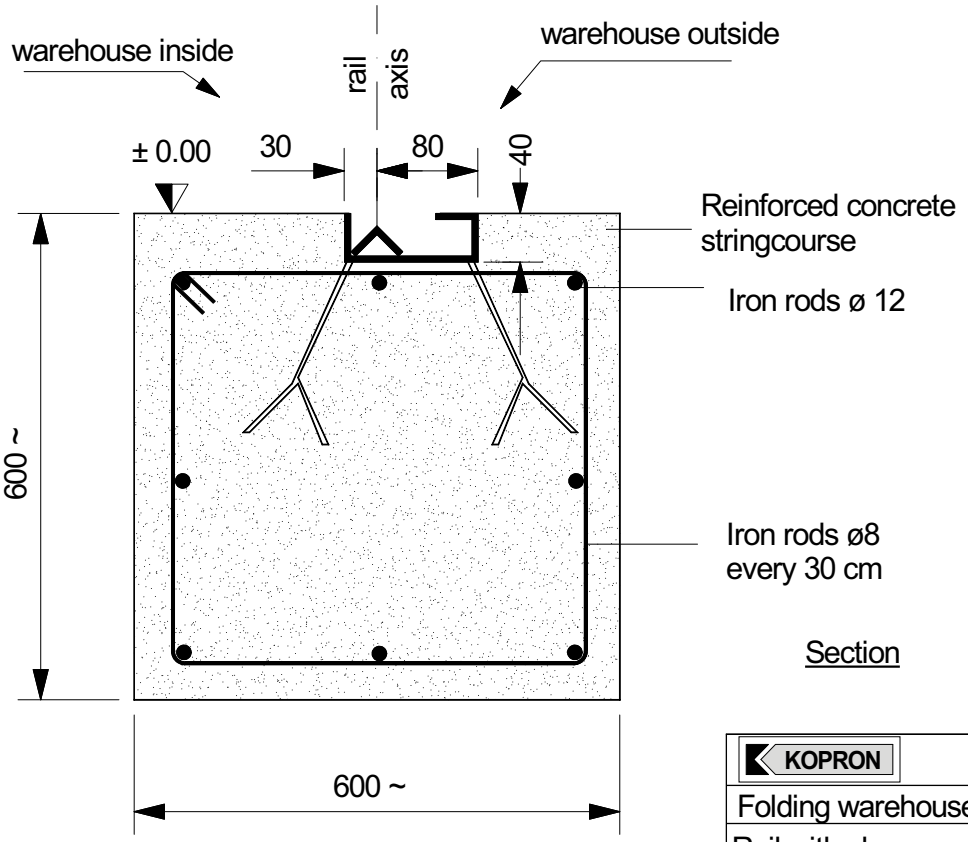


Section

KOPRON

Folding warehouses

Rail with clamps

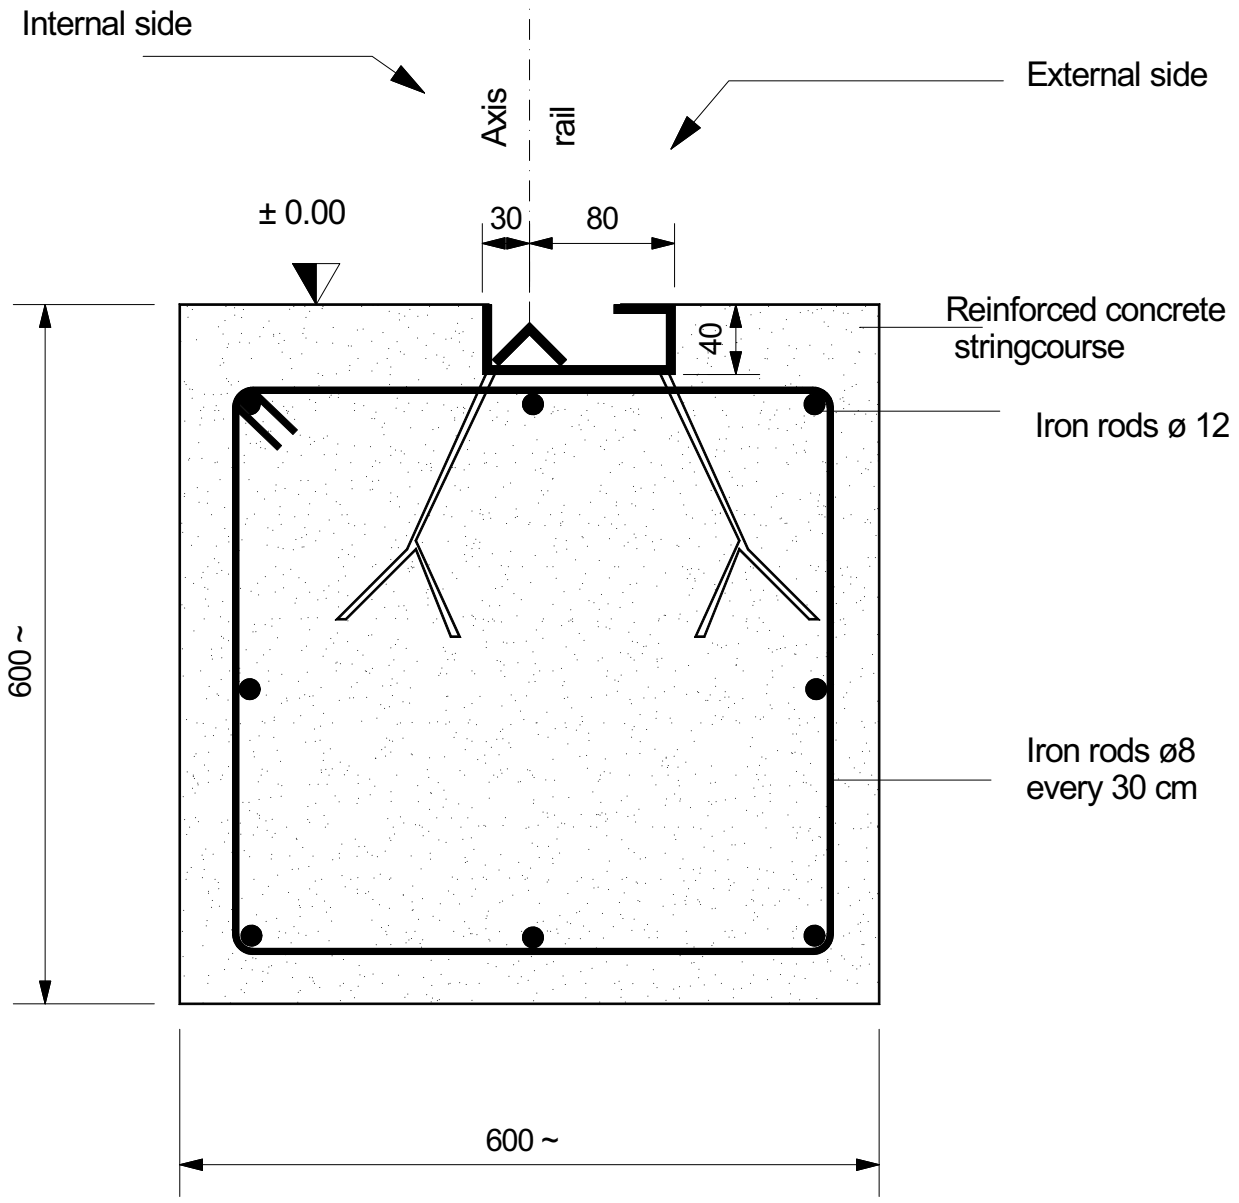


Section

KOPRON

Folding warehouses


Stringcourse for rails with clamps

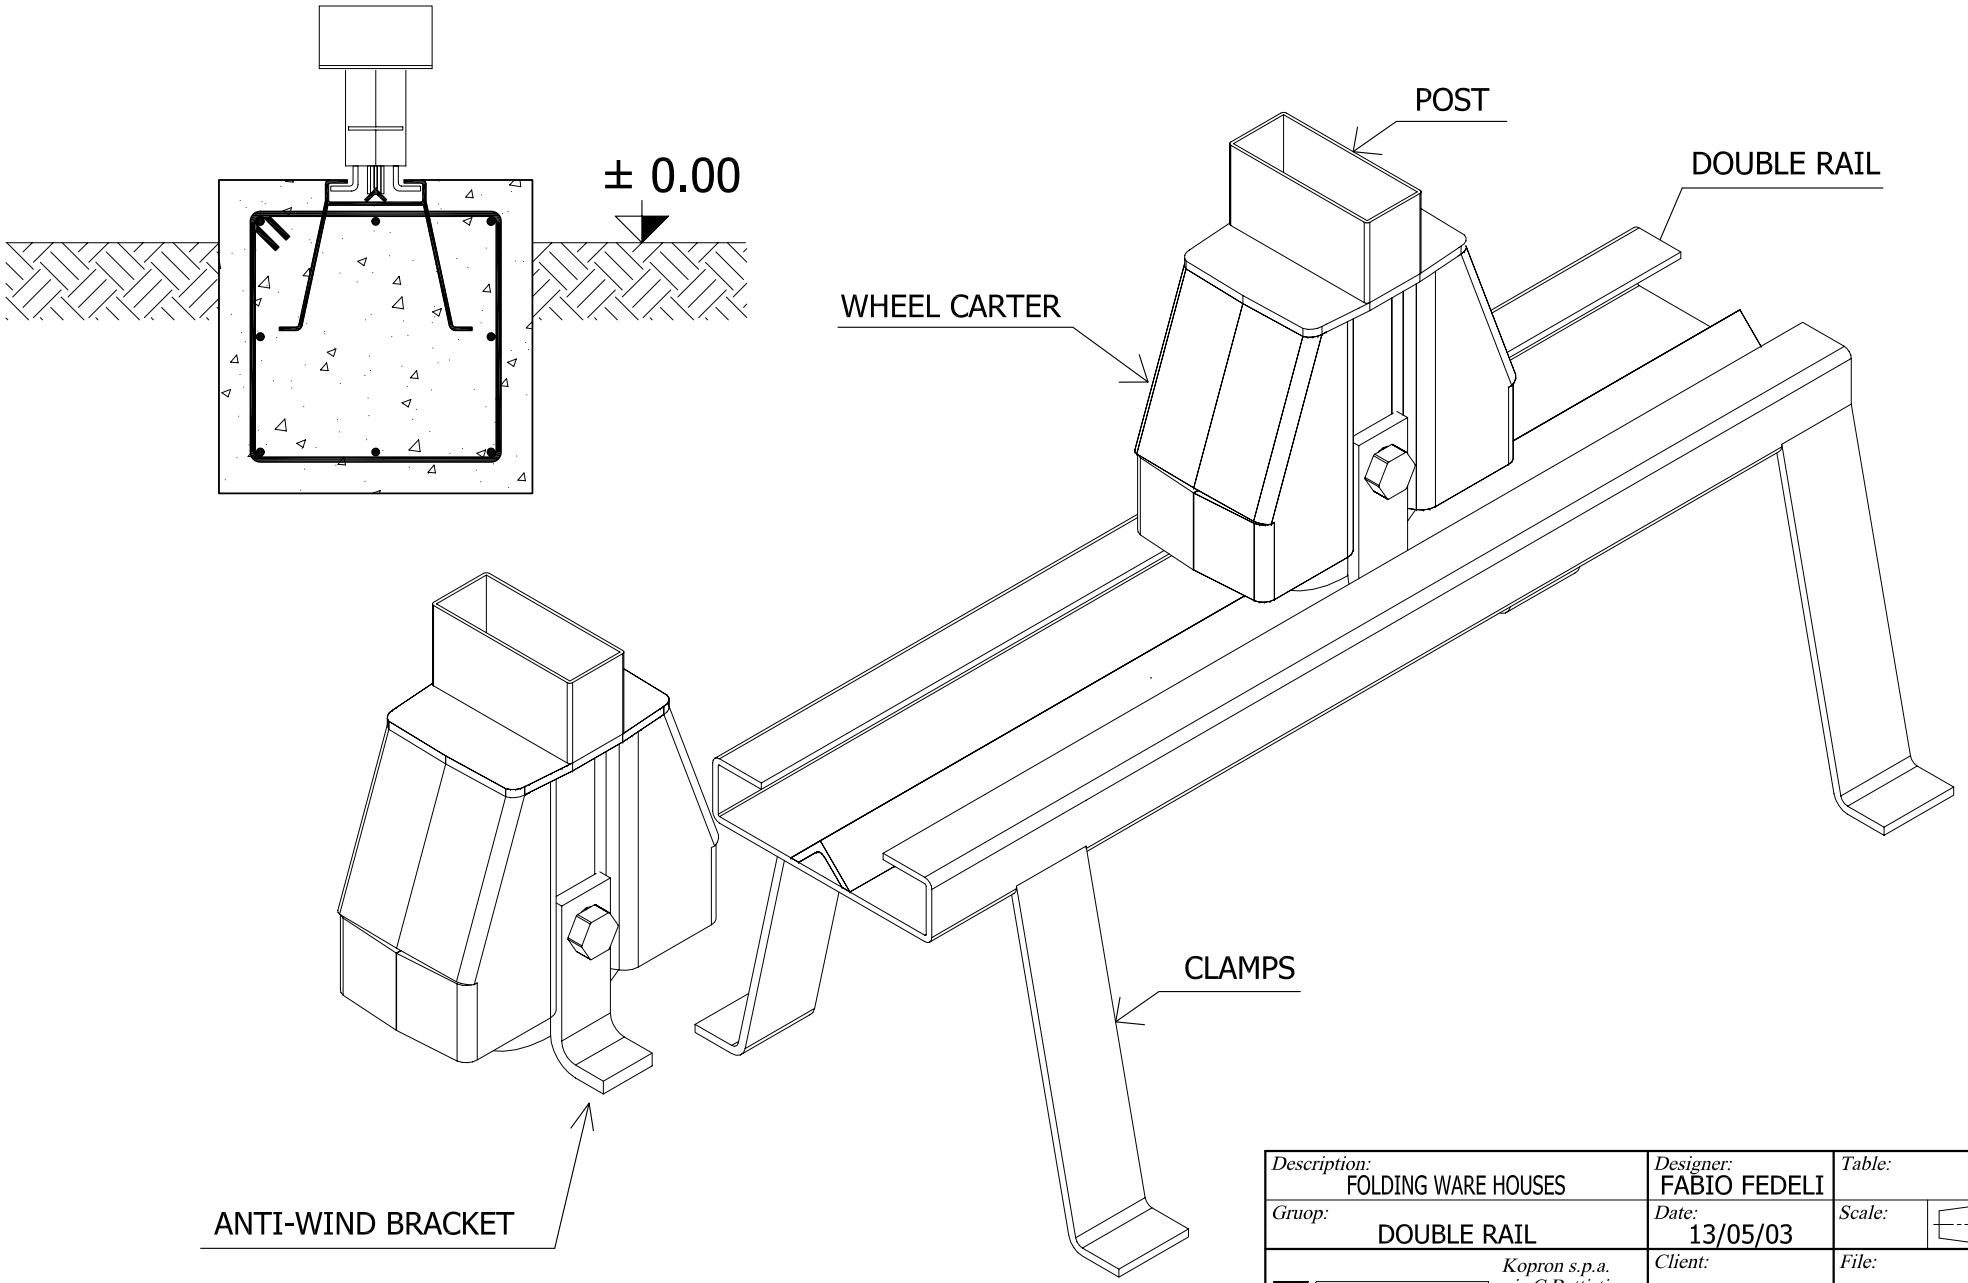


Description: FOLDING WARE HOUSES	*Designer:* FABIO FEDELI	*Table:*
Gruop: DOUBLE RAIL	*Date:* 13/05/03	*Scale:*
KOPRON *Kopron s.p.a. via C.Battisti 20061 Carugate Milano - ITALIA*	*Client:*	*File:*
	N° Order:	*N° Drawing:*

Tunnels Retrattili
Folding warehouses

Binario con zanche
Track with clamps

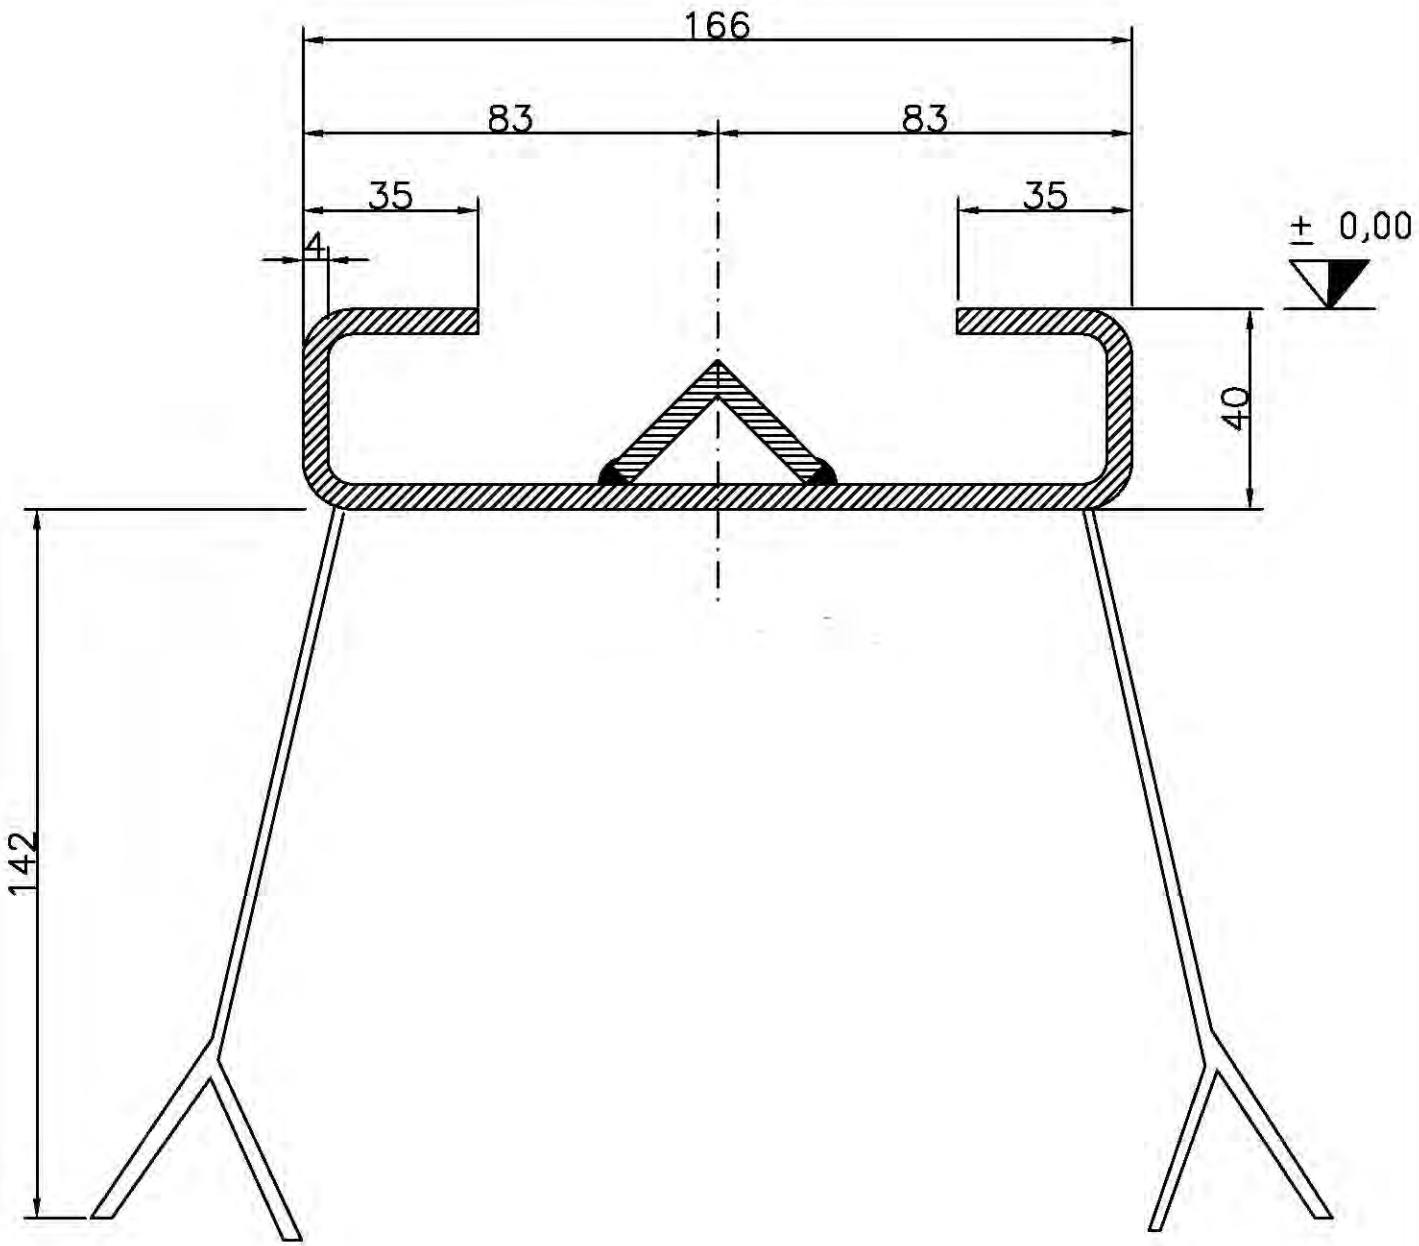

KOPRON

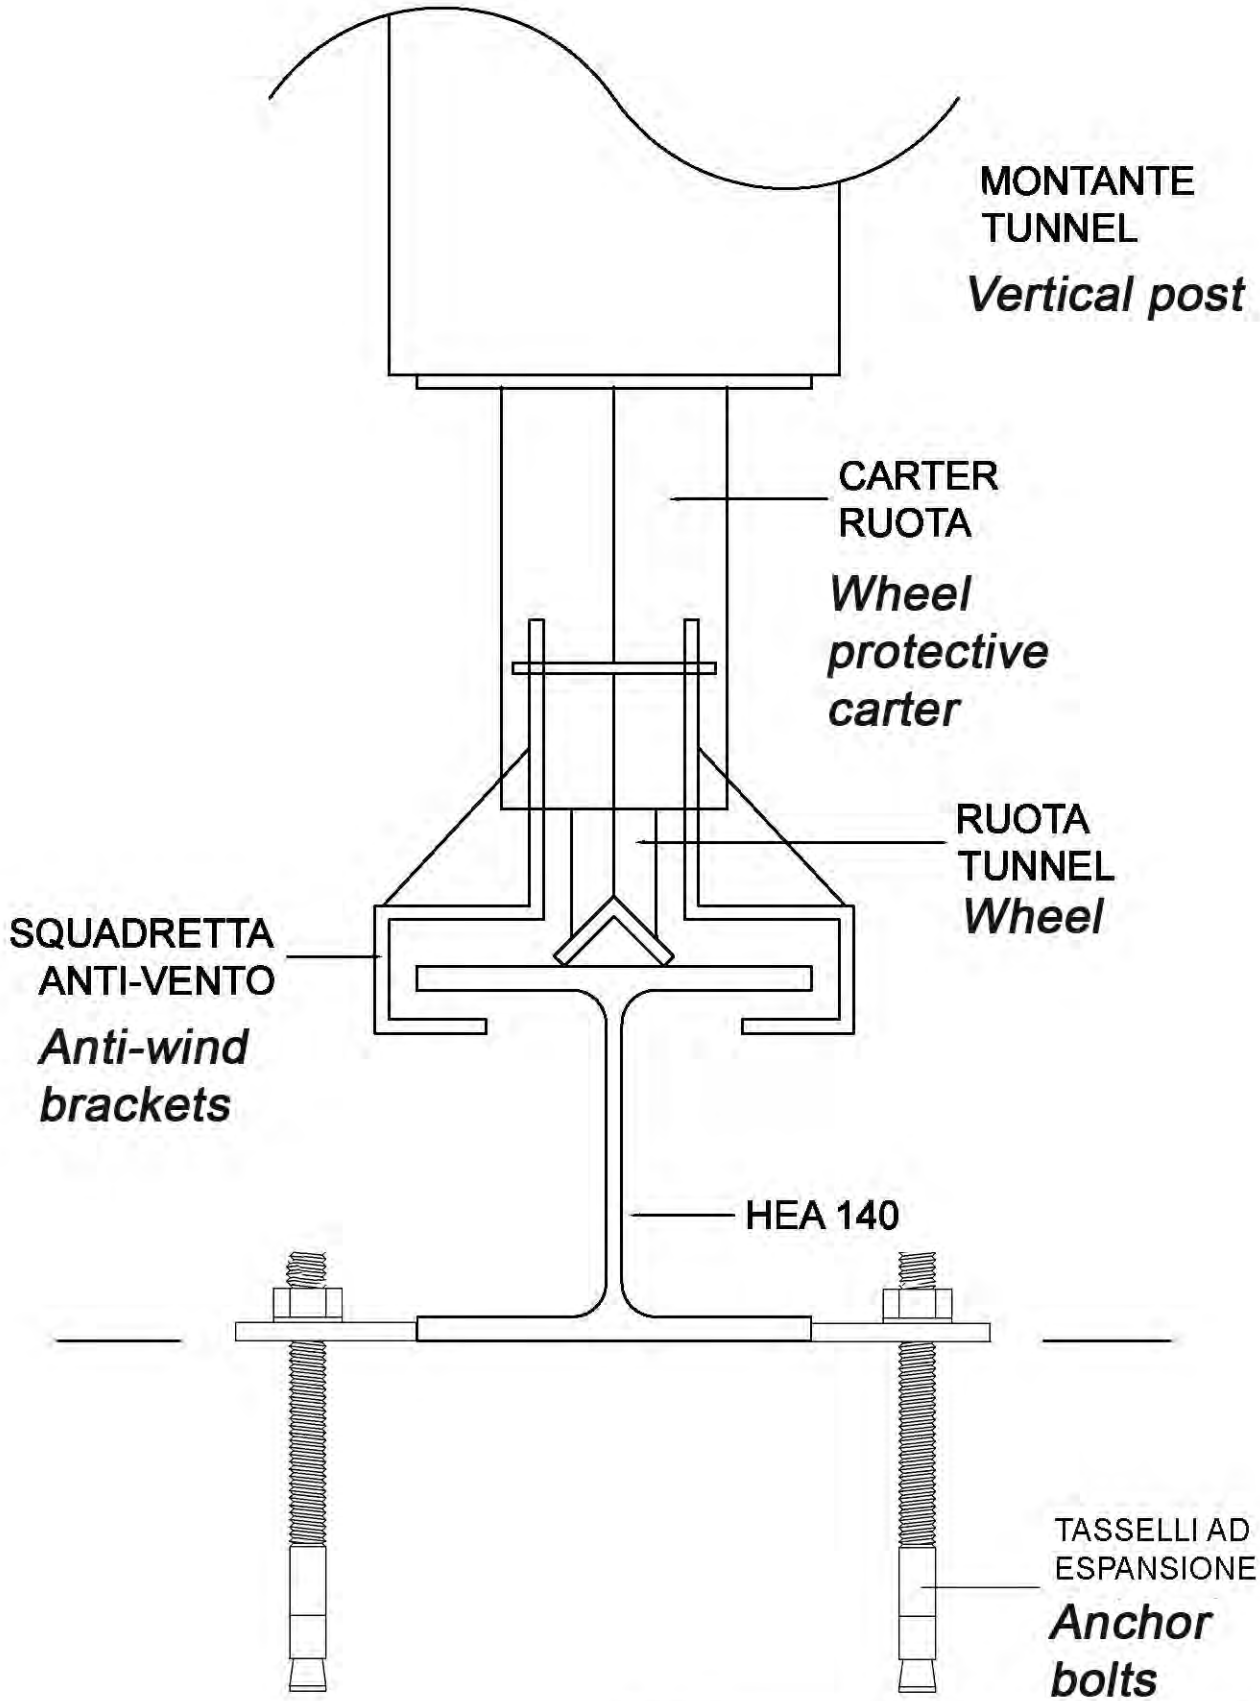

COSTUMER		ORDER NUMBER	JOB NUMBER
DESCRIPTION BINARIO DI SCORRIMENTO SU TRAVE HEA140 *Special track on beam*			Material Code
DATE	DRAFTSMAN Luca Rossini	TOLERANCE ±0.1 [mm]	SCALE	DRAWING NUMBER 00 A

logistic solutions

KOPRON

Kopron s.p.a. Via 1 Maggio 6/A - 20064 Gorgonzola (MI) Tel. 02/921521 Fax 02/9215221 - kopron@kopron.it - www.kopron.it

La società KOPRON s.p.a. si riserva la proprietà del presente disegno con il divieto di riprodurlo o renderlo noto a terzi senza la propria autorizzazione scritta

MOD. KTF

Description permanent freestanding warehouse with n. 2 curtains

PERMANENT FREESTANDING WAREHOUSE WITH N. 2 CURTAINS offers a covered area either near the borders of the propriety or in open spaces like courtyards and large squares to stock and protect packed material of all kinds enabling loading/unloading operations under any weather condition

THE CARRYING STRUCTURE consists of arcs connected to one another by spacers all in galvanised steel with no need of maintenance.
The fixing to the ground is done with flanges directly welded to the pillars doweled in a kerb in reinforced concrete

COVERING consists of a PVC fabric, weighing 900 g/m^2, reinforced in parts mostly subject to wear and tear. It offers high resistance against atmospheric agents and guarantees very long life

COLOURS AVAILABLE can be matched as follows: - cover WHITE, LIGHT GREY, CREAM COLOUR, GREEN or SILVER GREY with side and front bands ANTHRACITE GREY or SILVER GREY cover with side and front bands RED.

WORKING TEMPERATURE: -30°C +70°C

FIRE RETARDANT: Classe 2


RESISTENCE TO FOLDING: 100.000 folding on same spot.


FIXING OF THE PVC FABRIC ON THE STRUCTURE:
In order to avoid friction and consequently the wear out of the fabric, the joint plates of edges are rounded, this also enables a better tension of the fabric. On the longest trusses the fabric is protected from wear a tear thanks to a double layer of PVC in those points where friction is more frequent. The fabric is anchored to the steel structure by means of welded plates with double steel rings and belts with a breaking strength up to 350kgs

THE FRONTAL AND REAR HEAD are shut in the upper part with a fixed PVC cover anchored to the structure by means of a screwed-on glass-fiber reinforced plastic profile; the lower part can eventually be shut by two half curtains (opened from the center) which slide on an above track through carriages with double ball bearings. They are reinforced by means of metal vertical tubes inserted in pockets created along the curtain about every meter. At the end of the tubes there are locks which are anchored to the ground allowing or a partial opening of the curtain or to block it completely. As an alternative to curtains you can choose among the different types of industrial closing systems such as PVC fast-closing doors or folding, sliding and sectional doors

WARRANTY: Ten years for the galvanised steel structure
Six years for the PVC cover

CONSTRUCTION OF THE STRUCTURE : is carried out according to regulations in force

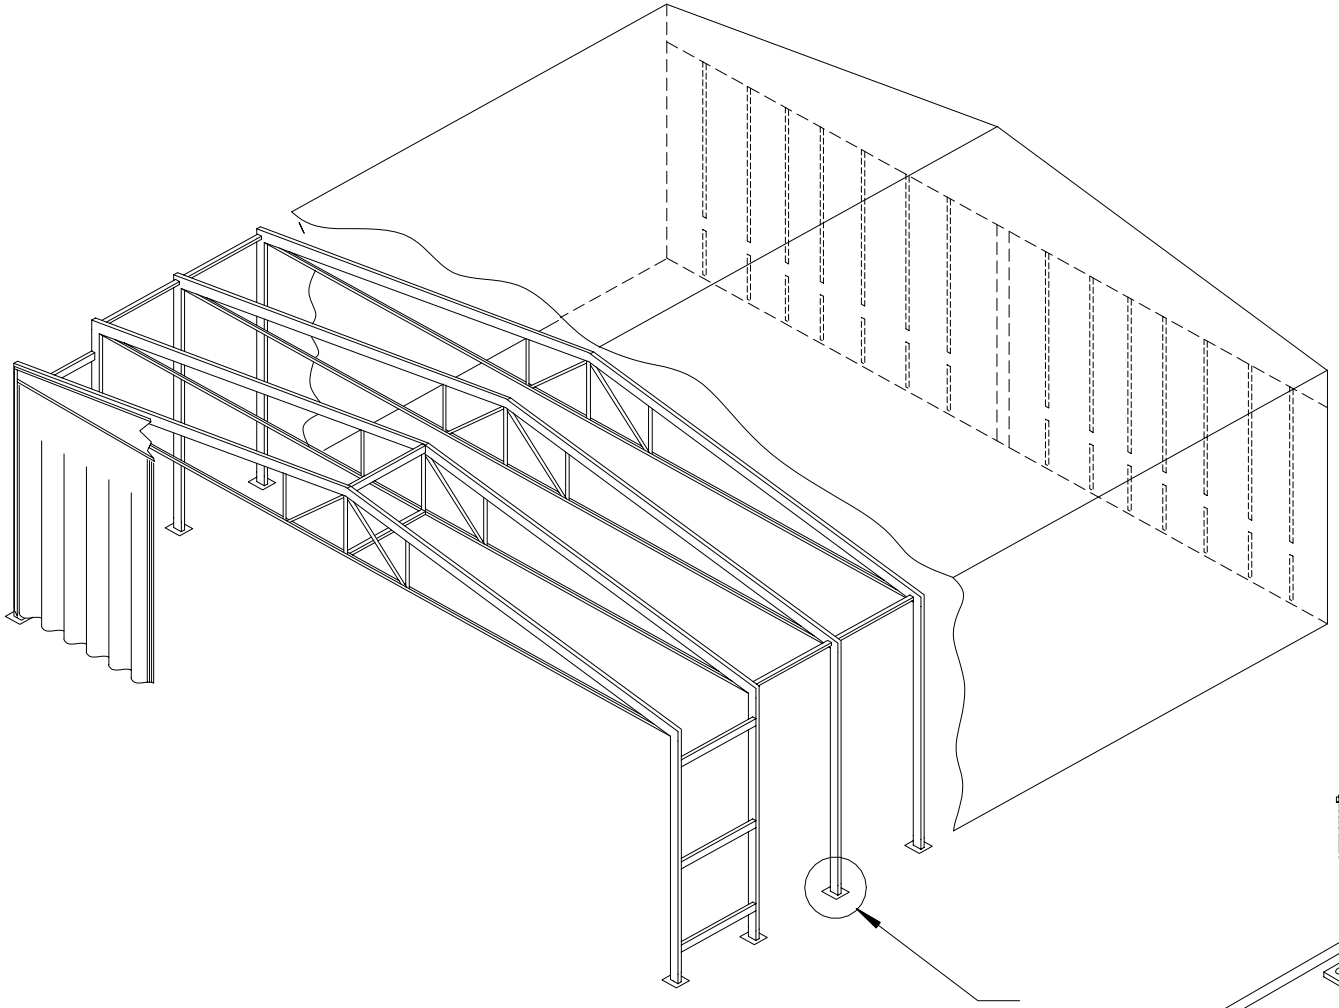

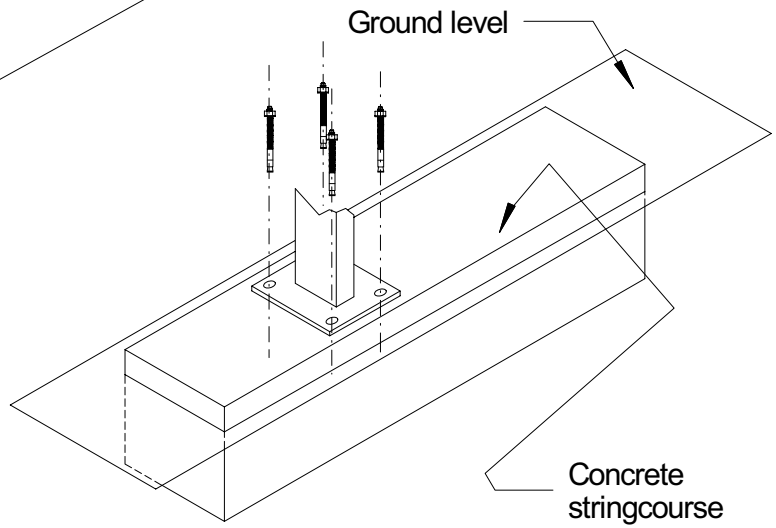

KOPRON

Re: Fixed Freestanding Tunnel
- Mod. KTF -
ground posts fixation

MOD. A/CURTAIN/

Description opening curtain


THE KOPRON OPENING CURTAIN enables a quick shutting of any place even of big size such as roofs either in metal, reinforced concrete or masonry, structures for agriculture and airports, etc..; it creates protected areas from weather conditions or rooms near production and stocking areas.
It consists of two half curtains (opened from the center) which slide on an above track through carriages with double ball bearings. They are reinforced by means of metal vertical tubes inserted in pockets created along the curtain about every meter. At the end of the tubes there are locks which are anchored to the ground allowing or a partial opening of the curtain or block it completely.


COLOURS AVAILABLE WHITE, LIGHT GREY, CREAM COLOUR, GREEN or SILVER GREY


WORKING TEMPERATURE: -30°C +70°C


FIRE RETARDANT: Classe 2


RESISTENCE TO FOLDING: 100.000 folding on same spot.

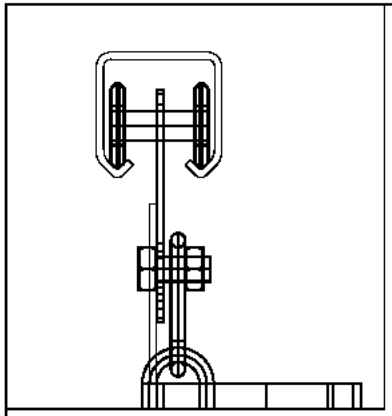


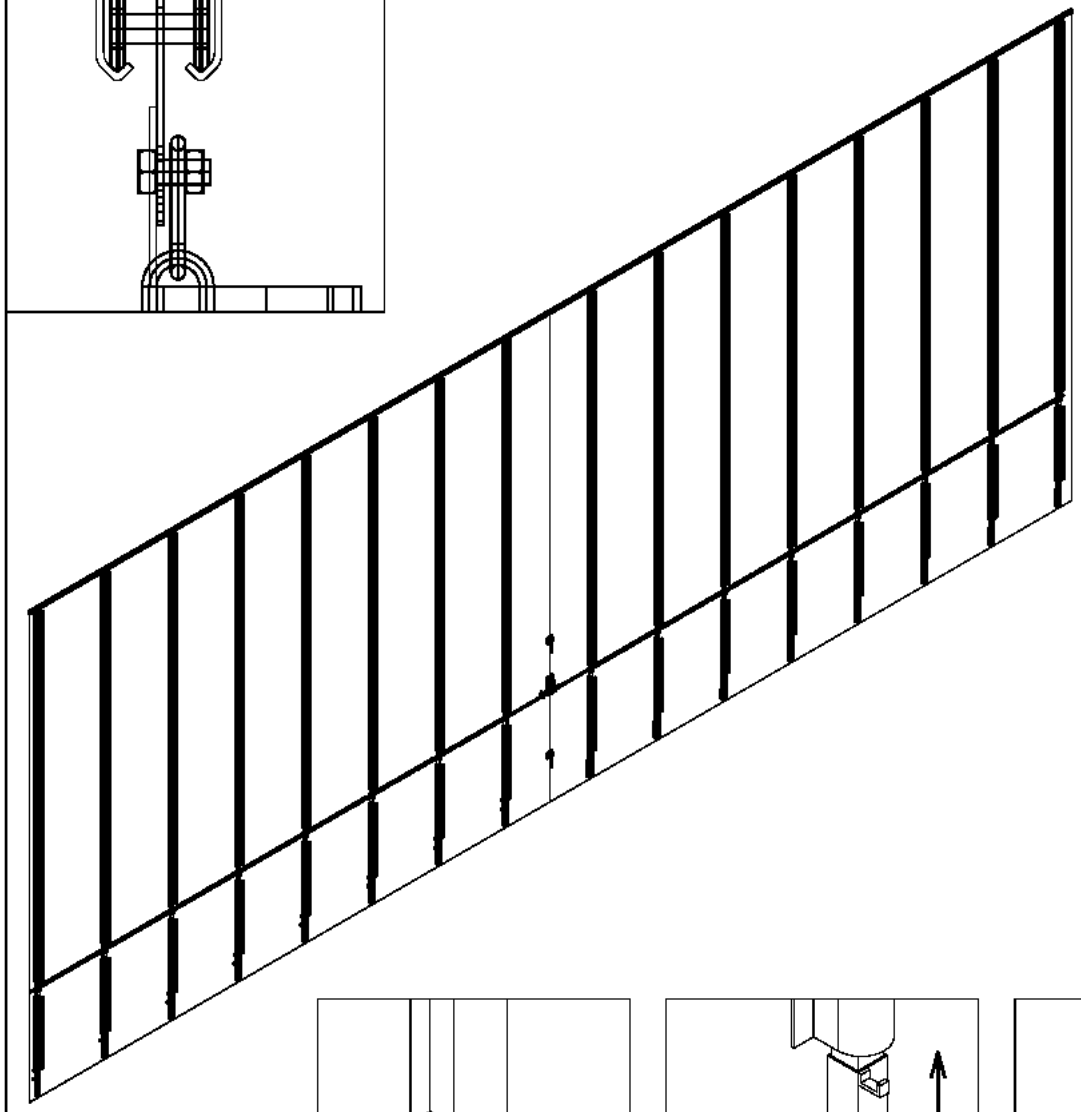


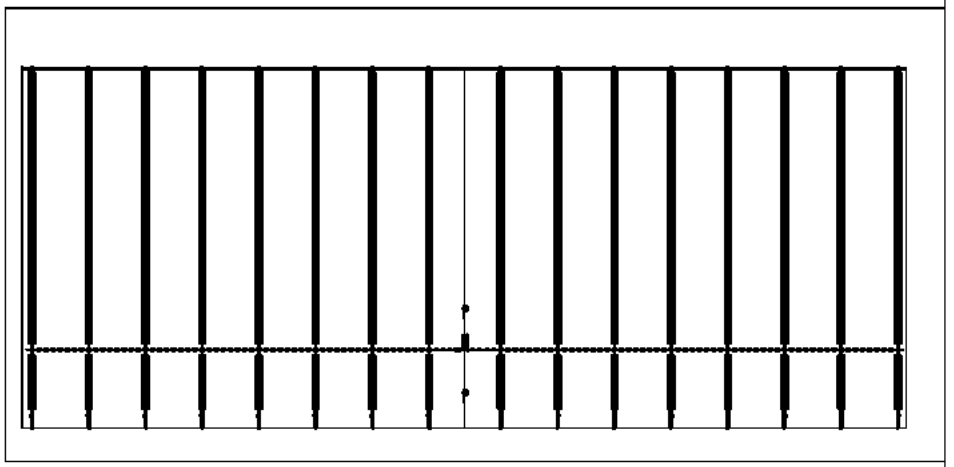


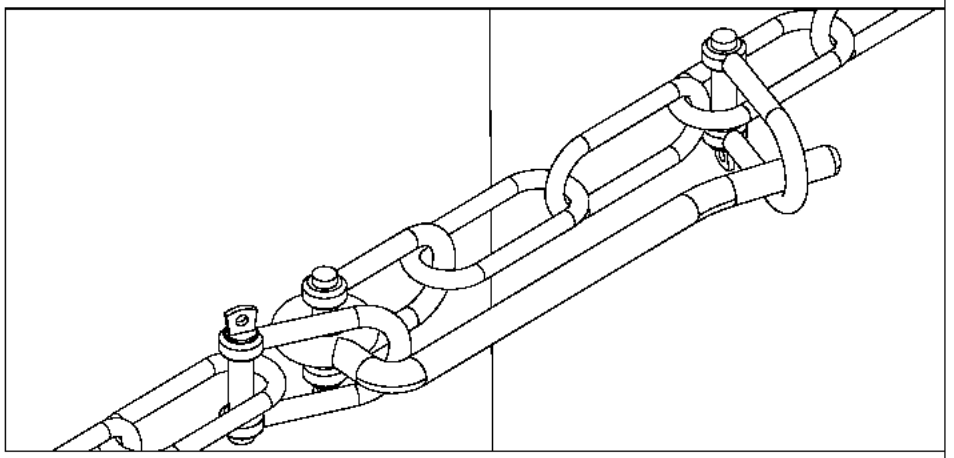

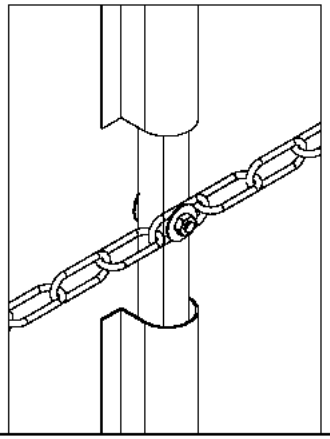

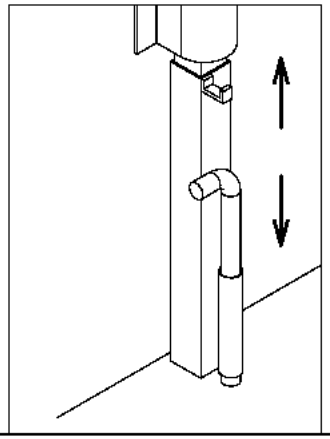

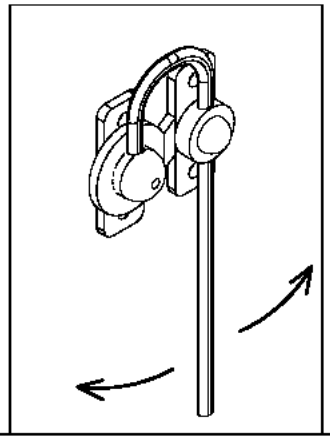

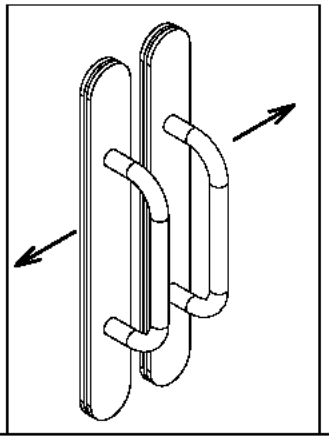

Fixed - folding warehouses
Sliding curtains - details

KOPRON

Kopron s.p.a.
via C.Battisti
20061 Carugate
Milano - ITALIA

FIXED – FOLDING WAREHOUSES

Main optionals:

- Sliding PVC curtains
- Different kind of doors
- Pedestrian security door
- Motorisation
- Transparent sectors
- Double roof
- Ventilation holes
- Roof in anti-dampness pvc
- Colours assy
- Company logo

PVC FABRIC - Data sheet

PRODUCT			
H-8510			
BASE FABRIC		DIN 60001	PES
YARN	dtex	DIN 53830	1100
WEAVE		DIN 61101	cloth 1/1
TYPE OF COATING			PVC
TOTAL WEIGHT	g/m^2	DIN 53352	750
TENSILE STRENGHT	warp/weft N/50 mm	DIN 53354	3000/2800
TEAR STRENGTH	warp / weft N	DIN 53363	300/300
ADHESION	N/cm	Complan norms	20
COLD RESISTANCE	°C	DIN 53361	-25
HEAT RESISTANCE	°C	Complan norms	70
LIGHT-FASTNESS		DIN 54004	> 6
FLAME RETARDANCY			Cl. II, DIN 4102 B1, M2
FINISH			fungicide treatment

Colours

The range of the colours for this line of production is the following:

White	Grey c	Cream	Green	Red	Silver	Anthracite
RAL 9010	RAL 7035	PAN	RAL 6026	RAL 3002	RAL 9006	RAL 7016


The colours Silver* and Anthracite are realized expressly for Kopron and we have to take care of the fact that they are not transparent.

Anthracite will be the reference colour for the front and the back (see picture 1).

* The **Silver** cover will be **light grey** on the inside.



Herewith the combinations:

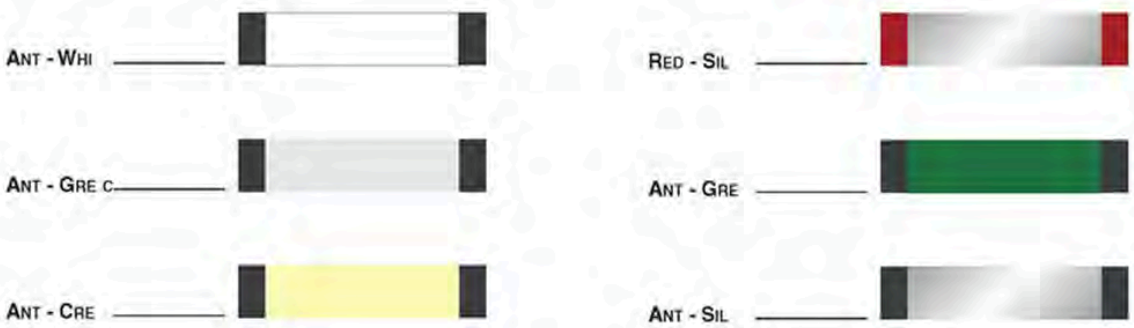

KOPRON SpA
Sede legale e operativa:
Via I Maggio sn - 20064 Gorgonzola (MI) Italy
P.IVA 00800570962
C.F. e n° iscriz. Registro Imprese MI: 05057480153
t +39 02 92152.1 - f +39 02 92152.921
kopron@kopron.com - www.kopron.com

KT FOLDING FREESTANDING PVC WAREHOUSE

DECLARATION

Hereby we declare that the steel structure in question has been manufactured according to the provisions of the regulations in force and in particular:

- Norme tecniche per le costruzioni D.M. 14.01.2008 (technical regulations which defines the principles for the project, execution, and the final test, concerning the performances in mechanical resistance and stability, also in case of fire and durability)

- Circolare esplicativa 617 02.02.2009 (Instructions for the application of the technical for the constructions dated 14.01.2008)

Kopron Spa

KOPRON SpA
Sede legale e operativa:
Via I Maggio sn - 20064 Gorgonzola (MI) Italy
P.IVA 00800570962
C.F. e n° iscriz. Registro Imprese MI: 05057480153
t +39 02 92152.1 - **f** +39 02 92152.921
kopron@kopron.com - www.kopron.com

WAREHOUSES GENERAL GUARANTEE CONDITIONS

- GUARANTEE FOR PVC FABRIC = 6 years and has value for:

  - Loss of impermeability
  - Anomalous aging
  - Insufficient self-estinguishness
  - Anomalous mildew presence
  - Defects of the product

  Guarantee duration:
  - 1° year = 100 %
  - 2° year = 90%
  - 3° year = 80%
  - 4° year = 70%
  - 5° year = 60%
  - 6° year = 50%

- GUARANTEE FOR STEEL STRUCTURE

  - Defects of the product

  The guarantee is subordinated to a correct maintenance and use
  Guarantee duration: 10 years

Whichever legal controversy will be under Italian law.