
# NIHVA DOCK LEVELLER



NIHVA USP :-

- Our dock levellers can be customized to fit various truck heights, load capacities, and specific warehouse requirements.
- Ensure smooth loading and unloading for any type of transport vehicle.
- Our dock levellers are engineered for: Heavy loads & harsh conditions.
- Long-lasting performance means fewer maintenance hassles.
- Our hydraulic power ramp dock levellers ensure: Minimal downtime & Maximum productivity
- Easy installation process.
- Minimal upkeep, allowing you to focus on core operations.



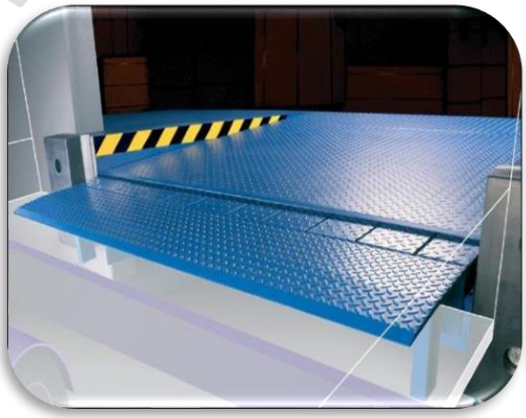



+91 2066 3040 33
+91 85 51091 333
sales@nihva.com
www.nihva.com
www.shivaah.com

# Technical Specifications for NIHVA Make Dock Leveller – 6 Ton

| Sr. No. | Description | Specifications |
|---|---|---|
| 1 | Capacity | Capacity is 6 Ton and Point Load is 2 Ton |
| 2 | Dock operation mode | AC power pack hydraulically operated |
| 3 | Lip operation mode | Hydraulic |
| 4 | Operation control | Through panel |
| 5 | Loading platform height from road | 1250mm |
| 6 | Travel above & below dock level | (+) 300 / (-) 150 mm |
| 7 | Platform Size (W x L) | 2250 mm x 2250 mm |
| 8 | Lip size (W x L ) | 2250 x 400 mm |
| 9 | Shut Height | 480 mm |
| 10 | Working length | 2650 mm |
| 11 | Overall Length | 2250mm x2250mm + Lip Length (400mm) |
| 12 | Maximum slope can be achieved | 10% |
| 13 | Clear Pit dimensions (W x L x D) | (W) 2300mm x (L) 2300 mm x (D) 485 mm |
| 14 | Hydraulic power pack | Standard |
| 15 | Driver type | Direct by electric Motor |
| 16 | Motor Ratings | 1 H.P |
| 17 | Pump design flow | 2.5 LPM |
| 18 | Pump pressure | 120 bar Operating 200 bar Max |
| 19 | Safety valve set pressure | 120 Kg/cm² |
| 20 | Pump Type | Gear |
| 21 | Volume of oil receiver | 7 Lit |
| 22 | No Of Deck cylinder | 2 No |
| 23 | Lip Cylinder | 1 No |
| 24 | Dock Bumper | Included |

NIHVA Technologies pvt.ltd