
***Hermetic and semi hermetic sliding doors***



Besam Hermetic sliding door is specially designed for use in clean room environments such as operating theatres, pharmaceutical production facilities, food preparation facilities, laboratories, and other areas where clean, hygienic, well-sealing doors are required.

Each door is programmed to comply with the customer's specific requirements during installation. The Hermetic sliding door is supplied as a system including the operator, doors and doorframe, and is easy to install for both new construction and retrofit applications.

- Operator is highly suitable for the heaviest duty applications
- Electronic control unit with plug-in connections and power supply

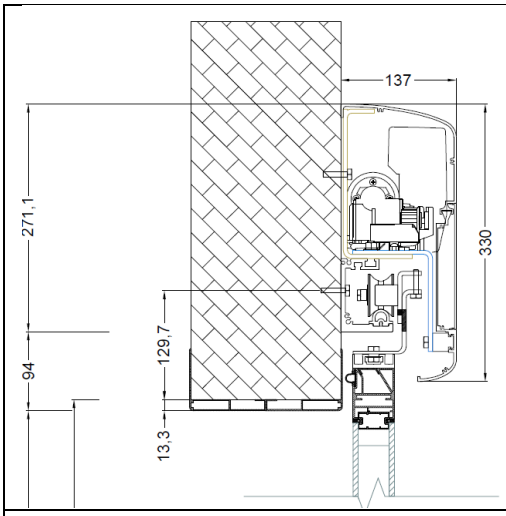


**Models Operation**
- Hermetic-R Single slide, right hand
- Hermetic-L Single slide, left hand

**Standard equipment**
Operator including:
- Electronic control unit with plug-in connections and power supply

**Accessories and Options**
- Cover:
- Clear anodized aluminium (other anodizing optional)
- Paint finished in colour according to RAL chart
- Programme selectors
- Convenience battery
- Emergency button
- Besam approach and presence sensor
- Presence detection photocells
- Electromechanical locking device
- Manual open/close impulse
- Full (bed) and partial (nurse) opening
- Interlocking between operators
- Key switch
- Limit switch for indication of closed door

- **Besam Automatic Door systems:**
- Door leaf in optional laminates and in stainless steel
- Reveal plate system consisting of a lining, faced with laminate in optional colours and materials designed to cloak the door opening on both sides
- Window in the door leaf
- Mechanical cylinder lock
- Earthing of door leaf and frame
- Handle on one side only - outside or inside

**Technical specifications**
- Power supply: 120 V AC -10% to 240 V AC +10%; 50/60 Hz
- Power consumption: max. 250 W
- Recommended max. door weight: 200 kg
- Clear opening: 800 – 2000 mm
- Opening and closing speed: variable up to 0.7 m/s
- Hold open time: 0 – 60 s
- Ambient temperature: -20°C to +50°C
- Relative humidity (non-condensing): 5% to 85%