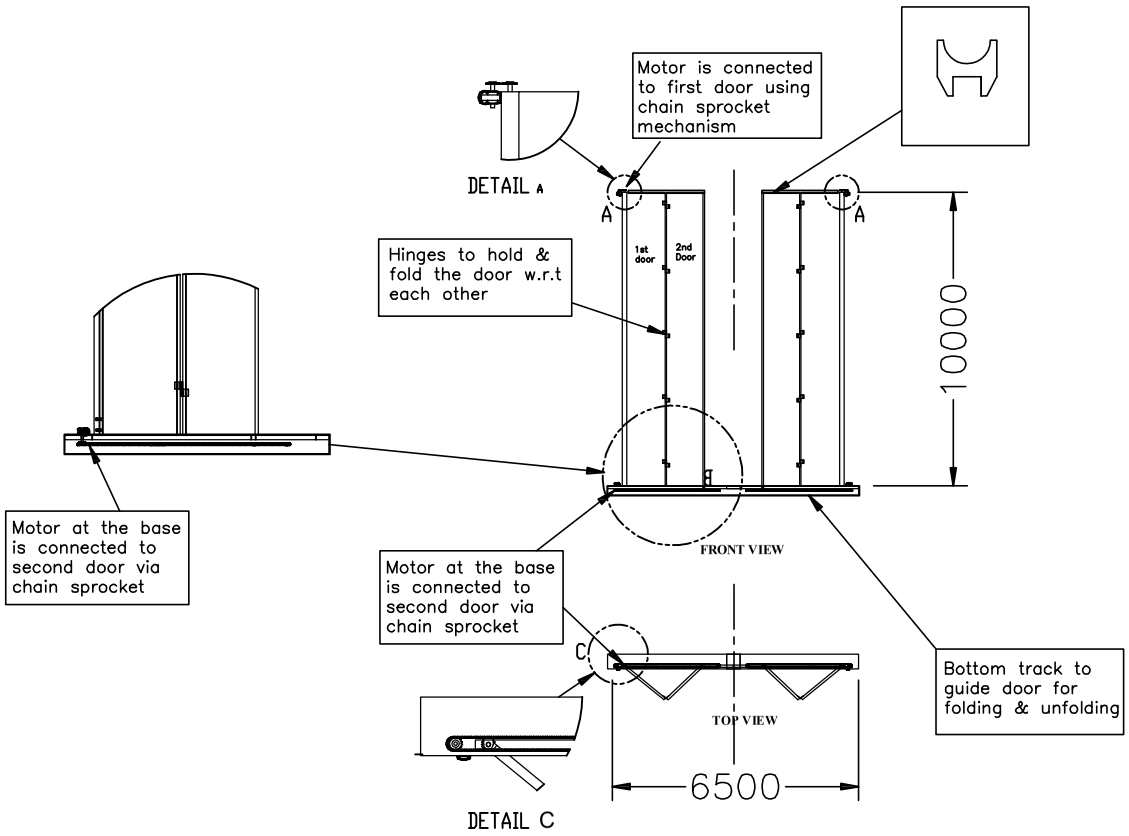


TECHNICAL DETAILS

1. Automatic Motorised Bifold doors. Size of bifold Doors 6500 mm (W) x 10000 mm (H)
2. Heavy Duty Hardened hinges is used between two bifold doors for easy folding.
3. Heavy duty thrust Bearing are used inside main hinges for smooth closing & opening operation of bifold doors.
4. Motorise Secure Locking Mechanism
5. Inbuilt Failproof safety interlocks for safe & smooth operation.
6. 4 nos 1hp motors are used for automatic closing & opening bifold doors.
7. high strength Composite rollers for smooth sliding of doors inside guide at the bottom
8. All weather U–profile seal on the top of doors to make a positive seal when MEGADOOR is closed.

DESIGN & OPERATION

1.Two doors are connected to each oter via hinges so that they can be folded w.r.t each other.

2. motors are provided on top & bottom for smooth operation .

3. top motor is connected to 1st door hinge via chain sprocket mechanism.

4.Bottom motor is connectes to second door using chain sprocket mechanism.

5.Bottom chain sprocket mechanism is embded in bottom track.

6. When swtched on both the motor operates at the same time. therefore generating equal forces through out the door structure.

Rev No.	Revision	Date	Revised By

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE:- AUTOMATIC SLIDING FOLDING DOOR

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	SIGN
DRAWN	G.P	23-11-2021	
CHECK	A.K	23-11-2021	
APPRD.	V.T	23-11-2021	

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

CLIENT - BAETTR

LOCATION - CHENNAI

PRODUCT - AUTOMATIC SLIDING FOLDING DOOR

DWG NO:-NIHVA/21-22/CLT/0266 REV- 0

SHEET: 01 OF 01