

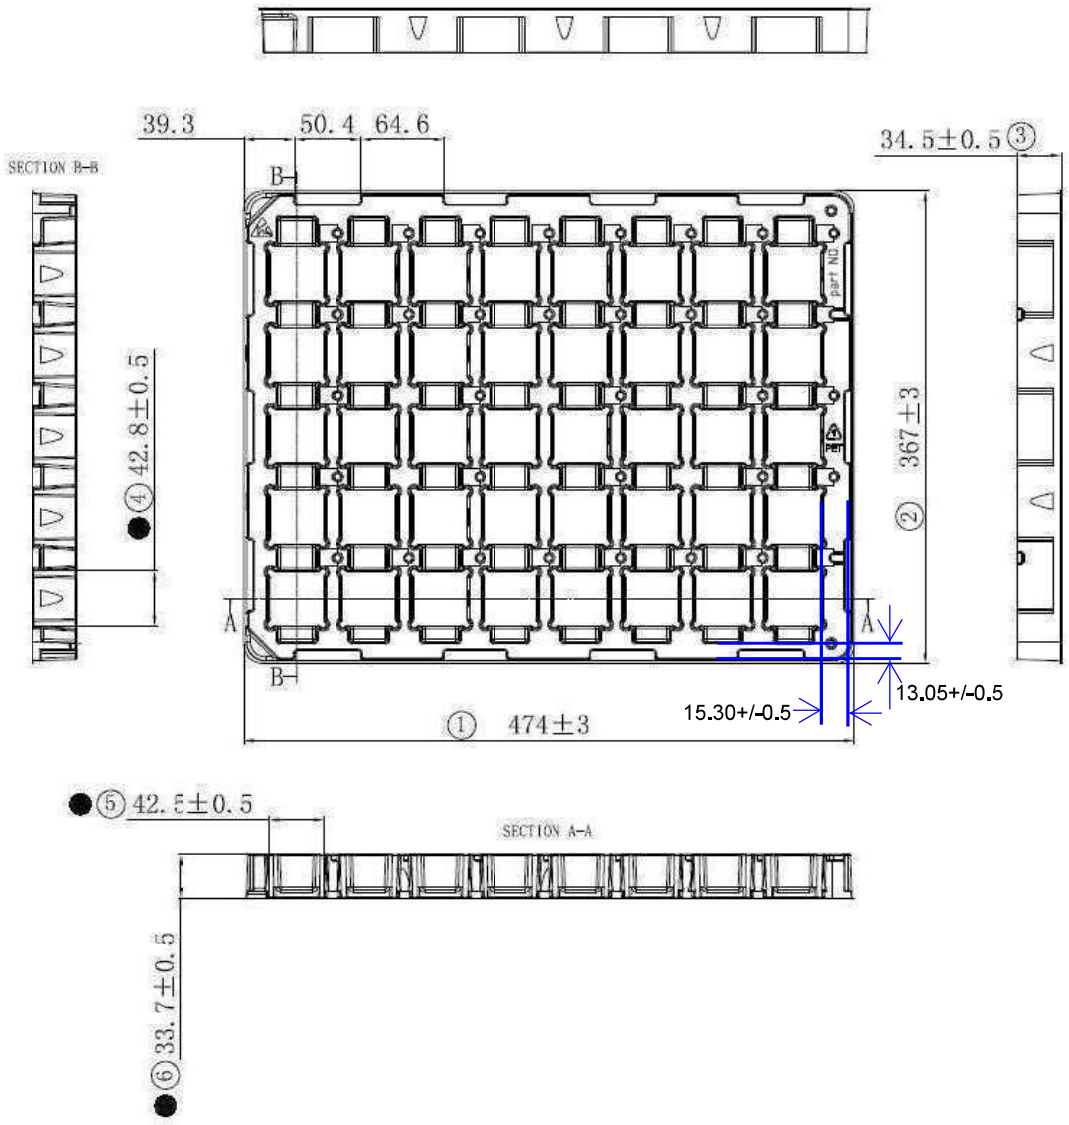



NOTES:


1. MATERIAL: NON COATING, RAW STATIC DISSIPATIVE PET .
   COLOR: TRANSPARENT
   RAW MATERIAL THICKNESS: 1.0+/-0.03MM (BEFORE MOLDING)
   WEIGHT OF TRAY: 200+/-10 G.
   SURFACE RESISTANCE: >=10^4 AND < 10^9 OHMS
   FRICTIONAL STATIC VOLTAGE: < 100 V
   ALL DIMENSIONS ARE IN MILLIMETER.
   UNLESS OTHER SPECIFY, TOLERANCE: +/- 0.5MM
   ● MEANS CRITICAL DIMENSIONS
2. ALL SURFACE MUST BE CLEAN, NO GLUE RESIDUE, FOREIGN MATERIALS OR CONTAMINATION.
3. REFER TO 3D DRAWING FOR MORE DETAILS OF EACH CAVITY.
4. DESIGN MUST BE MULTI LAYERS STACKABLE.
5. FOR HAZARDOUS SUBSTANCES ACCEPTANCE LEVEL. AND TESTING METHOD REFER TO 970-006043-0000 ITEM7 .
6. COMPLY WITH 920-000120-0000 (SUPPLIER PACKAGING STANDARDS).

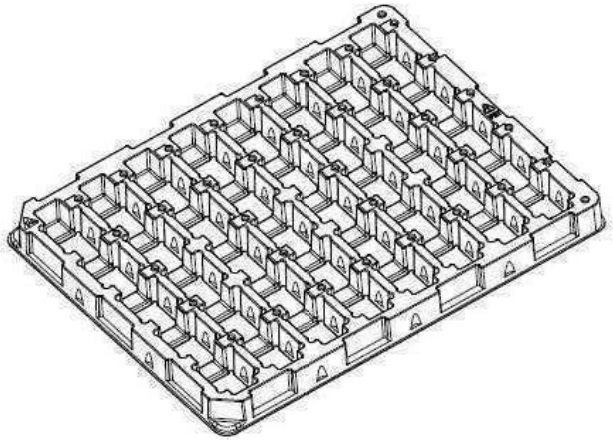


Customer	ABC	**Part Name**	Z1 Housing Tray
Part No	PKTRY10117	**Texture**	PET, Transparent Antistatic
Date	07/26/2020	**Version**	A
Made By	Partrick	**Approved By**	Right
E2		**Unit**	\
		Scale	\
		43-BU50-BC-E2-ASLY-00024	

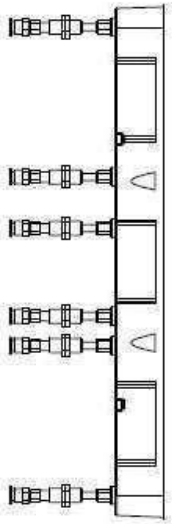

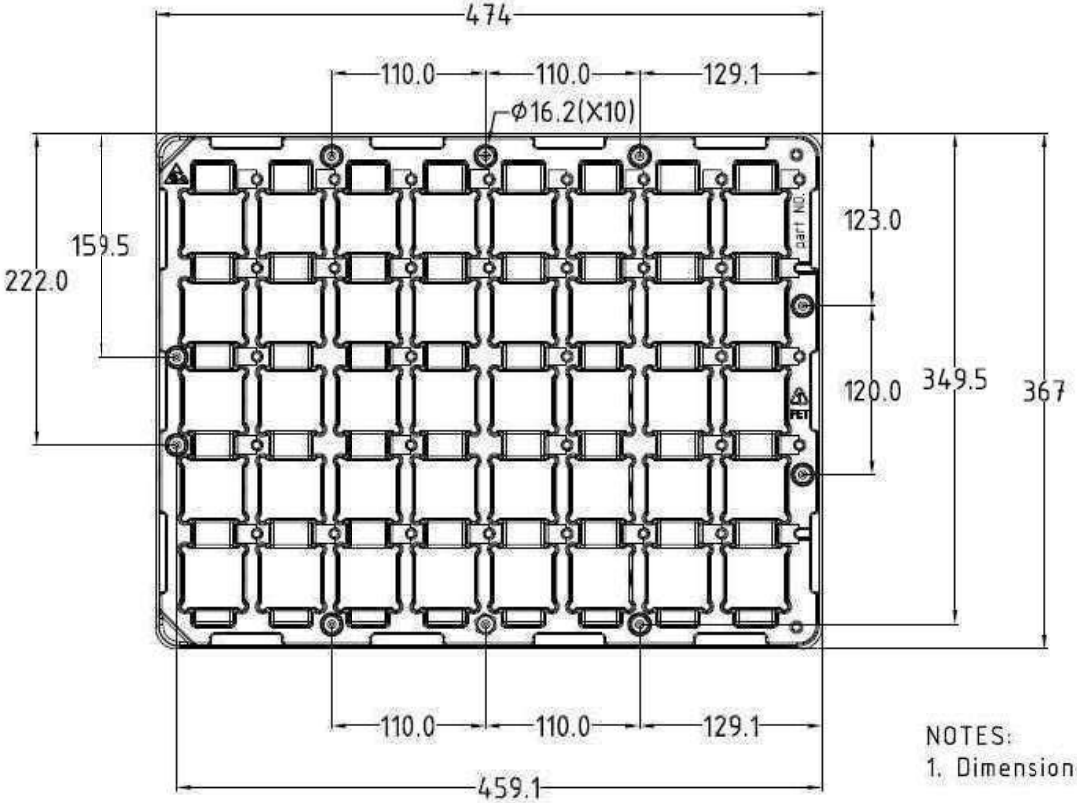

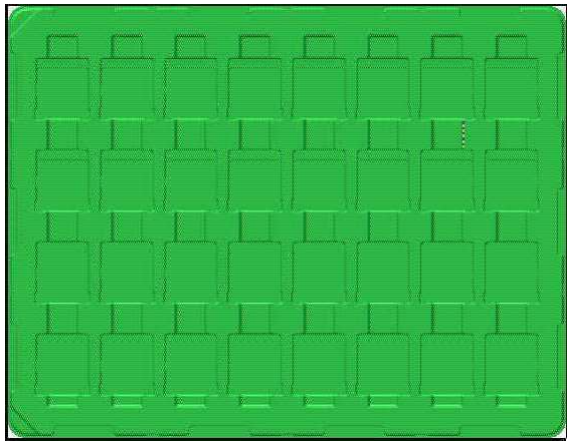

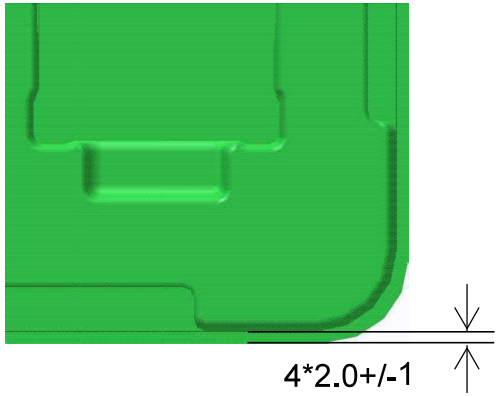

NOTES:
1. Dimensional tolerance: ± 1 MM.

2. The area with '◎' is sucker location of automation equipment, needs to keep them clear & flat without any symbol.

Customer	ABC		
Part No.	PKTRY10117AP		
Part Name	Z1 Housing Tray		
Texture	PET, Transparent Antistatic		
Date	07/26/2020	**Version**	A
Made by	Patrick	**Approved**	Right