
DATASHEET FOR DOCK LEVELER

Sr. No	Parameter	Remark
1	Required Capacity	06 Ton
2	Leveler operation mode	AC power pack hydraulically operated
3	Lip operation mode	hydraulic
4	Operation control	by push buttons and control panel
5	Loading platform height from roadLevel	1150 mm
6	Travel above & below dock level	600 mm
7	Platform Size (W x L)	2000 mm x 5500 mm
8	Lip size (W x L)	2000 mm x 630 mm
9	Maximum slope can be achieved	6 Degree

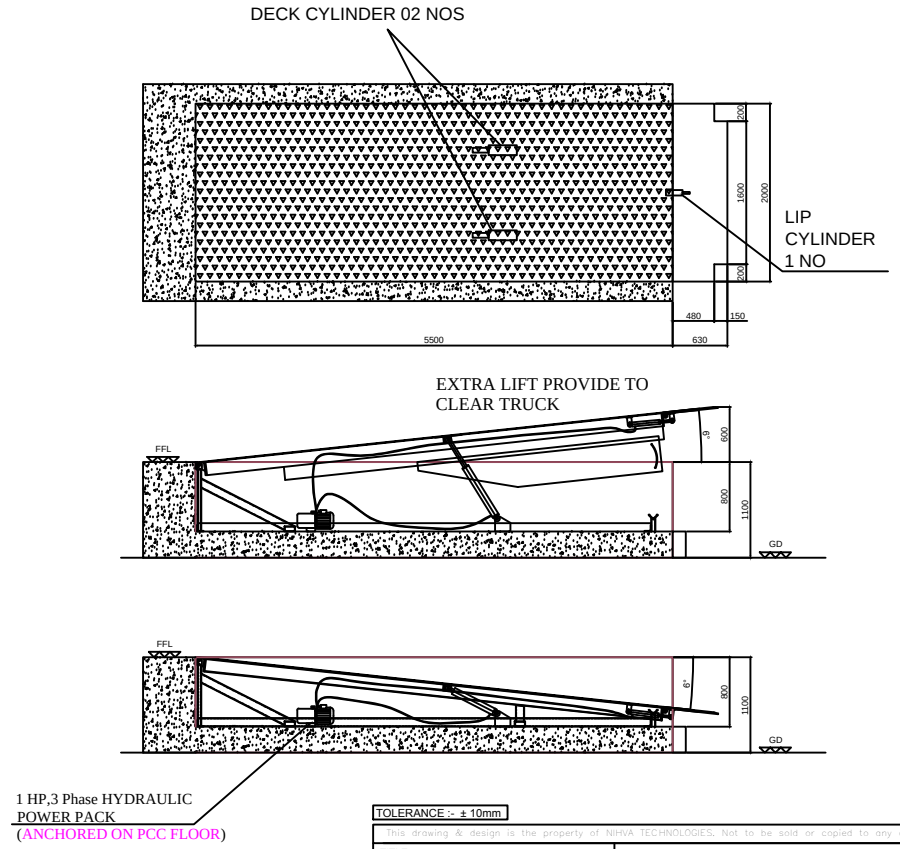

NOTE: -
1. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM.
2. PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER (6 TON) CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
3. CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2000	5500	800	630	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	5500	805	

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
DOCK LEVELER - 6 TON

	NAME	SIGN	DATE
DRAWN	P.A		15.01.2020
CHECK	G.J		15.01.2020
APPRD.			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

CLIENT - L & T HYDRO CARBON
PROJECT - IOCL
SITE LOCATION - ODISHA
DWG. NO. : NIHVA/19-20/0212 REV- R00
SCALE: NTS WT: SHEET: 01 OF 01