Date: 02/07/21

INDEX

Sr no	Machine Name
1	Storage tank (5000ltr)
2	Mixing tank (5000ltr)
3	Storage tank (100ltr)
4	Turn table 36"
5	Automatic Airjet 6 head cleaning machine
6	Automatic six head filling machine
7	Automatic Pick & place capping machine
8	Automatic four head capping machine
9	Shrink Table
10	S- Conveyor
11	Pick & Place Unit
12	Case Erector
13	Driver Roller Conveyor
14	Case Tapping Machine
15	Idle Roller Conveyor

Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019

M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com

1.Turn Table 36”

We offer Turn Table that is fabricated using premium quality material and is efficient in working. Turn Table System for transfer or movement of various type of Bottles, Vials, Jars on any Liquid Filling Line. Turn Table can be used with any machine for collection or feeding of products and also used to change the total line direction for “L” shape or “U” shape movement of line. Turn Table is available in various diameter of 600, 750, 900 or 1200 mm. the range is also custom designed as required by the clients.

Turn Table can be supplied with Standard Variable Speed Pulley Drive or A.C. Variable Frequency Drive System for smoother Start and Stop operation for unstable products. Turn Table can also be made from

Stainless Steel Frame and also with Fully Stainless-Steel Top Plate on request.



Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019

M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com

Turn Table is also ideal for use in any automatic high-speed liquid or powder line and turn table can also works as a buffer between two machines. If any of machines stop during the online operation, Turn Table can collect the outfeed product from machine or similarly can feed the products to machine without interrupting the complete line.

SALIENT FEATURE: -

- All exposed parts are of S.S. to prevent rusting.
- Reduction in gear ensure jerk free & noise less performance
- Allows absolute cleanliness even inside.

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Gear Motor	Bonfiglioli
2	A.C. Variable Frequency Drive	Danfoss Make
3	Direction	Left to Right
4	Power	220 Volts, I Phase (2 Wire System) 50 Cycle/Second
5	Motor	0.5 HP
6	Output	100 to 120 Product /Minute (Depending upon the production speed)

2.Air Jet Cleaning Machines

Our range of products include automatic four head air jet cleaning machine, vertical bottle air jet cleaning machine and linear tunnel type bottle air jet cleaning machine.



With our vast experience and knowledge in this field, we are engaged in manufacturing a quality assured array of **Automatic Air Jet Cleaning Machine**.

SALIENT FEATURES: -

- Positive air pressure and vacuum cleaning
- Easy operation
- Stationary SS nozzles
- Automatic loading and unloading of container
- Individual control for air pressure and vacuum cleaning
- Higher capacity blower for proper cleaning
- SS Pressure met

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Bottle Cleaning
4	Head	6 Heads
5	Model No	SPMC06
6	Output per Hour	2400 to 7200
7	Direction of Movement	Left to Right
8	Motor Power	0.5 HP/ 415 V/ 50 Hz
9	Blower Motor	0.5 HP X 2= 2HP/ 415 V/ 50 Hz
10	Cleaning Cycle	Positive air Pressure and Vacuum Cleaning
11	Working Desk Height	860- 910 mm

Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019

M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com

3.Automatic 6-Head Liquid Bottle Filling Machine

Bottles with maximum speed **of 60 to 65 Bottles per minute**. The output of Bottle Filling Machines depending on nature of Liquids, Bottle Diameter, Bottle Height, Bottle Neck Size and Fill Volume. All parts coming in contact with Liquids are made from **SS-316** Materials.
Machine construction in fully Stainless-Steel finish including machine frame structure.



Machine with Optional Turn Tables at In-feed and Out-feed with individual drives to match the speed of incoming and outgoing Bottles for smoother operation. The Automatic Four Head Volumetric Linear Liquid Bottle Filling Machine. We will provide basic machine in complete stainless-steel finish with One complete set of change parts (Syringe Set=6 Nos.) suitable for fill from 600ml. Total machine construction in S.S.-304 wherever; Contact parts is made from S.S.-316 material.

SALIENT FEATURES: -

- Suitable Bottle from 600ml.
- Output: 60-65 Bottles/Minute Depending on Filling Volume & Liquid viscosity.
- Special Type Diving Nozzle System to prevent against foaming problems especially for Pesticide Liquid.
- Nozzle Lock System to Stop Dropping Problems.
- No Bottle – No Filling System
- Built in A.C. Variable Frequency Drive system for speed control.
- Total contact parts are of S.S.-304 and other surface parts are of S.S.-304
- Manufactured with latest technology
- Synchronized two nos. A.C. drive for main motor & conveyor belt
- Automatic speed control system.
- Automatic sensor-based bottle counter system.
- Bottle stopper and holder pneumatic based.
- Rigid vibration free construction for trouble free performance $.3. Elegantly matt finished body.
- Minimum change overtime, from one size to another fill size
- Self-lubricating UHMW-PE guide profile for SS slat chain provides low friction wear surface, smooth and noiseless conveying.
- Safety guard for conveyor gear box, motor and pneumatic cylinders Inbuilt protection against over current, Voltage fluctuation, short circuit in
- S.S. conveyor belt made from the S.S.-304 [Length: 6 Feet] Adjustable Conveyor height as per customer choice to align with another line machine.
- Standard in quality & economical in price.

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Bottle Filling
4	Head	6 Heads
5	Model No	SPMC06
6	Output per Hour	60 to 65 Bottle/Minute
7	Direction of Movement	Left to Right
8	Gear Box (Conveyor + Main)	Bonfiglioli
9	Make Motor (Conveyor + Main)	Bonfiglioli
10	Cleaning Cycle	Positive air Pressure and Vacuum Cleaning
11	Working Desk Height	860 To 910 mm
12	Filling Accuracy	+/- 1 In single bottle
13	Dose Filling range	600ml
14	A.C. Variable Frequency Drive	Danfoss Make
15	Make Pneumatic Cylinder	FESTO

4.Automatic Pick & Place Inner Capping Machine

We will provide basic machine in complete stainless-steel finish with One complete set of change parts suitable for any one size Diameter of Caps & Bottle. Total machine construction in SS-304 wherever; Contact parts is made from SS-304 material. No Bottle – No Capping System Bottle Jam. Machine stop system. Built in A.C. Variable Frequency Drive system for speed control. Suitable to capping your plastic caps. Output: 60-65 Bottles/Minute (Depending On Bottle/Cap Sizes)

SALIENT FEATURES: -

- No Bottle – No Capping System.
- Machine construction is Stainless Steel Finish.
- Cap orientation auto. Start/stop system.
- In feed & Exit sat wheel with over load clutch system to avoid bottle breakage.
- Single motor synchronizes conveyor, star wheel & platform turret.
- Minimum change over time.
- Pick & place arrangement.
- Hopper can be completed dismantled for easy cleaning.
- Adjustable height conveyor belt.
- Low noise level & low power consumption.
- Standard in quality & Economical in price.

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Inner capping
4	Model No	SPMC06
5	Output per Min	60 to 65 Bottle/Minute
6	Direction of Movement	Left to Right
7	Gear Box (Conveyor + Main)	Bonfiglioli
8	Make Motor (Conveyor + Main)	Bonfiglioli
9	Working Desk Height	860 To 910 mm
10	Powder characteristics	440 Volts, III Phase

5.Automatic Four Head Capping Machine

Suitable to capping your caps output: 60-65 Bottles/Minute (Depending on Bottle/Cap Sizes) We will provide basic machine in complete stainless-steel finish with. One complete set of change parts suitable for any one size Diameter of Caps & Bottle. Total machine construction in SS-304 wherever; Contact parts is made from SS-304 material.



SALIENT FEATURES: -

- No Bottle – No Capping System.
- Machine construction is Stainless Steel Finish.
- Cap orientation auto. Start/stop system.
- In feed & Exit sat wheel with over load clutch system to avoid bottle breakage.
- Single motor synchronizes conveyor, star wheel & platform turret
- Minimum change over time. Pick & place arrangement.
- Hopper can be completed dismantled for easy cleaning.
- Adjustable height conveyor belt.
- Low noise level & low power consumption.
- Standard in quality & Economical in price.

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Bottle Capping
4	Head	4 Heads
5	Model No	SPMC06
6	Output per Hour	60 to 65 Bottle/Minute
7	Direction of Movement	Left to Right
8	Gear Box (Conveyor + Main)	Bonfiglioli
9	Make Motor (Conveyor + Main)	Bonfiglioli
10	Working Desk Height	860 To 910 mm
11	Dose Filling range	600ml
12	A.C. Variable Frequency Drive	Danfoss Make
13	Make Pneumatic Cylinder	Festo Make

6.Heating Tunnel

We are engaged in manufacturing of qualitative range of heating tunnel for various application like packaging machines. Designed with precision, these machines are widely recognized for their durability, design excellence and high performance. Available in different specification and sizes. Heating tunnel is suitable for fast productivity it is designed for high-speed production with zero maintenance, Individual control system for heating tunnel.



SALIENT FEATURES: -

- Programmable Temperature controller.
- Silicon coated Roller conveyor.
- High temperature wire mesh conveyor.

Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019

M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com


- Suitable for fast productivity, it is designed for high-speed production with zero maintenance.
- Individual control system for heating tunnel.
- Consistent and improved airflow in heating tunnel.
- Lower wattage air fine/Infrared heaters, Reduced power consumption.

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Bottle Heating
4	Model No	SPMC06
5	Output per Hour	60 to 65 Bottle/Minute
6	Direction of Movement	Left to Right
7	Gear Box (Conveyor + Main)	Bonfiglioli
8	Make Motor (Conveyor + Main)	Bonfiglioli
9	Working Desk Height	860 To 910 mm
10	Power supply	240V /15A/50Hz/-1Ph
11	Power consumption	03 Kw
12	Speed	0-10 mtr/min

7.S-Conveyor

Modular belt conveyor is a middle ground between belt conveyors and chain conveyors. A modular belt consists of individual plastic modules usually linked together with joint rods. This modular belt is driven by chain sprockets; the base frame of the conveyor is constructed on standard profile supports.
The modular belt makes it possible to accept hot workpieces or workpieces with sharp edges. Furthermore, large conveyor widths can be implemented without high pre-tensioning of the belts. However, in contrast to chain conveyors, this design is less maintenance-intensive and is a technically simpler solution. These systems are frequently used as cooling lines, since the chain modules can be designed to be permeable to air.

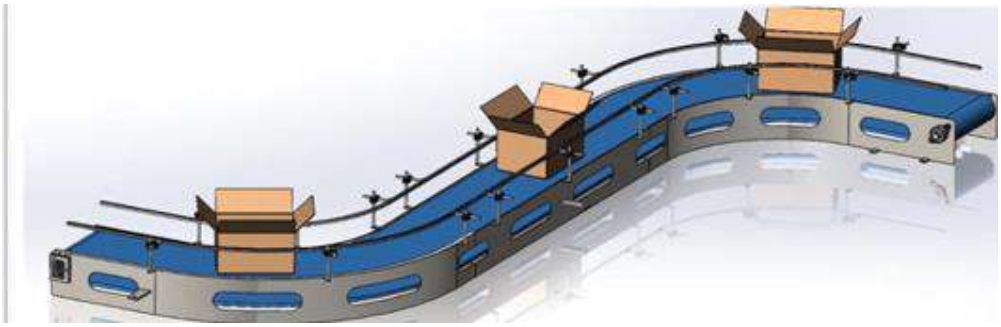

SALIENT FEATURES: -

- It is one of the simplest conveyors.
- It is used for conveying crates, box, pouches, Bottles & bags.
- It can be moved 90deg, 180deg, 270deg.
- It can carry various products up to 100kg.
- Size of the conveyor is designed as per the requirement.

- Used in food & pharma industries.
- Easy to clean & maintain.
- Easy to replace belt as it is modular.

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Bottle Transfer
4	Model No	SPMC06
5	Output per Hour	60 to 65 Bottle/Minute
6	Direction of Movement	Left to Right
7	Gear Box (Conveyor + Main)	Bonfiglioli
8	Make Motor (Conveyor + Main)	Bonfiglioli
9	Working Desk Height	860 To 910 mm
10	Power supply	240V /15A/50Hz/-1Ph
11	Power consumption	0.75 Kw
12	Speed	0-11 mtr/min

8.Case Erector

Case Erectors is used to erect carton which are formed automatically and use tape as sealing materials to seal the bottom flaps of carton. A stack of corrugated blanks is placed into the machine. The blanks are pulled out of the machine one-by-one and formed into cases. The newly formed cases are sealed at the bottom with tape or glue. This machine can be used for wide range such as household appliances, spinning, food, general merchandise, medicine, chemical industry, ceramics industry and so on.





MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Case forming
4	Model No	SPMC06
5	Output per Hour	8-/10 Case/Minute
6	Direction of Movement	Left to Right
7	PLC	Siemens
8	Switchgears	Schneider

Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019

M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com

9	Sensor	P & F
10	Power supply	240V /15A/50Hz/-1Ph
11	Power consumption	0.75 Kw
12	Speed	0-10 mtr /min
13	Voltage	1P，220V，50Hz
14	Tape	Bopp tape
15	Tape size	4.8cm–7.2cm(Std machine)
16	Air supply	Air pipe φ10 mm,≥6Kgf/cm²
17	Noise	≤75DB
18	Material of construction	MS powder coated

Roller conveyor.webp

9 Driver Roller Conveyor

Roller conveyors are intended for transporting piece goods such as solid boxes or pallets with rigid, flat bases. The drive concept can be selected to suit your particular application. Whether driven by gravity, a tangential chain, a drive roller or a friction drive, all systems are available in straight lines and curves.



SALIENT FEATURES: -

- It is one of the drive roller conveyors.
- It is used in conveying crates & box in 90deg.
- It can carry various products up to 100kg.
- Size of conveyor is designed as per requirement.
- Used in different types of industries.
- Easy to clean & maintain.
- Easy to replace belt as it is modular.

Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019


M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Case Transferring
4	Model No	SPMC06
5	Output per Hour	8-/10 Case/Minute
6	Direction of Movement	Left to Right
7	PLC	Siemens
8	Gear motor	Bonfiglioli/Equivalent
9	Sensor	P & F
10	Power supply	240V /15A/50Hz/-1Ph
11	Power consumption	0.37 Kw
12	Speed	0-20 mtr /min
13	Drive roller	SS-304
14	Structure	MS powder coated
15	Side guard	Aluminum guide
16	Foot	Specta plast
17	Pneumatic cylinder	Festo

10.Case Tapping Machine

Auto carton sealer/tapping is suitable for carton / case packing, which can be used for single use or production line. It adopts adhesive tape to seal carton/case. It can be finishing the sealing both top and bottom. Also, you can adjust the height and width for different cartons It is widely used in food, pharma, medicine and so on.

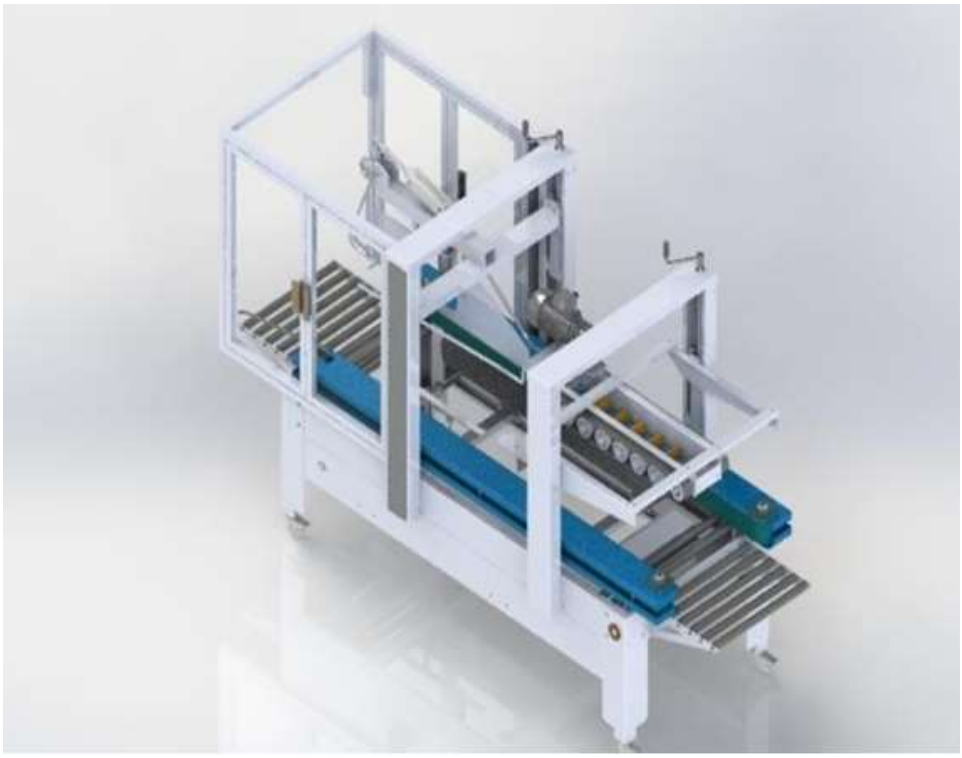


MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Case Tapping
4	Model No	SPMC06
5	Output per Hour	8-/10 Case/Minute
6	Material of construction	MS powder coated
7	PLC	Siemens
8	Switchgears	Schneider
9	Sensor	P & F
10	Power supply	240V /15A/50Hz/-1Ph
11	Power consumption	0.75 Kw
12	Speed	0-10 mtr /min
13	Voltage	1P，220V，50Hz
14	Tape	Bopp tape
15	Tape size	4.8cm–7.2cm(Std machine)
16	Air supply	Air pipe φ10 mm,≥6Kgf/cm²
17	Noise	≤75DB

11.Pick & Place Unit

Typically mounted on a stable stand, pick and place robots are positioned to reach different areas to perform work. They use advanced vision systems to identify, grasp and move objects from one place to another. Matrix of bottle will pick by bottle gripper and place into the boxes as per no. of matrix pick and place can be done.

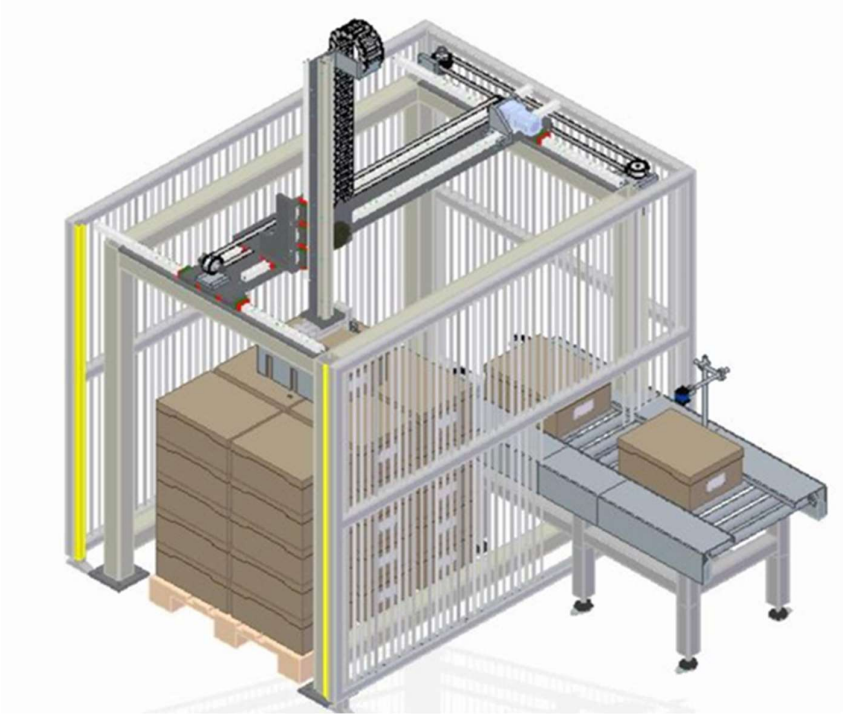

MACHINE SPECIFICATION

Sr. no	Parameter	Description
1	Machine Type	Automatic
2	Brand	NIHVA
3	Usage/Application	Bottle pick & place into case
4	Model No	SPMC06
5	Output	8-/10 Case/Minute
6	Direction of Movement	Left to Right
7	PLC	Siemens
8	Servo motor	Siemens /Festo
9	Sensor	P & F
10	Power supply	240V /15A/50Hz/-1Ph
11	Power consumption	0.37 Kw
12	Speed	0-20 mtr /min
13	Drag chain	Igus
14	Structure	MS powder coated
15	Linear guide	Hiwin
16	Foot	Specta plast
17	Pneumatic cylinder	Festo

12.Idler Roller Conveyor

After case sealing from top of the box filled box will come and accumulate on this gravity roller conveyor. From this point filled box will pick manually.



SALIENT FEATURES: -

- It is one of the gravity roller conveyors.
- It is used for conveying crates, box
- It can be moved 90 deg, 180 deg, 270 deg.
- It can carry various products up to 100 kg.
- Size of conveyor is designed as per requirement.
- For any industries we can use it.
- Easy to clean & maintain
- Easy is replace roller as it is modular.

Office Add: 187/G-block, 1st Floor, Thermax Chowk, above Renault Showroom, MIDC Chinchwad, Pune 411019

M: +91 855 109 1333 Email: sales@nihva.com Website: www.nihva.com