EN cod. 050047-B rev. 005 21/05/2015

PRODUCT DATASHEET


STOPPY B 115/500 - STOPPY B 200/700

Automatic electromechanical bollard

Designed in two versions for installation in spaces for collective use:
- STOPPY B 115/500 for private context (parking space saver, access to private homes, garages, etc.)
- STOPPY B 200/700 for collective contexts (condominiums, hotels, etc.)


STOPPY B 115/500



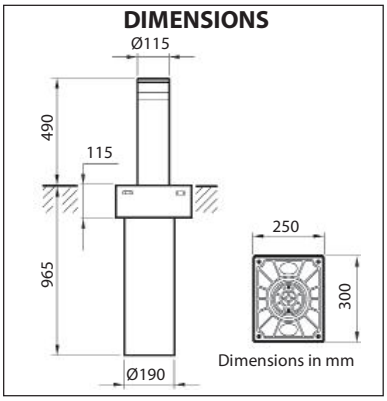

STOPPY B 200/700



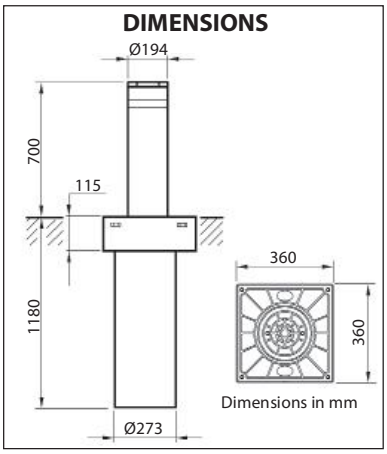

- **Automatic electromechanical retractable bollards for intensive use**
- Actuator in permanent grease
- Break-in resistance: **60 000 J** for STOPPY B 115/500**; 110 000 J** for STOPPY B 200/700
- Work time: **6.0 s** for STOPPY B 115/500; **9.0 s** for STOPPY B 200/700
- Max operating frequency: up to **500 op./day**
- MCBF: **400 000 cycles**
- Electric parking brake to stem high
- Limit switches
- Rod position with magnetic sensor
- Cap with LED light for STOPPY B 200/700 version
- It lowers manually with power cut-off
- Electrical emergency unit for maintaining high stem (optional)

REFERENCE STANDARDS

2004/108/CEE; 93/68/CEE (EN55014-1; EN55014-2) • Electromagnetic Compatibility
2006/95/CEE; 93/68/CEE (EN60335-1(2002)) • Low voltage
2006/42/CEE (EN60204-1) • Machinery directive
99/5/CEE (ETSI EN 301 489-3 (2002) + ETSI EN 301 498-1 (2005); ETSI EN 300 220-2 (2006)) •
Radio set (tested with the electronic control unit PERSEO CBD)

© **BFT spa** reserves the rights to change the information hereby contained at any time and without prior notice. Pictures are only indicative and could differ from the received machine for some details.