NICE RANGE FOR INDUSTRIAL DOORS OVERVIEW 2014

MORE FUNCTIONS, SIMPLIFIED INSTALLATION AND EASIER PROGRAMMING.




WITH NICE
YOU FIND ALWAYS
THE RIGHT SOLUTION!

THE NEW ADVANCED RANGE OF RELIABLE AND VERSATILE AUTOMATIC CONTROL UNITS

FOR INDUSTRIAL AND COMMERCIAL DOORS, COVERING EVERY APPLICATION NEEDS.

- **D-PRO Comfort,** extreme ease of connection, installation and use.
- **D-PRO Automatic,** the standard on the market, with many advanced features.

More functions, now at your hand!



D-PRO COMFORT



D-PRO AUTOMATIC

Nice

D-PRO COMFORT CONTROL UNITS

NEW | OPERA | BLUEBUS

Advanced control units for motors with mechanical and electronic limit switch, both automatic and deadman operation.
Equipped with Nice **BlueBUS** technology and compatible with **Opera** system, for the management, programming and diagnostics of automations, also remotely.

A practical solution:
- Quick identification of inputs/outputs
- Possibility to reprogram each connection for a different usage
- 8 LEDs for diagnostics
- Pause time programming.

Complete of a dedicated output for a traffic light.

Installation really simple, with Nice BlueBUS system you can connect compatible accessories and safety devices, easily and quickly with just two wires.

User-friendly: thanks to the O-View programmer (optional), it provides a graphic multi-function display interface with more configuration options available, such as modifying the opening and closing positions and changing the motor parameters.

With the advantage of modularity: a common logic board suitable for all types of motors, single phase with or without integrated inverter and three-phase, with the possible choice of different power modules (1.1 kW - 2.2 kW) according to the specific application.

Safe, the power module is protected by a plastic shell, to avoid any risk of electrical shock.

Radio receiver: dedicated slot to connect a Nice SMXI or OXI plug-in receiver.

Smart, the service warning for maintenance can be programmed according to the number of manoeuvres required.

Lower consumption and more autonomy, it switches over to stand-by when the system is not in operation.



NEW PLASTIC BOX, MORE PRACTICAL, WITH POSSIBILITY TO OPEN IT ON BOTH SIDES, RIGHT AND LEFT. THE IDEAL SOLUTION IN CONSTRAINED SPACES, LIKE SEVERAL DOORS INSTALLED CLOSE TO EACH OTHER, OR NEAR A SIDE WALL



PRACTICAL OPERATION OF THE DOORWITH UP - STOP - DOWN BUTTONS ON THE BOX COVER

LONG-LASTING, VERY RESISTANT IN WET AND DUSTY ENVIRONMENTS

TAKE ADVANTAGE OF THE D-PRO COMFORT CONTROL UNIT



EASY PROGRAMMING WITH 3 BUTTONS AND 8 LEDS FOR DIAGNOSTICS. REMOVABLE CLAMPS, CLEARLY IDENTIFIED, FOR SIMPLER ELECTRICAL INSTALLATION.




THE POSSIBILITY TO INTERACT WITH THE CONTROL UNIT BY MEANS OF THE O-VIEW PROGRAMMER, THE IMMEDIATE LEARNING PROCEDURE OF THE BLUEBUS DEVICES AND OF THE LIMIT POSITIONS GREATLY SIMPLIFY THE INSTALLER'S TASK.

D-PRO COMFORT CONTROL UNITS

CODE	DESCRIPTION	PCS./PACK
NDCC2301	CONTROL UNIT FOR ONE MOTOR 230 Vac, SINGLE-PHASE OR WITH INVERTER. BLUEBUS TECHNOLOGY, COMPATIBLE WITH OPERA SYSTEM	1
NDCC4001	CONTROL UNIT FOR ONE MOTOR 208/230/400 Vac, THREE-PHASE, UP TO 1.1 kW. BLUEBUS TECHNOLOGY, COMPATIBLE WITH OPERA SYSTEM	1
NDCC4002	CONTROL UNIT FOR ONE MOTOR 208/230/400 Vac, THREE-PHASE, UP TO 2.2 kW. BLUEBUS TECHNOLOGY, COMPATIBLE WITH OPERA SYSTEM	1

TECHNICAL SPECIFICATIONS	**NDCC2301**	**NDCC4001**	**NDCC4002**
POWER SUPPLY (Vac 50/60 Hz)	230	208/230/400	208/230/400
MAX MOTOR POWER (kW)	1.5	1.1	2.2
LOGIC UNIT POWER SUPPLY (Vdc)	24		
POWER IN STANDBY	< 1 W		
EXTERNAL UP, DOWN, AND IMPULSE INPUT	FREE PROGRAMMABLE		
FLASHING LIGHT OUTPUT	12 V - 21 W		
DOOR STATUS SIGNAL (SCA)	24 V - 10 W		
TRAFFIC LIGHT OUTPUT	24 V - 10 W		
SENSITIVE EDGE	OPTICAL, 8.2 KΩ ELECTRICAL AND 8.2 KΩ PNEUMATIC		
BLUEBUS CONNECTION	MAX 12 BLUEBUS UNITS		
EXTRA OUTPUT	ZERO POTENTIAL CONTACT (RELAY)		
DC OUTPUT	24 Vdc 1A		
STOP INPUT	FOR OPEN, CLOSED CONTACTS, FOR CONSTANT RESISTANCE 8.2 KΩ OR OPTICAL OSE INPUTS		
OPERATING TEMPERATURE (°C)	-20 ÷ +50		
PROTECTION CLASS (IP)	55		
DIMENSIONS (mm)	210x125x310 h		
WEIGHT (kg)	3.5		

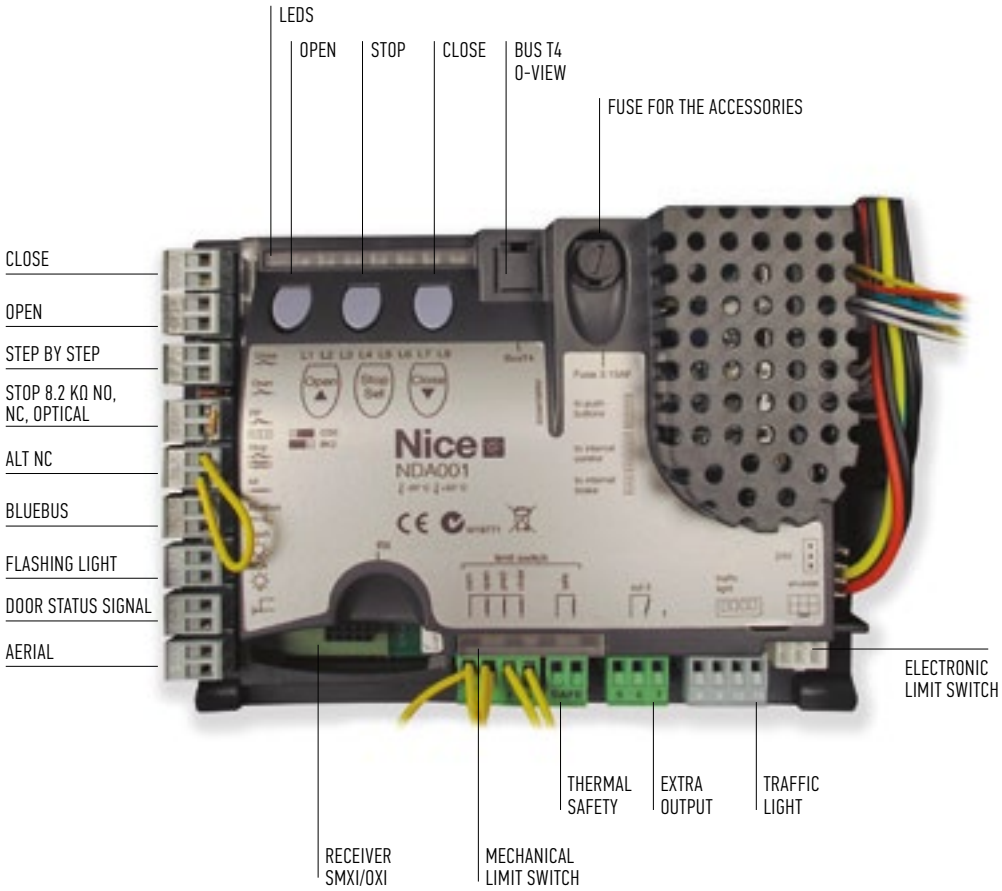

Nice

D-PRO AUTOMATIC CONTROL UNITS

NEW

Advanced control units for motors with mechanical and electronic limit switch, both automatic and deadman operation.

Suitable for all types of motors, single phase with or without integrated inverter and three-phase, with 2.2 kW maximum power.

Easy programming and immediate diagnostics by means of the 4-digits display integrated in the cover.

Performing with possibility to add dedicated modules for additional functions, such as traffic light and loop detectors, and to connect external transmitters. Compatible with all types of sensitive edges, including wireless ones.

The ideal solution for doors to be interlocked: thanks to the dedicated function, the control unit allows to operate different doors alternatively, to restrict or control entry to and from areas that need to be secured against two or more doors being open simultaneously.

Safe, the power module is protected by a plastic shell, to avoid any risk of electrical shock.

Radio receiver: dedicated slot to connect a Nice OXI plug-in receiver.

Smart: the service warning for maintenance can be programmed according to the number of manoeuvres required.

Customizable: further button configurations are available on request, such as emergency stop switch.

The TÜV certification means safety in all situations.

EASY PROGRAMMING, IMMEDIATE READING OF THE SYSTEM STATUS AND DIAGNOSTICS BY MEANS OF THE LARGE 4-DIGITS INTEGRATED IN THE COVER



STANDARD BUTTONS SET UP-STOP-DOWN



NEW PLASTIC BOX, MORE PRACTICAL, WITH POSSIBILITY TO OPEN IT ON BOTH SIDES, RIGHT AND LEFT. THE IDEAL SOLUTION IN CONSTRAINED SPACES, LIKE SEVERAL DOORS INSTALLED CLOSE TO EACH OTHER, OR NEAR A SIDE WALL

TAKE ADVANTAGE OF THE ADDITIONAL MODULES FOR D-PRO AUTOMATIC CONTROL UNITS



NDA030
FOR A 2-WAY TRAFFIC LIGHT
AND EXTRA PROGRAMMABLE
INPUTS/OUTPUTS



NDA070
FOR LOOP DETECTORS
FOR VEHICLES

D-PRO AUTOMATIC CONTROL UNITS

CODE	DESCRIPTION	PCS./PACK
NDCC1100	CONTROL UNIT FOR ONE MOTOR 230 Vac, WITH INTEGRATED INVERTER OR THREE-PHASE, 2.2 kW	1
NDCC1200	CONTROL UNIT FOR ONE MOTOR 230 Vac, SINGLE-PHASE TYPE SW, 2.2 kW	1
NDCC1000	CONTROL UNIT FOR ONE MOTOR 400 Vac, THREE-PHASE, 2.2 kW	1


ADDITIONAL MODULES

CODE	DESCRIPTION	PCS./PACK
NDA030	ADDITIONAL I/O EXPANDER FOR D-PRO AUTOMATIC CONTROL UNIT WITH TRAFFIC LIGHTS FUNCTION IN BOTH DIRECTIONS, SIX MORE GENERAL PURPOSE INPUT AND FOUR POTENTIAL FREE OUTPUT	1
NDA070	ADDITIONAL 1 OR 2 CHANNELS MODULE FOR INDUCTION COILS CONNECTION (12-24 Vdc) WITH SEVERAL PROGRAMMABLE FUNCTIONS	1

TECHNICAL SPECIFICATIONS	**NDCC1100/NDCC1200**	**NDCC1000**
POWER SUPPLY (Vac 50/60 Hz)	230	400
MAX MOTOR POWER (kW)	2.2	2.2
LOGIC UNIT POWER SUPPLY (Vdc)	24	
POWER IN STANDBY	< 4 W	
PRE LIMIT INPUT	FREE PROGRAMMABLE	
EXTERNAL UP, DOWN, AND IMPULSE INPUT	FREE PROGRAMMABLE	
TRAFFIC LIGHT OUTPUT	FREE PROGRAMMABLE, POTENTIAL FREE CONTACT	
SENSITIVE EDGE	OPTICAL, 8.2 KΩ ELECTRICAL AND 8.2 KΩ PNEUMATIC	
EXTRA OUTPUTS	3 FREE PROGRAMMABLE, POTENTIAL FREE CONTACTS (10 WITH ADDITIONAL MODULE)	
DC OUTPUT	24 Vdc 600 mA	
STOP INPUT	NORMALLY CLOSED CONTACTS	
OPERATING TEMPERATURE (°C)	-20 ÷ +50	
PROTECTION CLASS (IP)	55	
DIMENSIONS (mm)	210x125x310 h	
WEIGHT (kg)	3.5	

NICE AUTOMATION SETUP

THE INTEGRATED INTERLOCKING FUNCTION ALLOWS TO OPERATE TWO OR MORE DOORS ALTERNATIVELY: THE IDEAL SOLUTION FOR COLD STORAGE FACILITIES.

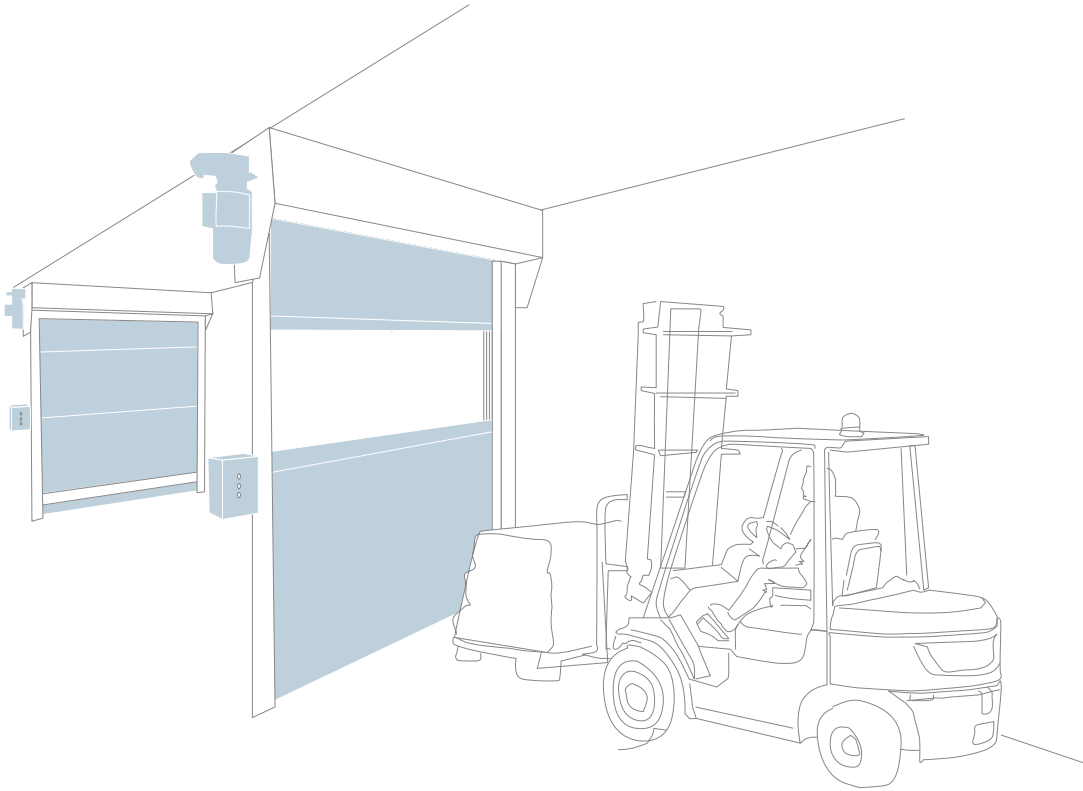



NICE INSTALLATION AT CAMPUS VEOLIA ENVIRONNEMENT CENTRE EST - FRANCE

D-PRO MONITORING AND INTERFACE MODULES

Latest generation accessories for the continuous remote monitoring, control and management of doors and dock levellers, simply and quickly, also via internet.

By adding a small monitoring module to each D-PRO Automatic control unit, all the working parameters of the system can be transferred and reported to a central control unit using a two-wires CAN field bus, which is managed by an interface device that allows practical connection via USB to portable terminals, PCs or servers, for intranet or Internet connection.

The ideal solution for large installations, such as in logistic centres.

Early reporting of failure or incorrect configuration: any device will send immediately the information when an event occurs. The CAN bus is connected to a local device controller with integrated graphical display, that manages the local infrastructure. The device controller can in turn be connected to an external server to monitor the whole environment.

Better customer support, thanks to more information available.

Collected data may be stored in a central SQL database for further analysis and reporting.
The stored data can be used for maintenance planning, tendency reports, etc.



NDA006
MONITORING MODULE




NDA008
REPEATER MODULE
IN A PLASTIC BOX

CODE	DESCRIPTION	PC./PACK
NDA006	ADDITIONAL MODULE FOR COMMUNICATION OVER INTERNET AND INTRANET. IT MUST BE USED IN COMBINATION WITH REPEATER MODULE NDA008 IN ORDER TO CREATE A NET OF REMOTE CONTROLLED DOORS.	1
NDA008	REPEATER MODULE WITH GRAPHIC DISPLAY AND USB ADAPTER, IN PLASTIC BOX, TO CONTROL UP TO 30 MONITORING MODULES	1

TAKE ADVANTAGE OF NICE AUTOMATION SETUP

MORE SERVICES, AT YOUR FINGERTIPS!
THE IDEAL SOLUTION FOR LARGE INSTALLATIONS, SUCH AS IN LOGISTIC CENTRES.
EVERYTHING UNDER CONTROL WITH REMOTE MONITORING.

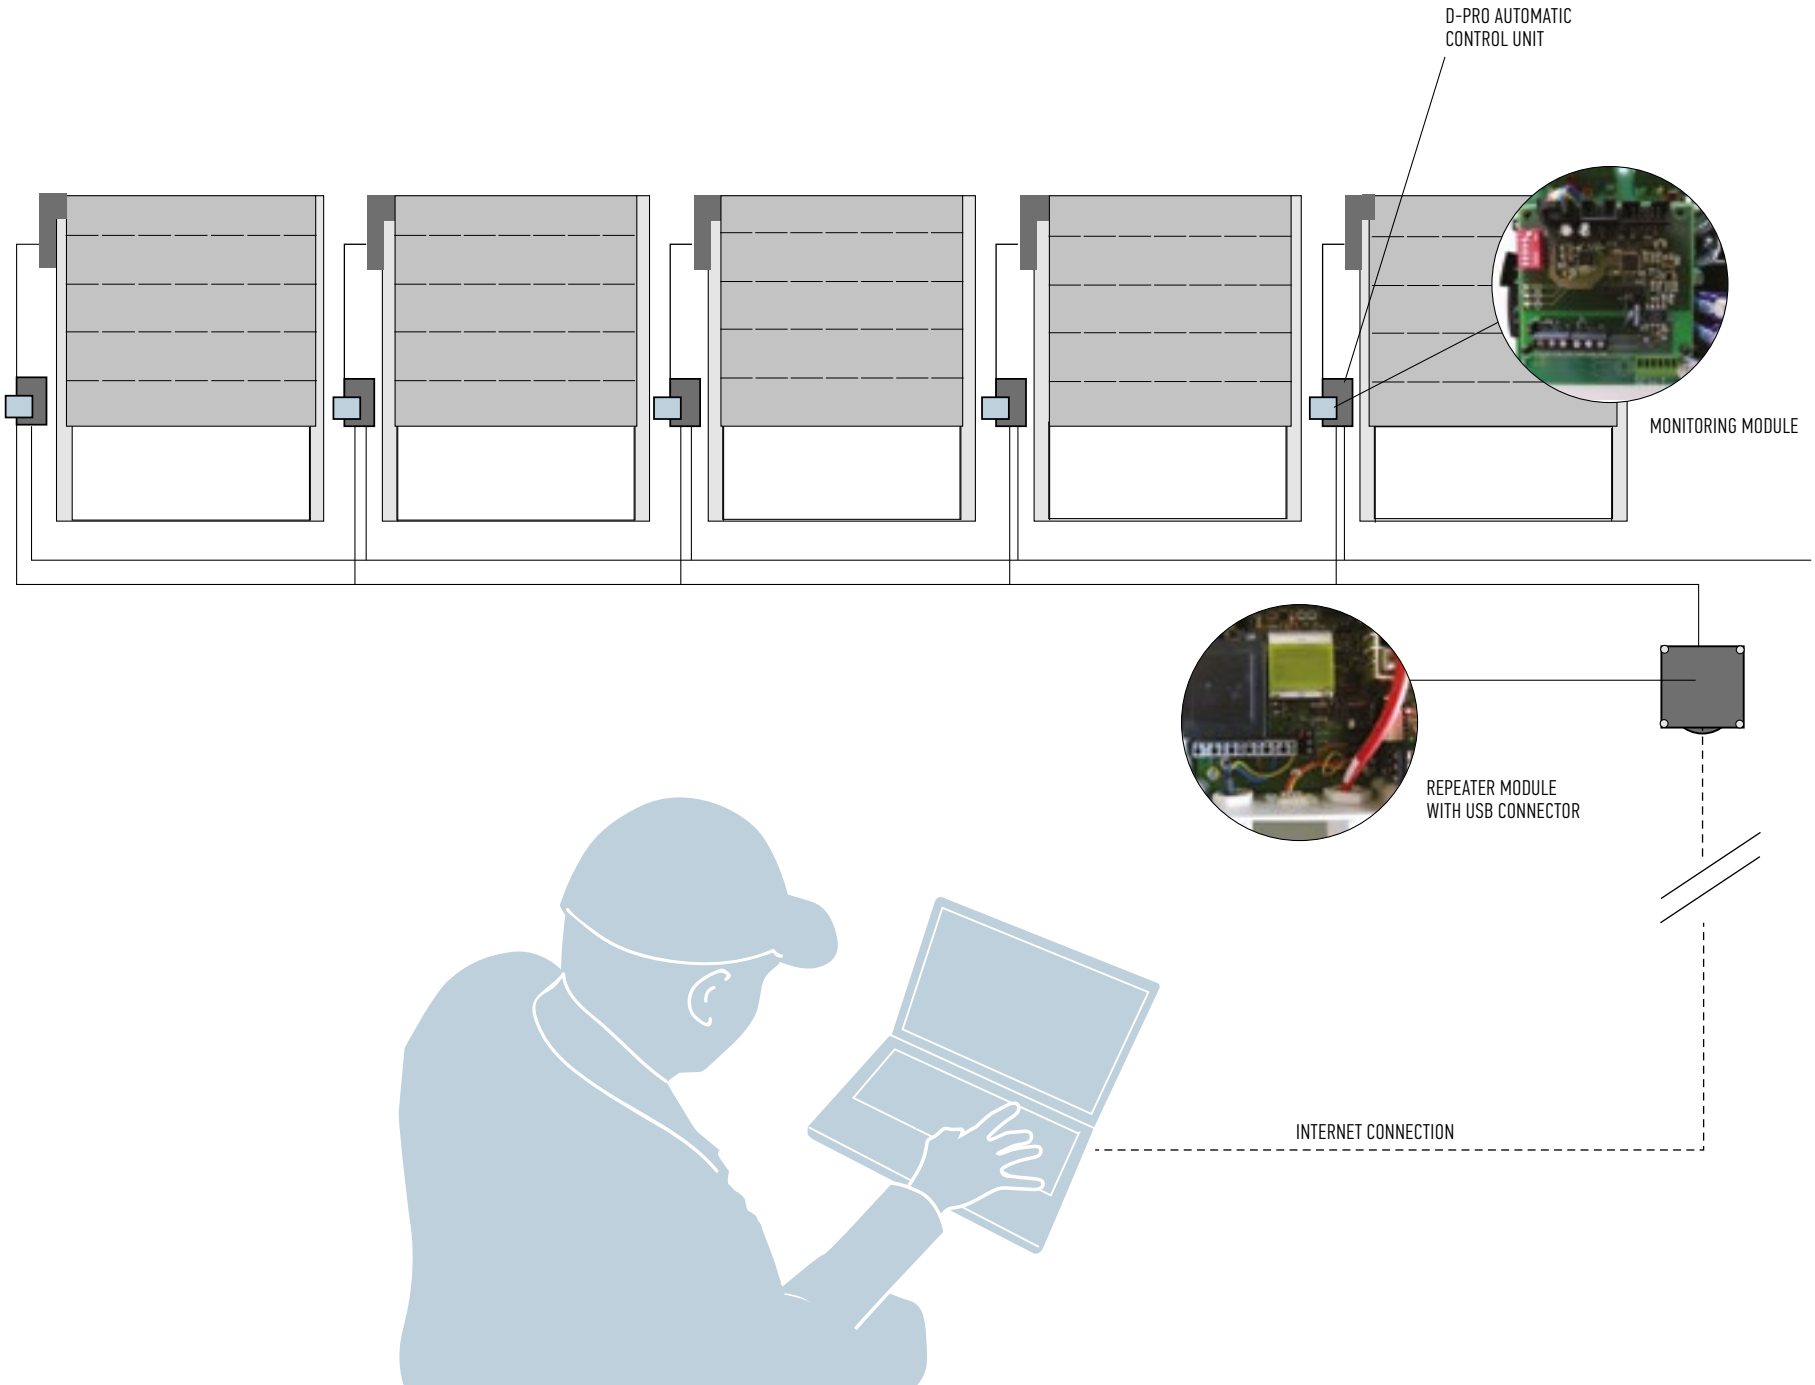



NICE MADE-TO-MEASURE SOLUTIONS

VERSATILE AUTOMATION SYSTEMS,
EASY TO INSTALL AND PROGRAM.

TAKE ADVANTAGE OF THE NICE INDUSTRIAL AUTOMATION OFFER FOR YOU:

- **Cutting-edge operators with advanced technology**
- **High quality of detail**
- **Reliable and durable operation**
- **Meets safety requirements**
- **Performance characteristics compliant with European directives and leading internationally recognized standards, including:**

Directive 2004/108/EC: Electromagnetic Compatibility
Directive 2006/42/EC: Machinery Directive
EN 60335-1:2013, EN60335-2-103:2003: Safety of electrical products

Convenient and practical solutions,
also offered in kits including everything you need for a 100% Nice installation.



SW/SD
for sectional doors



RDF
for rolling doors



HDFI WITH INVERTER ON BOARD
for high speed doors

Nice

GEARMOTORS FOR SECTIONAL DOORS



SW/SD

230V

Electromechanical gearmotor for sectional doors up to 550 kg, with integrated brake. Versions for 230 Vac single-phase and 230/400 Vac three-phase, with mechanical or electronic limit switches.

Simple installation:
The gearmotor is to be installed directly on the shaft of the sectional door.
Connection cables equipped with connectors simplify electrical installation.

Complete Nice gearmotor-cable-control unit kits are directly wired in production and allow installation time to be further reduced.


Sturdy
Gearmotor with bronze gears, with permanent lubrication

Practical:
Release available in 3 versions:
- cable release
- crank emergency
- chain-operated emergency, the ideal solution for every type of application.

Compact and efficient:
torque up to 140 Nm, speed up to 24 rpm.

Safety:
gearmotors compliant with the most recent European standards and directives in terms of safety and technology.

Smart
UST1 series control unit separated from the gearmotor, simple and reliable, equipped with:
- mechanical or electronic limit switches
- possibility to connect photoelectric barriers and optical or resistive sensitive edges 8.2 kΩ
- deadman or automatic operation, control via radio or via cable
- possibility to expand with additional modules.

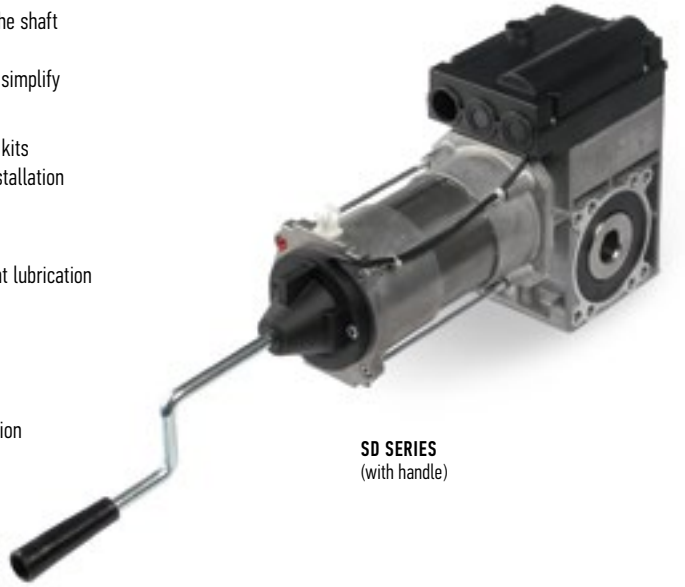


SD SERIES
(with handle)

SD SERIES
(with cable)




SD SERIES
(with chain)




SW SERIES




Crank emergency (KU series)
and cable release (E series)



Chain-operated emergency
(KE series)




Chain-operated emergency
(KE2 series)



TECHNICAL SPECIFICATIONS	SW-70-20	SD-100-24	SD-120-20	SD-140-20
SHAFT ∅ (mm)	25.4			25.4 / 31.75
MAX. TORQUE (Nm)	70	100	120	140
RATED TORQUE (Nm)	60	80	100	120
STATIC OVERTURNING MOMENT (Nm)	230			440
WEIGHT LIFTED* (kg)	300			550
ABSORBED POWER (kW)	0.20	0.37		0.55
WORKING VOLTAGE (V/Hz)	1x230 V 50 Hz	3x230 V / 3x400 V 50 Hz		
SERVICE FACTOR (ED)	S3 -20%	S3 -60%		
CONNECTION CABLE (no. x mm^2)	3 x 1.5	5 x 1.5		
NOMINAL CURRENT (A)	3.45 / 2.0	3.1	2.6 / 1.5	3.45 / 2.0
LIMIT SWITCH (rpm)	15			
OPERATING TEMPERATURE (°C)	-5 ÷ +40			
NOISE DB (A)	<70			
PROTECTION RATING (IP)	54			
WEIGHT (kg)	11.5	11.1	11	12

* For balanced doors with 1-4 compensating springs with a ∅ 160 mm diameter cable winder drum, observe the permitted cable forces, the danger warnings and the general rules of safety.

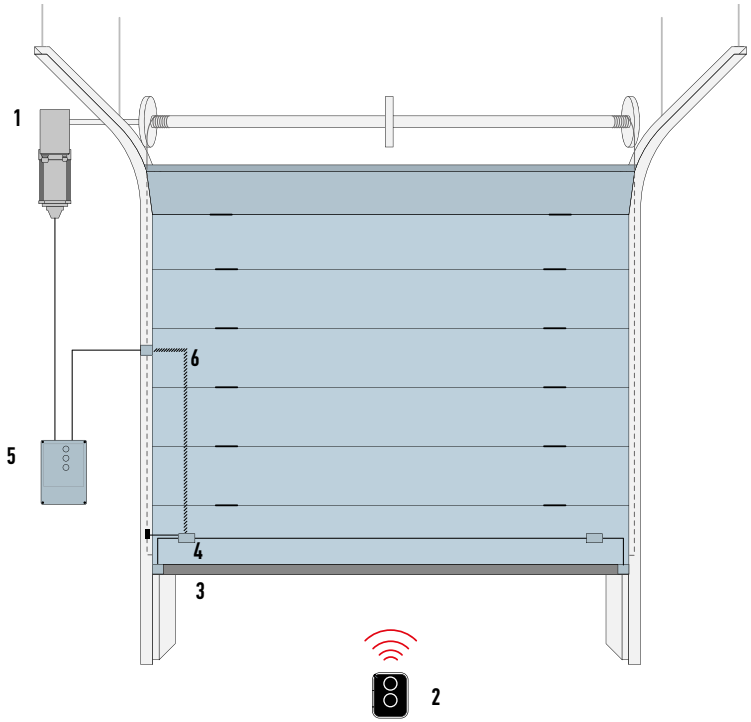

SECTIONAL DOOR
1. SD/SW GEARMOTOR **2.** TRANSMITTER **3.** SENSITIVE EDGE
4. CONNECTOR BLOCK S**5.** CONTROL UNIT **6.** SPIRAL CABLE

GEARMOTORS FOR ROLLING DOORS



RDF

Electromechanical gearmotor for rolling doors up to 750 kg, with integrated brake and mechanical or electronic limit switches, chain-operated emergency (KE2 series) or crank emergency (KU series) with integrated anti-fallback device

Simple installation:
the gearmotor is to be installed directly on the shaft of the rolling door (∅ 30 mm, ∅ 40 mm, ∅ 55 mm). Connection cables equipped with connectors simplify electrical installation.


Complete Nice gearmotor-cable-control unit kits are directly wired in production and allow installation time to be further reduced.

Compact and efficient:
torque up to 1,400 Nm. Speed up to 20 rpm.


Unbeatable safety:
due to the anti-fallback safety system and the chance to connect safety devices such as optical or resistive sensitive edges (8.2 kΩ). Gearmotors compliant with the most recent European standards and directives in terms of safety and technology.

Practical:
Release available in 2 versions:
- crank emergency
- chain-operated emergency, the ideal solution for every type of application.


Available on request: special accessories for fastening, shafts and discs to be welded.

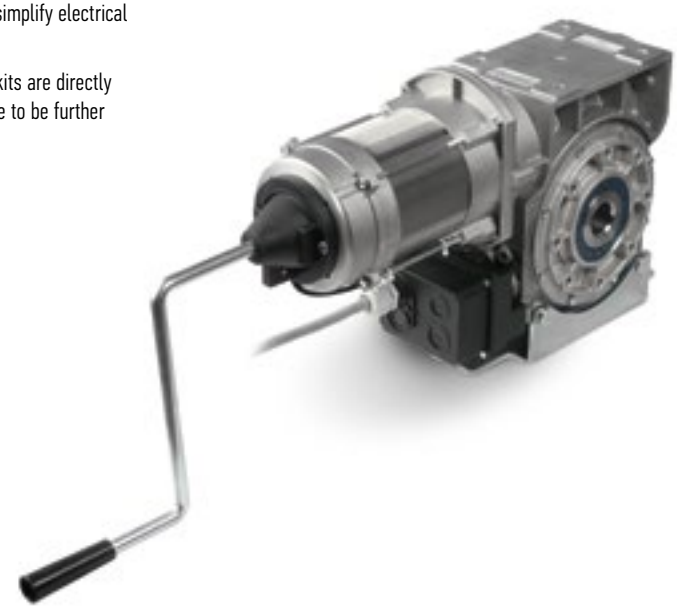

Crank emergency (KU series)



Chain-operated emergency (KE2 series)



TECHNICAL SPECIFICATIONS	RDF-140-20	RDF-220-15	RDF-290-15	RDF-380-15	RDF-450-15	RDF-550-12	RDF-750-9.5	RDF-850-10	RDF-1100-10	RDF-1400-7
SHAFT ∅ (mm)	30			40				55		
MAX. TORQUE (Nm)	140	220	290	380	450	550	750	850	1,100	1,400
RATED TORQUE (Nm)	120	200	250	360	400	450	700	700	950	1,250
OUTPUT (rpm)	20	15	15	15	15	12	9.5	10	10	7
MOTOR POWER (kW)	0.55	1.1	1.1	1.5	1.5	1.5	1.5	2.2	2.2	2.2
LIMIT SWITCH (rpm)	15	10-20	10-20	10-20	10-20	10	40	10-40	10-40	10-40
WORKING VOLTAGE (V/Hz)	3x230 V / 3x400 V 50 Hz									
DUTY CYCLE	S 3 - 60%									
CONNECTION CABLE (no. x mm^2)	5 x 1.5									
OPERATING TEMPERATURE (°C)	-5 ÷ +40									
NOISE dB(A)	<70									
PROTECTION RATING (IP)	IP 54									
WEIGHT (kg)	12.4	22	24	28.9	27.7	27.7	35	51.7	51.9	58

Gearmotors with integrated anti-fallback device, independent of speed and position.

MAX. SHUTTER WEIGHT (KG):


STEEL PIPE EN 10220 (mm)

GEARMOTOR	RDF SERIES	101.6 X 3.6	108.0 X 3.6	133.0 X 4	159.0 X 4.5	177.8 X 5	193.7 X 5.4	219.1 X 5.9	244.5 X 6.3	273.0 X 6.3	298.5 X 7.1	323.9 X 7.1
	RDF-140-20	125	122	115	106	99	94	85	77	69	64	59
	RDF-220-15	208	204	192	177	166	157	142	128	115	106	98
	RDF-290-15	260	255	240	221	207	197	177	160	144	133	123
	RDF-380-15	375	368	335	319	299	284	255	231	208	192	177
	RDF-450-15	416	408	383	354	332	315	284	256	231	213	197
	RDF-550-12	468	460	431	399	373	355	319	289	260	240	222
	RDF-750-9.5	781	715	671	620	581	552	497	449	405	373	345
	RDF-850-10	-	-	-	664	622	592	532	481	434	400	370
	RDF-1100-10	-	-	-	842	788	750	675	610	550	506	469
	RDF-1400-7	-	-	-	1,063	1,038	987	888	770	724	666	617

The table applies only to section bars with a single wall (thickness 20 mm).
The dimensions must be taken into account for the winding if section bars with double wall, with greater thickness or higher are used.

In this case higher torque applies after 1-2 turns.
A 20% friction loss is considered for the normal rolling shutters in the table.

It is generally advisable to check the door proportions when there are coverings, section bars with double wall, doors higher than normal or in the case of particular entry situations that could require other force ratios or cause additional friction losses (e.g. doors that are wider than the height), for example.

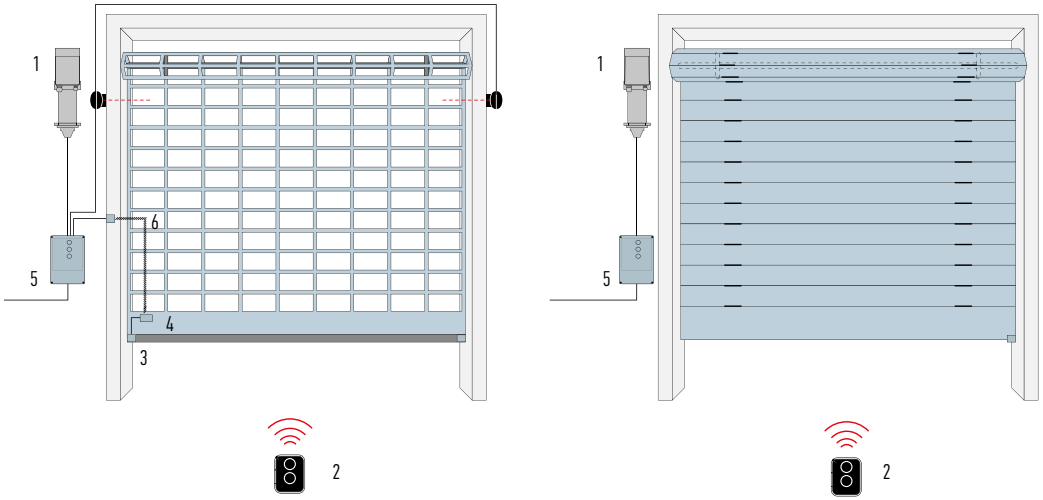

SHUTTERS
1. RDF GEARMOTOR **2.** TRANSMITTER **3.** SENSITIVE EDGE
4. CONNECTOR BLOCK **5.** CONTROL UNIT **6.** SPIRAL CABLE

GEARMOTORS FOR HIGH SPEED DOORS



HDFI

Electromechanical gearmotor for high speed doors, with on board inverter, electronic limit switches, crank emergency (KU series), integrated anti-fallback device, brake and fixing bracket.

Simple installation:
The HDFI series is to be installed directly on the shaft of the door (∅ 25 mm, ∅ 30 mm and ∅ 40 mm).
Cables equipped with connectors simplify electrical connections.

All gearmotors are equipped with a pre-wired cable and ready to Plug&Play with D-Pro family control units.

Complete gearmotor-inverter-cable-control unit kits are also available allowing installation time to be further reduced.


Compact and efficient:
torque up to 350 Nm speed up to 135 rpm at 50 Hz.

Practical: release available with crank emergency.

Unbeatable safety:
due to the integrated anti-fallback safety system and the chance to connect safety devices and optical or resistive 8.2 kΩ sensitive bars, the gearmotors are compliant with the most recent European standards and directives.




Crank emergency (KU series)



Nice

TECHNICAL SPECIFICATIONS	HDFI-45-95	HDFI-30-120	HDFI-70-135*	HDFI-95-95*	HDFI-350-45*	HDFI-180-95*	HDFI-135-135*
SHAFT ∅ (mm)	30	30	40	40	40	40	40
MAX. TORQUE (Nm)	45	30	70	95	350	180	135
RATED TORQUE (Nm)	36	30	55	80	300	150	110
OUTPUT (rpm)	95	120	135	95	45	95	135
MOTOR POWER (kW)	0.9	1.1	1.5	1.5	2.2	2.2	2.2
LIMIT SWITCH (rpm)	15	15	20	20	40	20	10 - 20
WORKING VOLTAGE (V/Hz)	1x230V - 50Hz	3x230V - 50Hz	1x230V - 50Hz	1x230V - 50Hz	1x230V - 50Hz	1x230V - 50Hz	1x230V - 50Hz
DUTY CYCLE	S3 - 60%	S3 - 60%	S3 - 60%	S3 - 60%	S3 - 60%	S3 - 60%	S3 - 60%
OPERATING TEMPERATURE (°C)	-5 ÷ +40						
NOISE dB(A)	<70						
PROTECTION RATING (IP)	54						
WEIGHT (kg)	19	19	30	30	32	32	32

*Torque values can differ from what declared accordingly to the kind of installation.

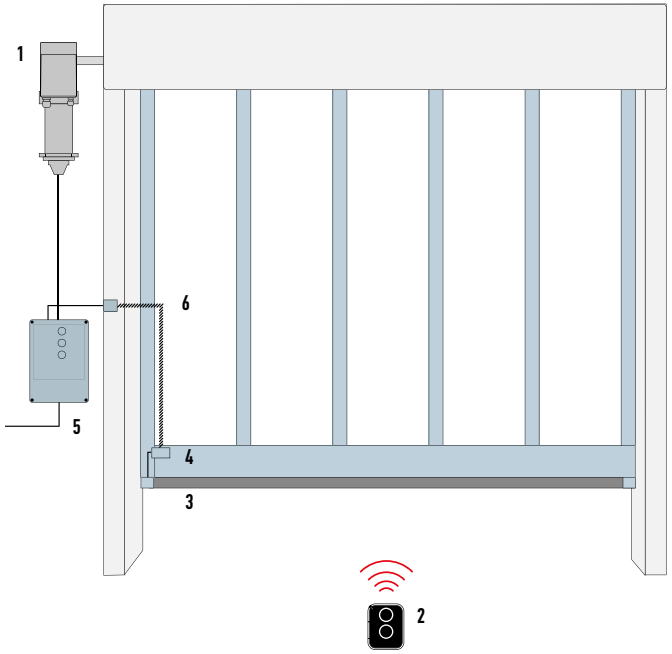

HIGH SPEED DOORS
1. HDFI GEARMOTOR **2.** TRANSMITTER **3.** SENSITIVE EDGE
4. CONNECTOR BLOCK **5.** CONTROL UNIT **6.** SPIRAL CABLE

ELECTRICAL ACCESSORIES

SBA, automatic adjustment sensor of the lower limit switch position.

Only for electronic limit switch versions.

Smart: Patented solution that automatically changes the lower limit switch position in the case of flooring modifications or defective door closings due to wear or other reasons.

Precise: The new position is recorded in the control unit and reproduced upon the next door movement

Flexible: It operates combined with all Nice Industrial motors and D-Pro series control units (no additional modules needed).

CODE	DESCRIPTION
NDA012	SBA SENSOR WITH CONNECTOR BLOCK AT FASTENING DOOR WITH REMOVABLE TERMINALS

CODE	DESCRIPTION
920091000010	CONNECTOR BLOCK FASTENED ON THE DOOR, WITHOUT BOARD, WITH 16 mm FRONT HOLE
NDA011	CONNECTOR BLOCK FASTENED ON THE DOOR FOR SENSITIVE EDGE (PHOTOCELLS) AND SPIRAL CABLE CODE 920081155516 CONNECTION, WITH 16 mm FRONT HOLE
NDA013	CONNECTOR BLOCK FASTENED ON THE DOOR FOR CONNECTING SAFETY DEVICES PROTECTING AGAINST POSSIBLE CABLE BREAKS (FOR SECTIONAL DOORS)
NDA010	CONNECTOR BLOCK FASTENED ON THE DOOR WITH INTEGRATED PNEUMATIC SWITCH AND USED FOR PNEUMATIC SAFETY BARS

CODE	DESCRIPTION
920132111001	PAIR OF PHOTOCELLS WITH ∅ 11.5 mm FOR OPTICAL SENSITIVE EDGE, 11.5 TO 22 mm ADAPTER INCLUDED. FOR DOORS UP TO 7 m OF WIDTH (CABLES FOR CONNECTING LENGTH OF 10.5 m - 1 m)
920081155516	5-WIRE COUPLING SPIRAL CABLE WITH EXTENSION FROM 0.8 TO 1.6 m, FOR OPTICAL OR SENSITIVE EDGE CONNECTION
920811000010	CYLINDRICAL SAFETY SWITCH TO PROTECT AGAINST POSSIBLE CABLE BREAKS (FOR SECTIONAL DOORS)
920821000010	SAFETY SWITCH TO PROTECT AGAINST POSSIBLE CABLE BREAKS OR SLACKENING



NDA012



920091000010
NDA011



NDA013



NDA010



920132111001



920081155516



920811000010



920821000010

ERA ONE

The system includes 1, 2, 4 and 9 channel transmitters and prewired receivers with connector, with and without built-in transmitter.



433.92 MHz rolling code, with management of Identity Codes and Certificates, self-learning and built-in proximity receiver; with 72 bit O-Code encoding, also compatible with receivers with Nice FLOR encoding.

Evolved: uses data processing and recognition systems that increase its degree of security and deliver a threefold reduction in automation response times.

Easy memorisation, even at a distance, thanks to Opera receivers.

ERA ONE TRANSMITTERS

CODE	DESCRIPTION	PCS/PACK
ON1E	1 CHANNEL, 433.92 MHz	10
ON2E	2 CHANNELS, 433.92 MHz	10
ON4E	4 CHANNELS, 433.92 MHz	10
ON9E	9 CHANNELS, 433.92 MHz	10

TRANSMITTER TECHNICAL SPECIFICATIONS

	Carrier frequency	Estimated range	Encoding	Power supply	Battery life	Protection class	Dimensions Weight
ON_E, ON_CE	433.92 MHz	200 m (outdoor); 35 m (if inside buildings)*	O-Code 72 bit; rolling code	3 Vdc; type CR2032 lithium battery	2 years (with 10 transmissions per day)	IP40 (use in protected environments)	44x55x10 h mm 11 g
ON_EFM	868.46 MHz						

* Transmitter range and receiver reception capacity may be affected by any devices operating on the same frequency in the area.

The complete line of receivers with Opera system functions, suitable for all installation requirements:

- **with connector,** compatible with latest-generation Nice control units with SM port;
- **universal prewired,** for use with all types of control unit, **for the control of any automation, lighting or irrigation system or other electric circuits.**

Convenient and practical:
the inclusion of a transmitter in the OXIT/OXITFM, OX2T/OX2TFM and OX4T receivers allows radio codes to be accessed by means of the O-Box multifunction interface even when in inaccessible positions.

The O-Box and dedicated software applications for PC and PDA allow:

- **quick, user-friendly programming** of receivers and transmitters;
- **management** and printout **of code list;**
- creation of **individual installation databases** (useful in multi-user systems).

433.92 MHz RECEIVERS, WITH OPERA SYSTEM FUNCTIONS

WITH CONNECTOR	CODE	DESCRIPTION	PCS/PACK
	**OXI**	4 CHANNELS, WITHOUT BUILT-IN TRANSMITTER	1
	OXIT	4 CHANNELS, WITH BUILT-IN TRANSMITTER	1
PRE-WIRED UNIVERSAL			
	**OX2**	2 CHANNELS, WITHOUT BUILT-IN TRANSMITTER	1
	OX2T	2 CHANNELS, WITH BUILT-IN TRANSMITTER	1
	**OX4T**	4 CHANNELS, WITH BUILT-IN TRANSMITTER	1

868.46 Hz RECEIVERS, WITH OPERA SYSTEM FUNCTIONS

WITH CONNECTOR	CODE	DESCRIPTION	PCS/PACK
	**OXIFM**	4 CHANNELS, WITHOUT BUILT-IN TRANSMITTER	1
	OXITFM	4 CHANNELS, WITH BUILT-IN TRANSMITTER	1
PRE-WIRED			
	**OX2FM**	2 CHANNELS, WITHOUT BUILT-IN TRANSMITTER	1
	OX2TFM	2 CHANNELS, WITH BUILT-IN TRANSMITTER	1

NICE IS THE SIMPLEST INTEGRATION/ THE WIDEST RANGE/THE BEST CONTROL ELECTRONICS/THE FINEST DESIGN/THE MOST AMAZING AUTOMATION ALL TOGETHER!

GATE&DOOR
Systems for the automation of gates, garage doors and barriers.

SCREEN
Systems for the automation of blinds, awnings and sun screens. The easiest way to get the right light.

INDUSTRIAL DOORS
Systems for the automation of industrial applications: sectional and rolling doors, high speed doors and dock levellers.

HOME SYSTEMS
Integrated management of home alarm and automation systems.



Nice

Nice SpA
Oderzo TV Italy
Ph. +39.0422.85.38.38
info@niceforyou.com

Find out more about Nice products and services on the website:
www.niceforyou.com

NiceLoveEarth

Nice cares for the environment.
Using natural paper it avoids excessive use of raw materials and forest exploitation.
Waste is reduced, energy is saved and climate quality is improved.

The information shown in this publication is purely indicative. Nice reserves the right to make any modifications to the products as it sees fit.

98.011/EN/100/11-14