



DRAWING

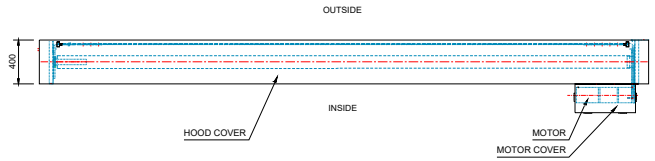



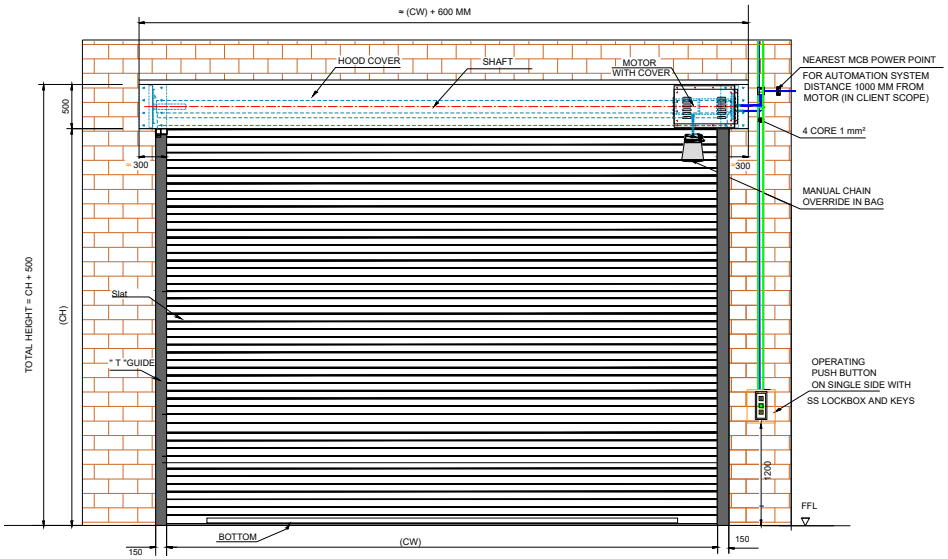

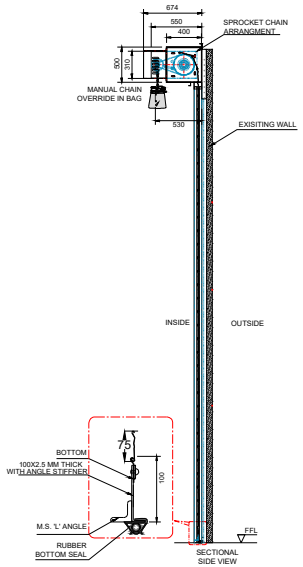

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)
2.	LOCATION AREA	INSIDE AREA / OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE
4.	SLAT	GALVALUME STEEL (75MM WIDTH X1.2 MM T)
5.	BOTTOM PROFILE	MS PLATE100 x 2.5 MM THICK WITH ANGLE STIFFENER.
6.	GUIDE PROFILE	M.S." T " SHAPED PROFILE 100X150X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	SURFACE FINISH	RAL - 5012 (LIGHT BLUE)
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	7000 mm	6000 mm	04

NOTE :

CONSIDERING THE LARGE DOOR SIZE (7000X6000 MM) & THE INCREASED CLEAR HEIGHT,THE DOOR WILL BE EXPOSED TO HIGHER WIND PRESSURE.TO ENSURE SAFE,SMOOTH,& RELIABLE OPERATION OVER ITS SERVICE LIFE, THE FOLLOWING MEASURES ARE RECOMMENDED:

1) MS GRILL IS RECOMMENDED BETWEEN THE SHUTTER TO PROVIDE ADDITIONAL STRENGTH & STABILITY DOOR.
2) SAFETY CATCH ARRANGEMENT NEED TO CONSIDERED TO PREVENT ACCIDENT IN CASE OF FAILURE IN DRIVE SYSTEM, ENSURING MAXIMUM SAFETY TO PERSONNEL & EQUIPMENT.

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 000

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE	PRODUCT -	
DRAWN	B.S.		21-01-2026	PROJECT NO - NTPL- 000	REVISION - 00
CHK'D	V.T.		21-01-2026	SITE LOCATION -	WEIGHT -
APPV'D	V.T.		21-01-2026	MATERIAL -	QTY -

IF ANY QUERIES CONTACT - Design@nihva.com
ALL DIMENSIONS ARE IN 'MM' A2
PROJECTION METHOD
SCALE :
SHEET 1 OF 1