


QUANTITY- 01 NOS

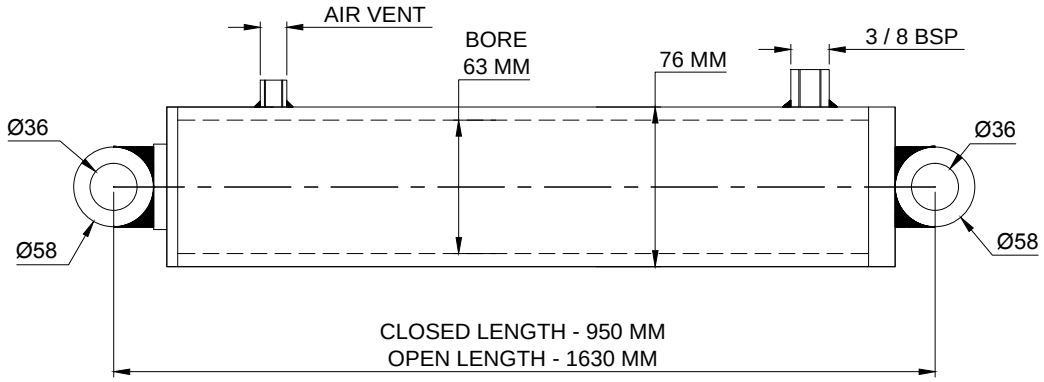

SPECIFICATION :-

- BORE :- Ø 63 mm
- STROKE :- 680 mm
- PISTON ROD :- Ø 45 mm (SHAFT DIA)
- MOUNTING :- WELDED TYPE BOTH END
- MEDIUM :- HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :- 3 / 8 BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 80'C (DEPENDING ON SEAL)

STROKE TOLERANCE :-0 TO +0.5mm

NOTE :
CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE				
LIFT CYLINDER				NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	NAME	SIGN	DATE	
DRAWN	P.A		09.11.2019	CLIENT -
CHECK	V.T		09.11.2019	PROJECT -
APPRD.				SITE LOCATION -
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/19-20/VDR/211 REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01