NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PROJECT PROPOSAL

NIHVA TECHNOLOGIES PVT. LTD.

187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

Customer Name	**Trident Group**
Project Name	**Trident Group**
Project Location	**Budni (Dist – Sehore) Madhya Pradesh** & **Barnala , Punjab**
Contact Person Name	Mr. Shailesh Laddha
Email Id	ShaileshLaddha@tridentindia.com
Contact Number	+91-8349801046

Contact Person: Ms. Varsha
Mob No.: 8551091333
Email id: support@nihva.com
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Dear Sir,

Thank you for your enquiry. Please find below our offer for our NIHVA make Telescopic Belt Conveyor.

100% design and manufactured by NIHVA at PUNE.

We trust that this will meet with your approval and if you have any queries please do not hesitate to contact us.



Technical Details of Telescopic Conveyor

Overall Dimensions	
Overall closed length	6000mm standard
Total extended length	19000mm standard
Cantilevered length	13000mm standard
General Specification	
Height to top of belt	850mm minimum
Belt width	600mm nom.
Belt type	Smooth face PVC top, 2 ply
Belt joint	Vulcanized joint
Belt drive	Geared motor unit
Telescopic drive	Synchronized positive chain drive
Loading Capacity	
Per metre	40kg/metre
Control & Operation	
Main supply	415v, 3ph rated at 20amps (per conveyor) 50hz
Main supply connection	Isolated supply to be provided by the customer to control panel
Control voltage	24v dc

Emergency stops	1-off front boom
Belt speed	30m/min. Inverter controlled
Belt direction	Reverse (unloading)
Belt controls	Start / stop push-buttons
Extend/Retract speed	0.25m/sec
Extend control	Push button on front boom
Retract control	Push button on front boom
Up/Down movement	N/a
Traverse movement	Control station and handle

General Information

Type of front boom	Impact plate
Mounting type	Mobile powered chassis
Color specification	RAL Customer to confirm



Included in Specification

Boom end lights	LED light units mounted in the front boom providing illumination in the vehicle, the lights automatically switch on when boom extends and switch off when the booms are fully retracted.
Audible warning	Audible warning to alert operator of impending belt starts.
Impact strip	Anti-collision strip fitted at the front of the boom which causes the machine to retract should it encounter an obstacle at the front of the machine.
Impact plate	5mm thick impact plate fitted to the front of the machine to take impact from product being dropped onto the machine.
Inverter on belt drive	Progressive acceleration of belt up to running speed and controlled stop used when the belt will be subject to regular start / stop operation.
Chain sensors	Sensors positioned in main casing to detect if boom drive chains slacken due to a fault. When active, sensors stop the machine preventing further damage.
Underside covers	Painted sheet steel covers fitted to all telescopic sections to prevent operators from touching internal moving parts of the machine.

Additional Items

Mobile powered chassis	Heavy duty chassis fitted to machine enabling machine to be moved. This is facilitated by two motors and a control handle. The chassis is fully counterbalanced so no extra support is required. Ideal for traversing between doors and storing out of the way.
Rear pop-out roller	Interlocked roller fitted to rear. When sensor activated, belt stops preventing injury. Front pop-out roller is included as standard.

Additional Items to Standard Specification

Mechanical Description	Qty
Low level rear stands top pivot, pair	1
Hydraulic rams+ power pack low level	1
Powered mobile counterbalanced chassis (Tiller type)	1
Electrical Description	**Qty**
Belt inverter 1.5kw	1
P.E.C. Parcel Counter / index PEC, includes cover	
Reversible Belt	1
Rear pop out roller, inc sensors	1
Cable Reeling Drum (15m)	1

System Operating Parameters

For the purpose of this proposal it is assumed that the system is in use 8 hrs per day, 40 hrs per week, 52 weeks per year.

Environmental conditions are dry, with no adverse fluctuations in temperature or humidity generally between 0 and +35 deg C.



NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Commercial offer: -

Sr. No.	Description	Qty	Rate In INR	Net Amount INR
1	Conveyor Type: Telescopic Conveyor Total Length: 18000 mm Fixed Length: 6000 mm Extended Length: 12000 mm Belt width: 600 mm Capacity: 40 kg / Meter	1	2,885,000	2,885,000
2	Conveyor Type: Telescopic Conveyor Total Length: 16500 mm Fixed Length: 5500 mm Extended Length: 11000 mm Belt width: 600 mm Capacity: 40 kg / Meter	3	2,475,000	7,425,000

Terms and Conditions: -

Price : Ex. Works Pune

P & F : 3 % Extra at the time of delivery.

Freight Notes : Extra as applicable.

Delivery : Within 10- 12 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval.

Payment Terms : 80% advance along with confirmed purchase order balance before dispatch.

Insurance : Extra as applicable.

GST : As Applicable on total supply value.

Validity : 15 days from date of quotation.

Warranty : 12 months from date of supply.


Technical Specifications:

Cost efficiencies.

Belt drive system

The belt drive system is energy and therefore cost efficient for the following reasons:

- Drive drum is lagged with a 15mm thick diamond pattern rubber coating
- Belt is driven on the top surface of belt to give maximum drive efficiency as opposed to driving on the underside which has a low coefficient of friction. This means that we do not require as much tension on the belt which in turn reduces the amount of power required from the motor to drive the belt.

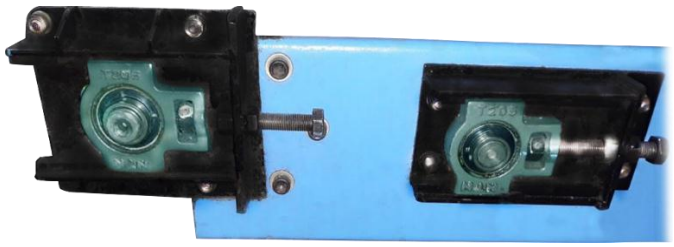

Belt Tensioning system

Reduced cost of ownership

Furthermore, all drive parts are easily accessible through side and rear covers so for service purposes there is easy access.

Because of this easy accessibility the maintenance per year can be reduced significantly. Also, the repairs that are needed can be done easier and quicker.



Motors used in the conveyors

SEW Efficient motors are a standard component in the vehicle loaders. NIHVA uses SEW motors as SEW is taking the lead in the race to reduce carbon emissions by supplying IE2 motors as its standard solution now.

LED Lights


LED lights are an energy efficient way of illuminating the workspace inside vehicles. LED lights are positioned in various places to ensure maximum light output is achieved, which do not dazzle the operators. 600mm long strip LED lights are fitted in the front and down the side of the front boom, the light emits a fan shaped light.





Control panel

Therefore, we have designed a special control panel for each operation both side front side as well back side.

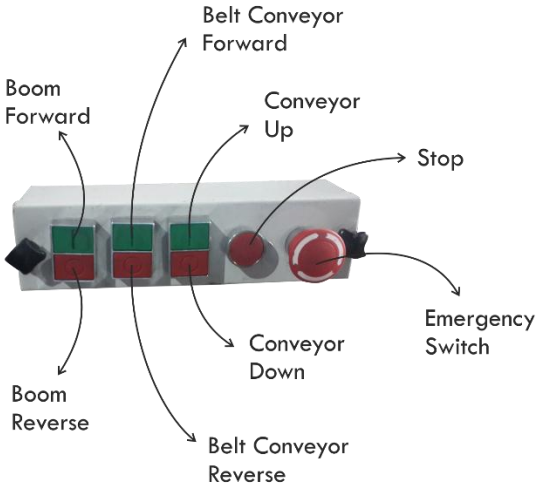




Safety & Ergonomic features

Front boom section

conveyors have front end sections that are very safe and ergonomically designed. They are mounted standard with the following.

- Deep section to cope with the daily arduous task of impact loading.
- Push buttons ergonomically positioned at 45 degrees to allow the operator to clearly see which button is being pressed
- Pop-out roller is electrically switched on outfeed application for added safety for the operator.
- All push buttons are protected by a 5mm thick steel cover plate

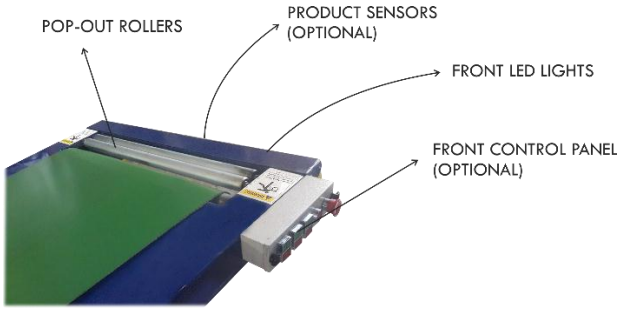

Please feel free to contact **Mr. Vijay Tarak - 08551093333** For any further Clarification /Information in this concern