

Prinzipzeichnung
RapidRoll 300 plus


General Drawing RapidRoll 300 plus

ALBANY
ASSA ABLOY

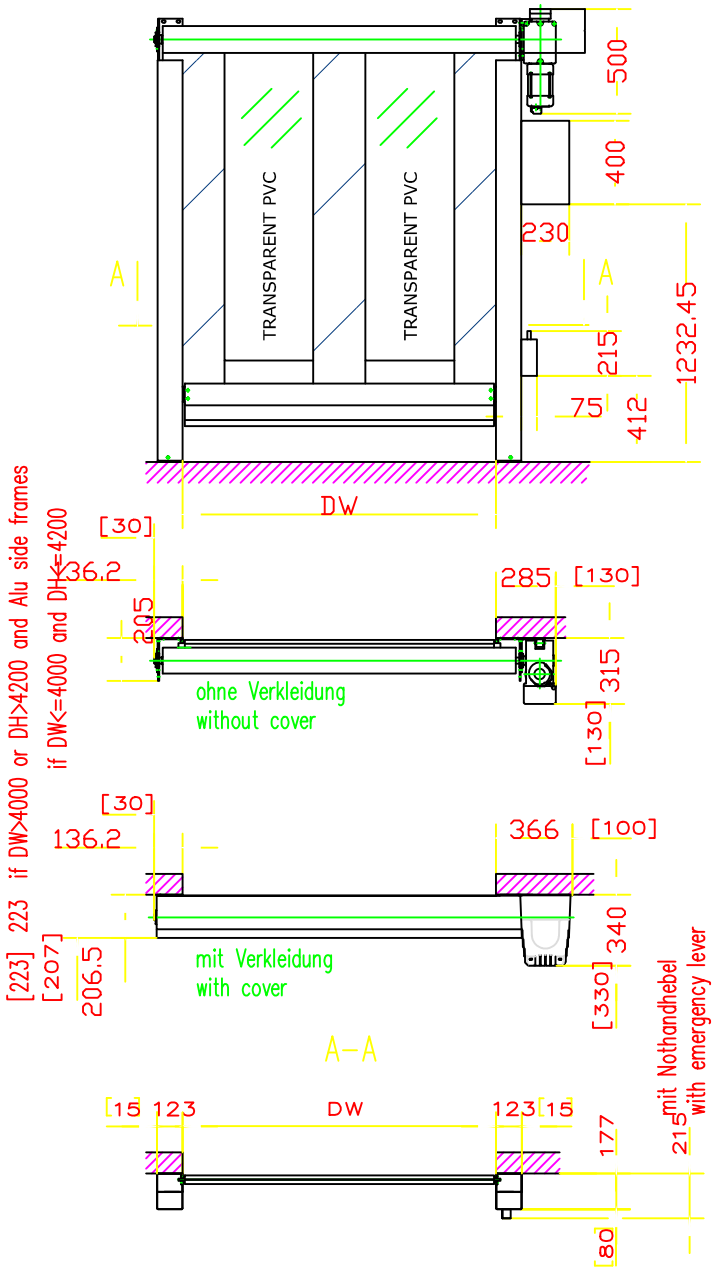


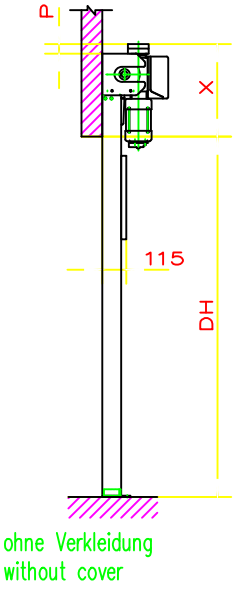

ohne Verkleidung
without cover



Motorverkleidung
motor cover



Motor- und Ballenverkleidung
Edelstahl - 30½/15½ Schr.ge

NOTE-
(1) MS STRUCTURE , FITTING & REQUIRED ALL CIVIL WORK IN CLIENT SCOPE.
(2) HIGH SPEED DOOR WILL BE ONLY INSTALLED AFTER READINESS OF STRUCTURE AS PER DRAWING PROVIDED.
(3) MOTOR SIDE RIGHT SIDE AS STANDARD , KINDLY INFORM IF LEFT SIDE.

TECHNICAL SPECIFICATIONS :
1. TRANSPARENT PVC WITH BLUE (RAL 5002) REINFORCEMENT STRIPES.
2. VERTICAL TRANSPARENT VISION PANEL.
3. SIDE FRAME - ALUMINUM PROFILES, ANODIZED.

Tolerance ±3 mm (for all dimensions)
Dimensions in [ ] ==> clearance for installation

SR NO	DW	DH	QUANTITY	MOTOR LOCATION
	DOOR DIMENSION			
1	2500	2500	1	
2	3000	3000	1	

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - RR300 PLUS ALU HSD

	NAME	SIGN	DATE
DRAWN	S.M.S.		12.12.20
CHECK	S.B.		12.12.20
APPROVED			

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - TRANS ENGG. PVT LTD
PROJECT - TRANS ENGG. PVT LTD
LOCATION - BANER , PUNE

If any queries contact:sales@nihva.com
DWG. NO. -NIHVA/20-21/0109
REV- R00

ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: