



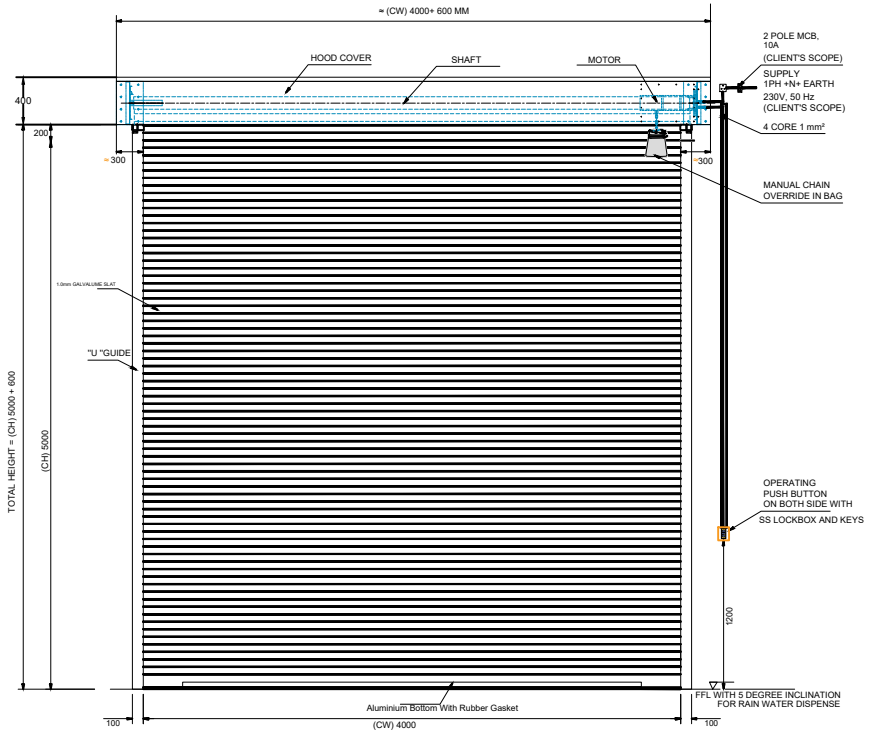

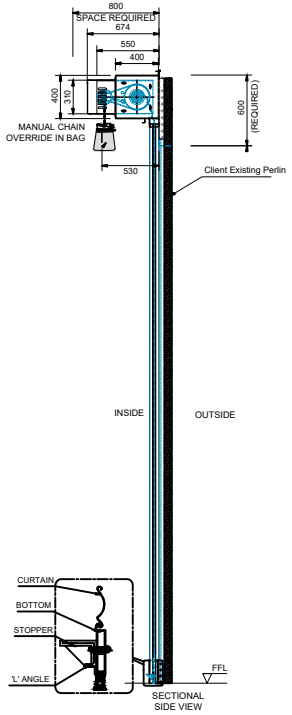

INSIDE ELEVATION

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside
3.	Mounting Surface	Side Brackets: M.S Structure (Client Scope)
4.	Slat	Curved 75 mm Galvalume Slat - 1.0 mm Thk.
5.	Bottom Profile	Aluminium Bottom With Rubber Gasket
6.	Guide Profile	M.S." U " Shape profile 75 x 2 mm Thk.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Accessories	Push Button On One SIde,Nyloflet seals fitted on shutter skin
9.	Surafce Finish & Painting	Primer & Duco Paint (Matt Finish) Color Shed-Light Blue RAL 5012

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4000	5000	01

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :-
MOTORISED ROLLING
SHUTTER

	NAME	DATE

REV-01

SCALE: NTS | WT: | SHEET: 01 OF 01

ALL DIMENSION ARE IN mm