NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

Project Name: Endress + Hauser Flowtec (India) Pvt. Ltd.


Technical Specifications

Sr. No	Product Name	Model No	Make	Pages
A.	High Speed Door	HS9020G	ASSA ABLOY	1
B.	Sectional Door	OH1042P	ASSA ABLOY	2
C.	Retractable Dock Shelter	DS6060A	ASSA ABLOY	3
D.	Swing Dock Leveler	DL6010S	ASSA ABLOY	3
E.	Scissor Lift		NIHVA	4
F.	Single Skinned Motorised Rolling Shutter		NIHVA	4
G.	Double Skinned Motorised Rolling Shutter		Teckentrup	4
H.	Telescopic Sliding Gate		NIHVA	4
I.	Wicket Gate		NIHVA	4
J.	Flap Barrier		NIHVA	4

A) High Speed Door **Internal Application**




HS9020G




SIDE GUIDES



Safety Facilities



Sr. No	Description	Specifications
1	Size	(W) 4000 mm X (H) 4000 mm
2	Quantity	7 Nos
3	Structure	Galvanized steel
4	Colours	8 standard colors - white, yellow, green, orange, red, gray, black, blue
5	Safety	**• Photocells in side columns** **• Flexible soft bottom edge including wireless edge activator** **• Break-away and self-repair function**
6	Operation	Operator + control unit
7	Operating speed	Opening: up to 1,2 m/s (optional 2,0 m/s) ; Closing: 0,5 m/s
8	Wind load resistance	Class 1 (300 Pa (N/m²)) maximum wind load while closing 50 N/m²
9	Air permeability	Class 1 (24 m³/m²/h at 50 Pa)
10	Water penetration	Class 2 (50 Pa (N/m²))
11	Thermal transmittance	6,02 W/(m²K)
12	Lifetime expectations	1.000.000 cycles
13	Temperature working range	5 °C to +40 °C
14	Vision window	**Horizontal one row of height 400 mm at eye level**
15	Radar Sensor 	An infrared sensor above the door detects an object (person, vehicle) within a specified distance from the door and opens the door automatically. This is an ideal solution for frequent vehicle or personal traffic.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019


An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM


B) Sectional Door




OH1042P



LOW LIFT
(head room < 500mm)



Vertical Lift
(head room > 2 x height)



Sr. No	Description	Specification
1	Size	(W) 2500 mm X (H) 4000 mm (W) 4000 mm X (H) 4000 mm
2	Quantity	9 Nos
3	Vision Windows	2 Nos at central panel
4	Opening Direction & Mounting	Standard Lift
6	Opening/Closing Speed	CDM9 0,28 m/s
7	Door Material	GI Steel
8	Panel Thickness	42 mm Square Grid, steel sheet
9	Filling	CFC-free polyurethane
10	Panel colour	RAL 9002 Grey White Powder coated
11	Door sealent	All door sealants made of EPDM rubber, temperature resistant -30/+70
12	Panel Flame Retardent standrad	Flame retardant polyurethane foam according DIN4102-class B2.
13	Water Penetration	EN 12425 class 3
14	Air Permealibity	EN12426 class 3
15	Wind Load	EN21424 class 3
16	Thermal Transittance	EN 12428 1.10W /m2K
17	Bottom sealing	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
18	Door saftey	Doors equiped with spring break device
19	Incase of Power failuer	Doors to be equiped with quick release fuction
20	Operator power conumption	Operator to have a maximum power consumption of 0,37kW and a standby consumption of Maximum 15W
21	Drive Unit & Mounting Type	Single phase 230V direct drive on shaft
22	Emergency Operation	by Disengagement rope manual
23	Operating Switch	Up/Down Keypad + stopbutton
24	Locks : Lock bolt	The Lock bolt locks the door from the inside, without the use of a key. The Lock bolt is not visible from the outside.
25	Environmental Green Product Declaration Certification	As per ISO 14025 and EN 15804
26	Interlocking 	Developed for climate control & safety; If door A is open, door B cannot be opened. If door B is open, door A cannot be opened.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

C) Retractable Dock Shelter



Retractable Dock Shelter




Docking System (Sectional Door, Dock Leveler, Dock Shelter)

Sr. No	Description	Specification
1	Size	(W) 3450 mm x (H) 3400 mm
2	Quantity	4 Nos
3	Curtain colour	Black
4	Parking Guides	White, Yellow
5	Wall Fixings	Concrete, Sandwich light Concrete, Load house cavity, insulated panel
6	Top & Side Curtaiins	Double Layer High Quality Polyester
7	Thickness	3.0 mm
8	Weight	Approx 3400 g/m2
9	Continous Roof Cover	One layer high quality Polyester
10	Thickness	0.5 mm
11	**Front White Patch**	**Reflective strips**

D) Swing Dock Leveler







Safeguard emergency stop with two cylinders.

Sr. No	Description	Specification
1	Size	Option 1 : (W) 2000 mm x (H) 2500 mm Option 2 : (W) 2000 mm x (H) 3000 mm
2	Quantity	4 Nos
3	Capacity	15 T
4	Control Unit Protection Class	IP54
5	European Standards	EN 1398
6	Coating	RAL 5010, Hot dip galvanized
7	Control unit	Supervision 105, 105A, i105, i305 Service & fault Indicator
8	Vertical working range Rise above dock Fall below dock	250 - 620 mm 270 - 350 mm
9	Platform tear-plate thickness with platform reinforcements according to the load capacity	6/8, 8/10 mm
10	Lip material & length	Steel, 400 / 500 mm
11	Nominal voltage	400V 3-phase

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

E) Scissor Lift



Sr. NO	Description	Specification
1	Capacity	15 Ton
2	Platform Size	(W) 2000 mm X (L) 2500 mm Qty : 4
3	Shut Ht	1000 mm
4	Max Ht	2200 mm
5	Lift Ht	1200 mm
6	Safety Railing	Safety railing M.S SECTION 900 mm ht all side on platform & fixed
7	Manual Lip	3 Piece(240 + 1500 + 240) - 1 Side Only
8	Maintenance Stopper	2 NOS
9	Fabrication	3500 KGS
10	Push Button Pendent	Flexible pendent with 5 mtr Cable - 1 No
11	Control Panel	Outside pit - 1 No
12	**Safety Bellow**	All side
13	Power Pack Inside Pit with Buzzer	15 HP, 3 Phase - Eaton make
14	Hydraulic Cylinder	Two numbers with Bore 150 X stroke 500 mm - Eaton make
15	**Hot Dip Galvanised**	IS 2629 / EN ISO 1461 / As per ASTM
16	Hose	Parker Hoses
17	Hardware	
18	Cable	Polycab cables
19	Hydraulic Oil	Grade 68 - 125 Ltr
20	Paint	Glossy - 20Ltr

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

F) Single Skinned Motorised Rolling Shutter



Sr. No	Description	Specification
1	Size	(W) 2500 mm x (H) 4000 mm Qty: 4 (W) 4000 mm x (H) 4000 mm Qty: 8
2	Roller shutter curtain profile type	Flat Profile Galvalume
3	Mounting Location area	Inside area / Outside area
4	Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side
5	Curtain Panel	The panel made of 1.0mm thick Galvalume
6	Curtain panel size	75mm wide
7	Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
9	Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	Side Brackets	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	Hood Cover	Made of GI Sheet Thickness 0.9 mm
12	Surface finish	without paint


G) Motorised Rolling Shutter : Teckentrup Rolling Shutter

Double-skinned Teckentrup roller shutter made from PU-foamed steel profiles.



Sr. No	Description	Specification
1	Size	(W) 2500 mm x (H) 4000 mm Qty: 4 (W) 4000 mm x (H) 4000 mm Qty: 8
2	Roller shutter curtain profile type	ThermoTeck steel filled with PU-foam
3	Mounting Location area	Inside area / Outside area
4	Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side
5	Curtain Panel	double-skinned Teckentrup roller shutter made from PU-foamed steel profiles 19 mm Thick
6	Curtain panel size	96 mm Hieght
7	Bottom Profile	ET-1 for Teckentrup ThermoTeck
8	Side Guide Profile	FS 85 steel
9	Roller Shaft	octagonal tube galvanised
10	Side Brackets	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	Hood Cover	Made of GI Sheet Thickness 0.9 mm
12	Surface finish	without paint

H) Motorised two leaf Telescopic Gate

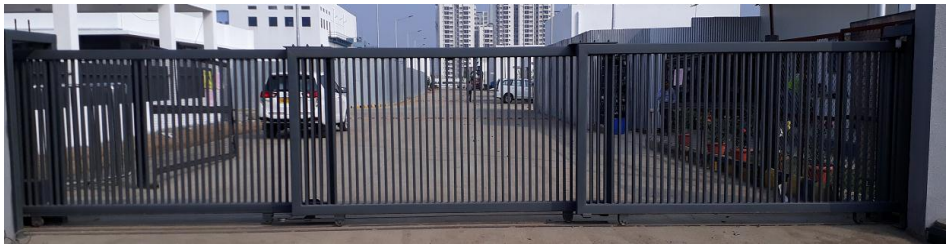

Sr. No	Description	Specification
1	Door type	Motorized Two Leaf Telescopic Sliding Gate
2	Size considered	Clear opening - (W) 6000 mm x (H)1800 mm
3	Opening Direction	Horizontal - from left to right or reverse
4	Mounting Location area	Inside area
5	Design Pattern	Standard Tubular Design Pattern
6	Outer Frame Tube Sizes	80 x 80 x 3.2 mm
7	Internal Vertical Tube Sizes	40 x 40 x 2 mm
8	Gap Between Tubes	100 mm C/C
9	Bottom Rail on ground	dia 20 mm round bright bar with heavy duty support ISMB 100 X 50 Beams
10	Bottom Rollers	Heavy Duty Bottom Wheel With both side Bearings (chorme plated)
11	Guide Rollers supporter during Gate movement	Nylon Rollers with Bearings both side mounted on column for support smooth movement of gate
12	Painting	2 Coats of EPOXY polyamide based enamel finish of approved colour
13	El motor make	BFT – Italy (100% imported)
14	Operating Switch	Push Button from inside
15	Operation	By Telescopic Mechanism
16	Safety	Photocells, Flashing Light

I) Manual Wicket Gate




Sr. No	Description	Specification
1	Door type	Manual Single Leaf Wicket Gate
2	Size considered	Clear opening - (W)1200 mm x (H)1800 mm
3	Mounting Location area	Inside area
4	Design Pattern	Standard Tubular Design Pattern
5	Outer Frame Tube Sizes	80 x 80 x 3.2 mm
6	Internal Vertical Tube Sizes	40 x 40 x 2 mm
7	Gap Between Tubes	100 mm C/C
8	Painting	2 Coats of EPOXY polyamide based enamel finish of approved colour
9	Operation	Manually Opening

I) Flap Barrier

- **Single Sided Flap Gate:**

Sr. No	Description
1	It has zero position of self -checking, easy for users to maintain and use.
2	There is alarm notice funtion when illegal access.
3	Standard wiring connection: can connect with many kinds of card readers, and can remote control through the computer.
4	Avoid bump funtion: When the turnstile does not receive the open signals, the baffle will lock automatically.
5	High throughput, Bi-directional control, Open / Close light indication
6	Optical beams for safety movements, Ensures rapid, efficient & safe access control
7	Easily integrated into access control system, Automatic reset of barrier flap after each valid entry, mechanical release key for emergency cases, fire trigger input facility. In the even of power failure panels can be specified to remain closed
8	Reseng automatically: the passenger read effectively, the system will cancel this access authority if they will not access in certain time.
9	IR/mechanical dual anti-lined funtion: When the baffle has problem in resending, it will stop working automatically in certain time, and the potency is small, will make an alarm sound at the same time.
10	The whole system works steadily, and the noise is very low. Size: 1400 x 280 x 980mm; Unlock time: 0.2s Pass rate: 35 person/min; Pass Width: ≤550mm; Input: 100V~240V; Driving Voltage: 24v; Environment: -25~70°c; Power Consumption: 35w.

- **Double Sided Flap Gate :**

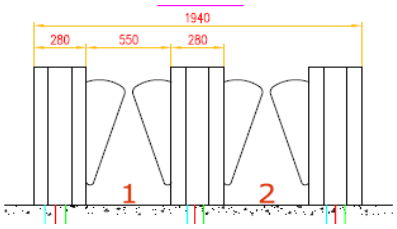

Sr. No	Description
1	It has zero position of self -checking, easy for users to maintain and use.
2	There is alarm notice funtion when illegal access.
3	Avoid bump funtion: When the turnstile does not receive the open signals, the baffle will lock automatically.
4	IR/mechanical dual anti-lined funtion: When the baffle has problem in reseding, it will stop working automatically in certain time, and the potency is small, will make an alarm sound at the same time.
5	Reseng automatically: the passenger read effectively, the system will cancel this access authority if they will not access in certain time.
6	Standard wiring connection: can connect with many kinds of card readers, and can remote control through the computer.
7	High throughput, Bi-directional control, Open / Close light indication
8	Optical beams for safety movements, Ensures rapid, efficient & safe access control
9	Easily integrated into access control system, Automatic reset of barrier flap after each valid entry, mechanical release key for emergency cases, fire trigger input facility. In the even of power failure panels can be specified to remain closed
10	The whole system works steadily, and the noise is very low. Size: 1400 x 280 x 980mm; Unlock time: 0.2s Pass rate: 35 person/min; Pass Width: ≤550mm; Input: 100V~240V; Driving Voltage: 24v; Environment: -25~70°c; Power Consumption: 35w; Input: 12v dry contact.