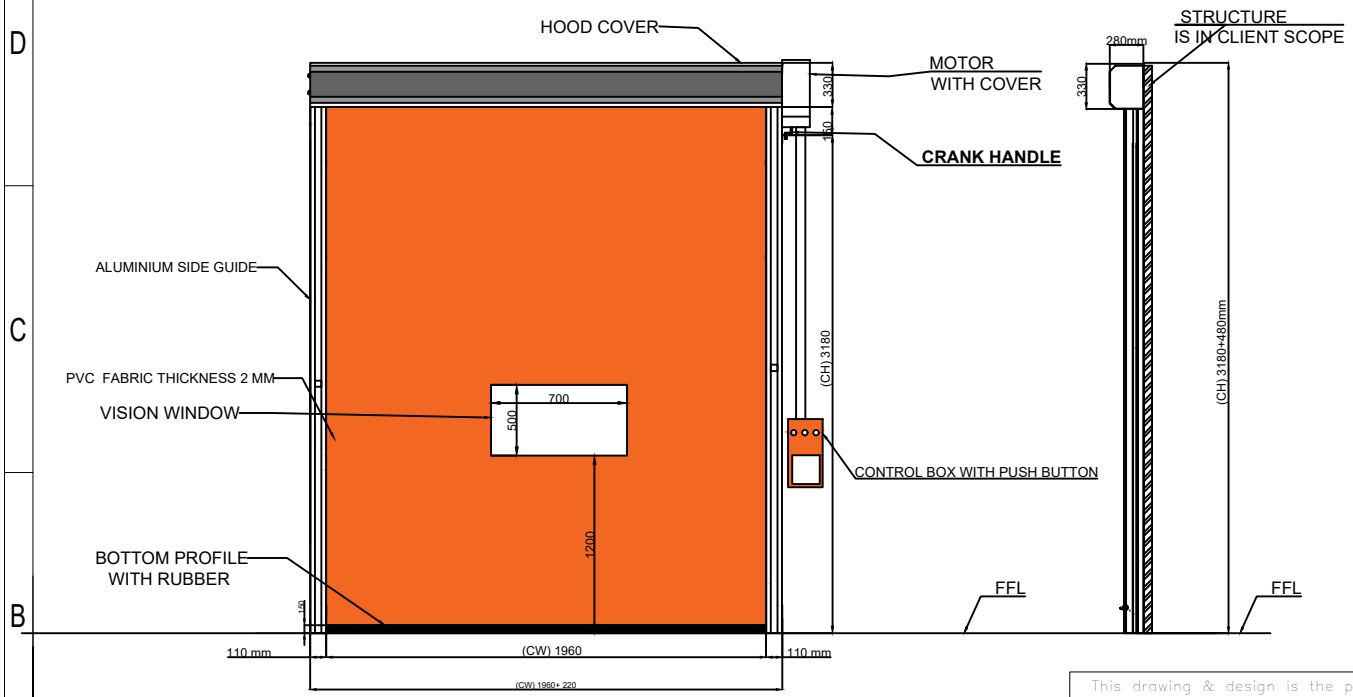


TECHNICAL SPECIFICATION :

SR.	SPECIFICATIONS	DETAILS
1	USE	INTERNAL DOOR
2	MOUNTING	ON STRUCTURE: INSIDE / OUTSIDE
3	CURTAIN PANEL	PVC FABRIC THICKNESS 2 MM
4	MANUAL RELEASE	CRANK HANDLE
5	DOOR TRAVEL SPEED	OPENING: UPTO 1.5M/SEC & CLOSING: 0.8 M/SEC
6	SAFETY DEVICE	1800 MM HEIGHT LIGHT CURTAIN
7	ACCESSORIES	THREE WAY PUSH BUTTON
8	RAL CODE	ORANGE

HIGH SPEED ROLL UP DOOR SIZES :-

SR	CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QTY
1	**2180**	**3180**	01

NOTE :-

1. All DIMENSIONS ARE IN MM.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

	NAME	SIGN	DATE
DRAWN	J.P		01.10.2025
CHECK	B.S		01.10.2025
APPRD.	V.T		01.10.2025

TITLE: HIGH SPEED DOOR

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - TENNECO CLEAN AIR

PROJECT - MACHINE PROTECTION DOOR

FORMAT NO - NIHVA-DD-F-03

If any queries contact : Design@nihva.com

DWG. NO. : NIHVA/24-25/MP/1308001 REV- R00

ALL DIMENSION ARE IN mm

SCALE: NTS WT: SHEET: