


NIHVA TECHNOLOGIES PVT. LTD.

NIHVA SELF PROPELLED SCISSOR LIFT
MODEL NO: (NH-SL-SP-12)

Technical Drawing: -

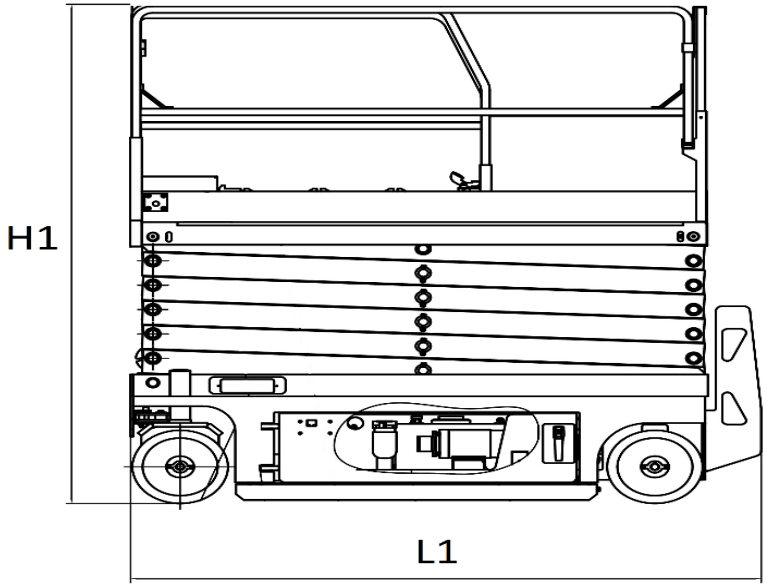

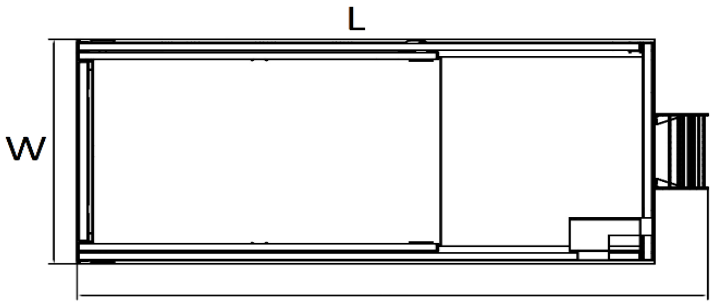

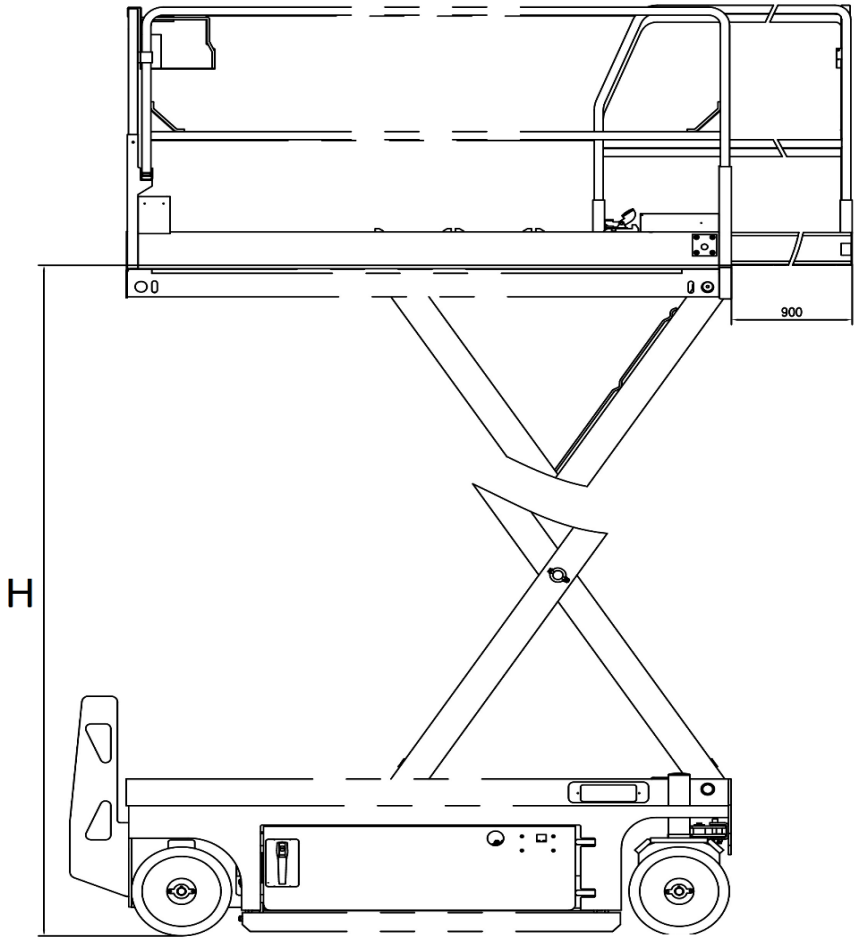

Features: -

- Proportional Control.
- Battery Driven no pollution. Low Noise.
- Suitable for variety of Operating Environment.
- Inter-lock door on Platform.
- Extension Platform.
- Automatic Brake System.
- Traceless Tyre.
- 4*2 Driving.
- Buzzer.
- Emergency Stop Button.
- Fault Diagnosis System.
- Automatic Pothole Protection.
- Fault Code Display System for Easy Maintenance.

Optional Features: -

- Airway tube to the Platform.
- Platform Working Light.
- Hydraulic Motor Drive.
- Extension Platform.
- AC Line to Platform.
- Buzzer + Alarm.

Technical Specification: -

Model No: - NH-SL-SP-12

Capacity	kg	320
Capacity on Extension	kg	113
Max. Worker Number	nos	2
Working Height	mtr	13.80
Platform Height (H)	mtr	11.80
Overall Length (L1)	mtr	2.43
Overall Width	mtr	1.15
Overall Height (Rails Up)	mtr	2.55
Overall Height (Rails Down)	mtr	2.03
Platform Size (L*W)	mtr	2.27*1.12
Platform Extension Size	mtr	0.90
Ground Clearance (Stowed)	mtr	0.10
Ground Clearance (Raised)	mtr	0.019

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA SELF PROPELLED SCISSOR LIFT
MODEL NO: (NH-SL-SP-12)

Wheelbase	mtr	1.87
Turning Radius (Inside)	mtr	0
Turning Radius (Outside)	mtr	2.20
Lift/Drive Motor	v/kw	24/4.5
Travel Speed (Stowed)	km/h	3.0
Travel Speed (Raised)	km/h	1
Raise/Lower Time	sec	70/45
Power Source	V/Ah	4*6/260
Charger	V/A	24/30
Gradeability	%	25
Maximum Working Slope	°	1.5/3
Tyre Size	mm	Ø380*129
Weight	kg	2830
Basic Price	Rs/per unit	13,40,000/-
Electrical & Pneumatic Connection on platform (EXTRA)	Rs/per unit	45000/-