

THIS PRINT IS THE PROPERTY OF NIHVA IT IS TO BE USED ONLY FOR THE PURPOSE FOR WHICH IT WAS LENT AND MUST NOT BE USED IN ANY WAY DERTIMENTAL TO THE INTEREST OF THIS COMPANY AND IS SUBJECT TO RETURN ON DEMAND.

| | |
|---|---|
| SHUTTER TYPE | HIGH QUALITY 2HRS FIRE SHUTTERS |
| SHUTTER SLATS | 1.0 mm ZINCALUME STEEL SOLID SLATS |
| FINISHING OF SLATS | POWER COAT STANDARD RAL COLOUR |
| GUIDE RAIL | GALVANIZED ,3mm THICK |
| FINISHING OF GUIDE | POWDER COAT STANDARD RAL COLOUR |
| BOTTOM BAR | T-120 |
| FINISHING OF B/BAR | POWDER COAT STANDARD RAL COLOUR |
| BOX DESIGN | MILD STEEL SECTION FRAME DESIGN |
| FINISHING OF BOX | POWDER COAT STANDARD RAL COLOUR |
| BOX COVER PLATE | 0.8mm ZINCALUME STEEL SHEET |
| FINISHING OF COVER | POWDER COAT STANDARD RAL COLOUR |
| OPERATION | MOTORIZE WITH MANUAL OVERRIDE CHAIN |
| MOTOR POWER SOURCE | 230 VOLTS,1 PHASE,50HZ |
| FIRE MODE | THERMAL FUSIBLE LINK WILL AUTO CLOSE BY GRAVITY FORCE |
| | WHWN ROOM TEMP RISES UP TO 71°C |
| | ERS-EMERGENCY RELEASE SYSTEMS READY TO RECEIVED24VDC |
| | FIRE SIGNAL FROM FIRE CONTROL ROOM AND SHUTTER |
| | SHALL CLOSE DOWN BY GRAVITY FORCE WITHOUT DELAY |


| LOCATION | SHUTTER NO. | CLEAR WIDTH (STRUCTURE) | CLEAR WIDTH (STRUCTURE) | QUANTITY | MOTOR POSITION |
|---|---|---|---|---|---|
| | FRS | 5000 mm | 5000 mm | 5 | RH |



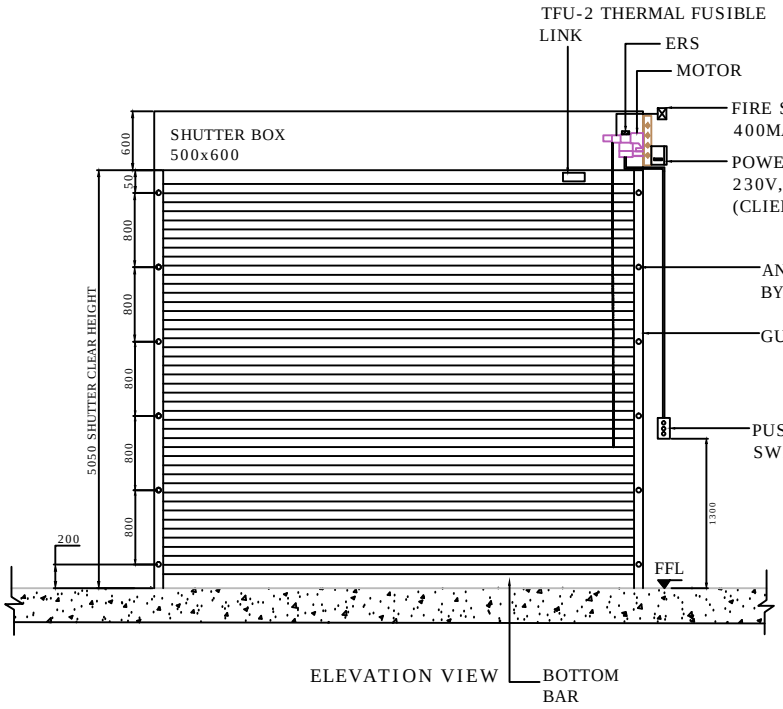

GALVANISED STEEL GUIDE RAIL
THICKNESS 3mm



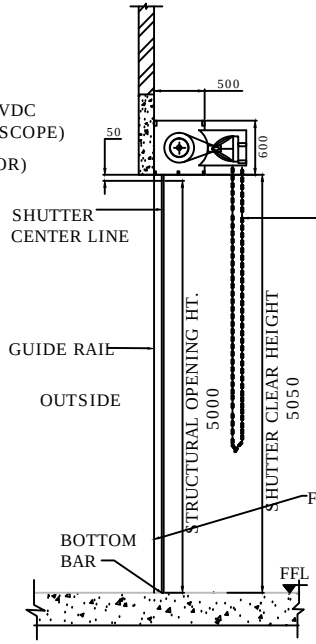

SHUTTER SLAT



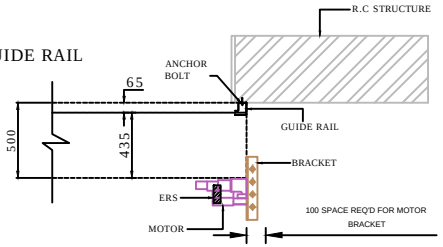

FIRE RATED BOTTOM BAR



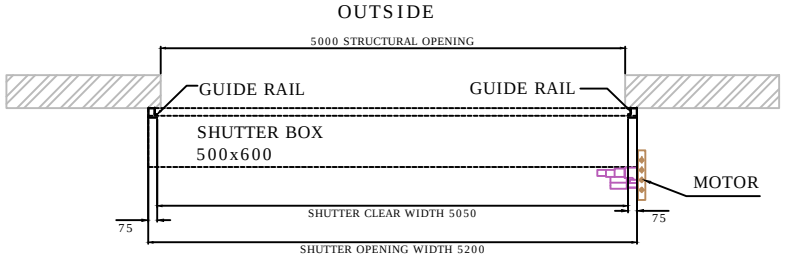

ELEVATION VIEW




SIDE VIEW




GUIDE & MOTOR ASSEMBLY DETAILS




INSIDE
PLAN VIEW

TITLE: FIRE RATED MOTORIZED ROLLING SHUTTER

CLIENTS APPROVAL:-

All DIMENSIONS ARE IN MM.

If any queries contact: projects@nihva.com

QUANTITY:-

DRAWN: OMKAR
CHECK: ANIL
ENG
APPRD.
PROD
MFG
DATE :-16/04/2016

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. Pune:-411044
Tel :- 020 66304033
Email :- info@nihva.com

CLIENT: SHAPOORJI PALLONJI
PROJECT : NEW HOLLAND
SITE:
PRODUCT NAME: MOTORISED ROLLING SHUTTER
DWG. NO.: NIHVA/16-17/0002
REV.: 00
SCALE: 1:1
WT:
SHEET: