
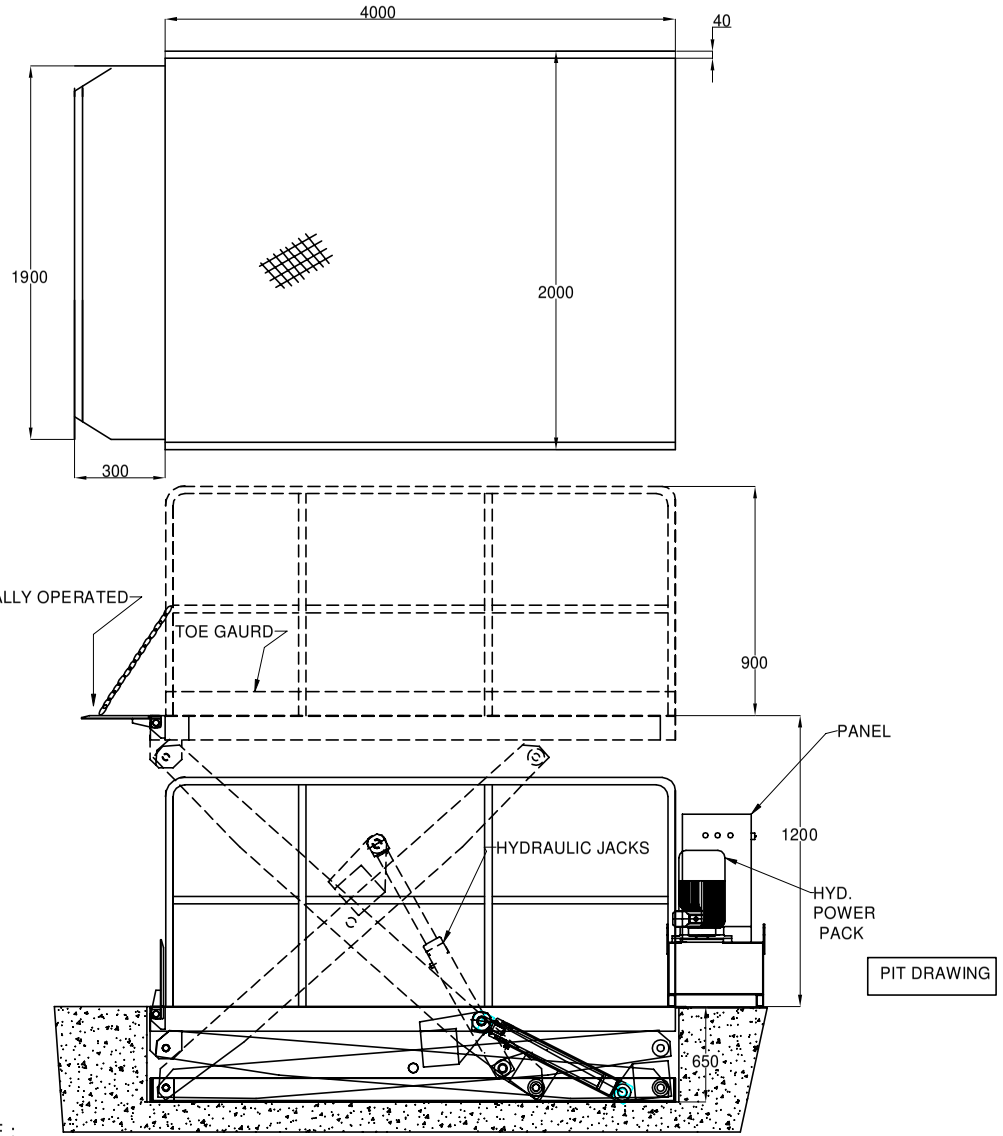


PIT DRAWING

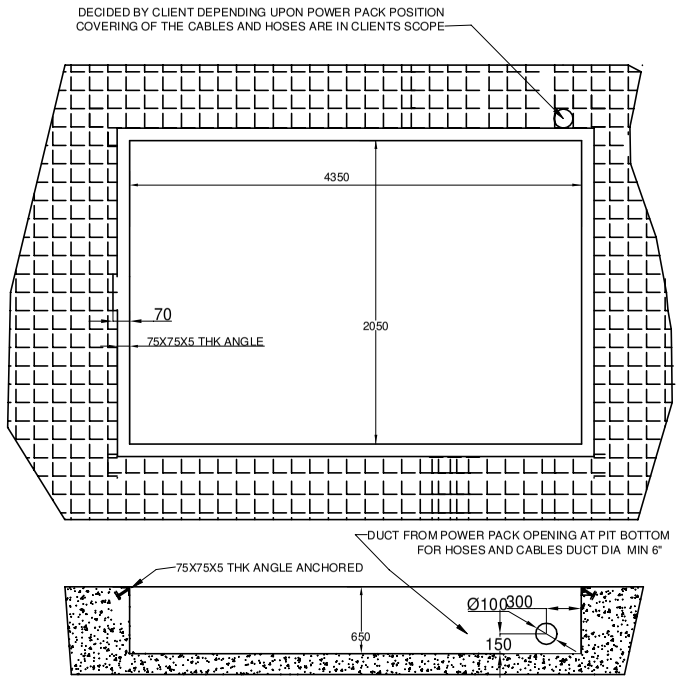

NOTE :
1. PIT FOR SCISSOR LIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR HOSES, PANEL , AND CABLES RELATED CIVIL WORK IS IN CLIENTS SCOPE ALSO PROPER DRAINAGE SYSTEM SHOULD BE PROVIDED FOR THE PIT.

Specifications

	Equipment		Scissors Lift	
Dimensions	Rated Capacity		W Kgs	5000
	Platform	Length	mm	4000
		Width	mm	2000
	Overall	Length	mm	4250
		Width	mm	2000
	Heights			
		Closed	mm	650
		Lift	mm	1200
Drive	Lift Motor 3 Ph AC		H.P.	7.5
	Pendent			1 Nos
	Panel - Std Make, MCB, Simens Contactor, Transformer 24V AC/DC, LED Phase indicators			

EQUIPMENT - SCISSORS TABLE

TECHNOSYS EQUIPMENT PVT. LTD.
PLOT NO - 144, SECTOR 10,
PCNTDA BHOSARI , PUNE 411 026
Web :- www.technolift.in
E- mail :- technolift@technosysequipment.com