
# Spare part list
# RR 450

ALBANY
ASSA ABLOY



2013-05 Index 00

| | |
|---|---|
| Side frame right | RR450, 600, 600G |
| Seitenteil rechts | RR450, 600, 600G |
| | |
| | |

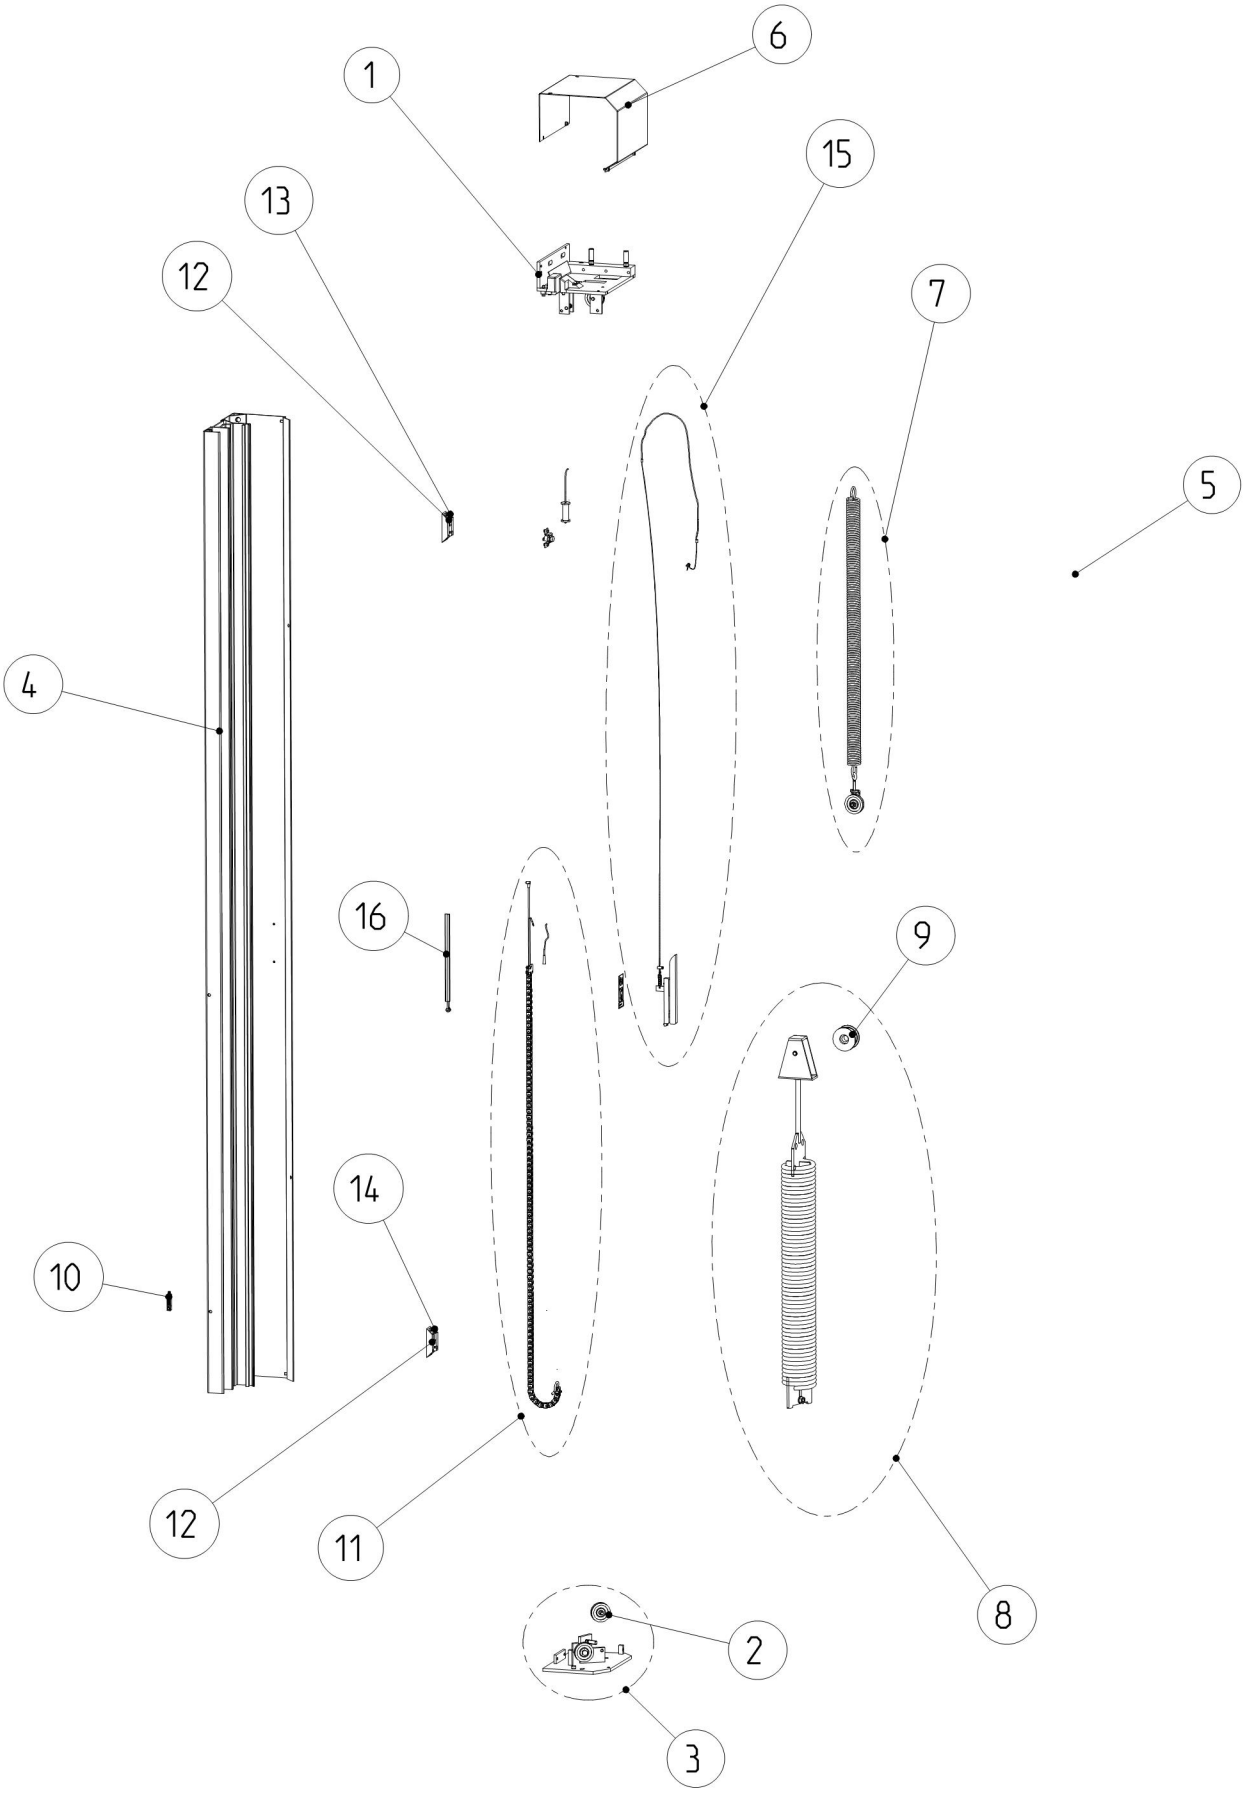


ALBANY
ASSA ABLOY

**RR 450, Version 35**

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **I** | **RH column** | | | | | | | | |
| | | | | | | | | | |
| | RH column cpl | | | D8520010 | G | C | | 1 | |
| | Base price | | | | | | Stck./pc. | | |
| | additional per m / h | | | | | | m / h | | |
| 1 | RH head plate | 600 G | | D8120037 | | B | Stck./pc. | 1 | |
| | RH head plate | 450/600 | | D8120031 | | B | Stck./pc. | 1 | |
| | RH head plate | 450/600 with wind bar | | D8120045 | | B | Stck./pc. | 1 | |
| | RH head plate | 600G with wind bar | | D8120039 | | B | Stck./pc. | 1 | |
| | RH head plate | 450EX | | D8120066 | | B | Stck./pc. | 1 | |
| | Bell mouth front right | | | D4121R0438 | | A | Stck./pc. | 1 | |
| | Bell mouth rear right | | | D4121R0436 | | A | Stck./pc. | 1 | |
| 2 | Rope roller | | | D8120004 | | A | Stck./pc. | 1 | |
| | Rope roller AL | crash | | D8120010 | | A | Stck./pc. | 1 | |
| 3 | RH ground plate | | | D8120035 | | B | Stck./pc. | 1 | |
| | RH ground plate crash | | | D8120033 | | B | Stck./pc. | 1 | |
| 4 | RH support profile standard | 450/600/600G | | D8220051 | G | B | m | 1 | |
| | RH support profile crash | 450/600 | | D8220001 | G | B | m | 1 | |
| | RH support profile | 450EX | | D8220100 | G | B | m | 1 | |
| | RH support profile standard | MCC | | D8220RG285 | G | B | m | 1 | |
| | RH support profile crash | | | D8220RG287 | G | B | m | 1 | |
| 5 | RH front cover | | | D8220039 | G | B | m | 1 | |
| | Rope 3,2; L=9500 | | only 450/600(G) 2009-11 ► | D5105R0091 | | A | Stck./pc. | 1 | |
| 6 | Covering cap | 450 plast or top or 600 plast | | D8160011 | | A | Stck./pc. | 1 | |
| | Covering cap | 600 top | | D8160014 | | A | Stck./pc. | 1 | |
| | Covering cap | 600G | | D8160012 | | A | Stck./pc. | 1 | |
| 7 | Tension spring with deflection horse | | | D8120026 | | B | Stck./pc. | 1 | |
| 8 | Counterbalance | DW<3m: 1 springs/door; DW>3m: 2 springs/door | 450/600(G) ►2009-10, all 450/600EX | D8220030 | G | B | | 1 | |
| | with spring 11mm Dm 110 L0 1682 | | | | | B | Stck./pc. | | |
| | with spring 11mm Dm 110 L0 2000 | | | | | B | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 1598 | | | | | B | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 2000 | | | | | B | Stck./pc. | | |
| | with spring 13mm Dm 101 L0 1784 | | | | | B | Stck./pc. | | |
| | with Spring 13mm Dm 114 L0 2000 | | | | | B | Stck./pc. | | |
| | Counterbalance | DW<3m: 1 springs/door; DW>3m: 2 springs/door | only 450/600(G) 2009-11 ► | D8220RG302 | G | B | | 1 | |
| | with spring 11mm Dm 110 L0 1682 | | | | | B | Stck./pc. | | |
| | with spring 11mm Dm 110 L0 2000 | | | | | B | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 1598 | | | | | B | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 2000 | | | | | B | Stck./pc. | | |
| | with spring 13mm Dm 101 L0 1784 | | | | | B | Stck./pc. | | |
| | with Spring 13mm Dm 114 L0 2000 | | | | | B | Stck./pc. | | |

| | |
|---|---|
| Side frame right | RR450, 600, 600G |
| Seitenteil rechts | RR450, 600, 600G |
| | |
| | |

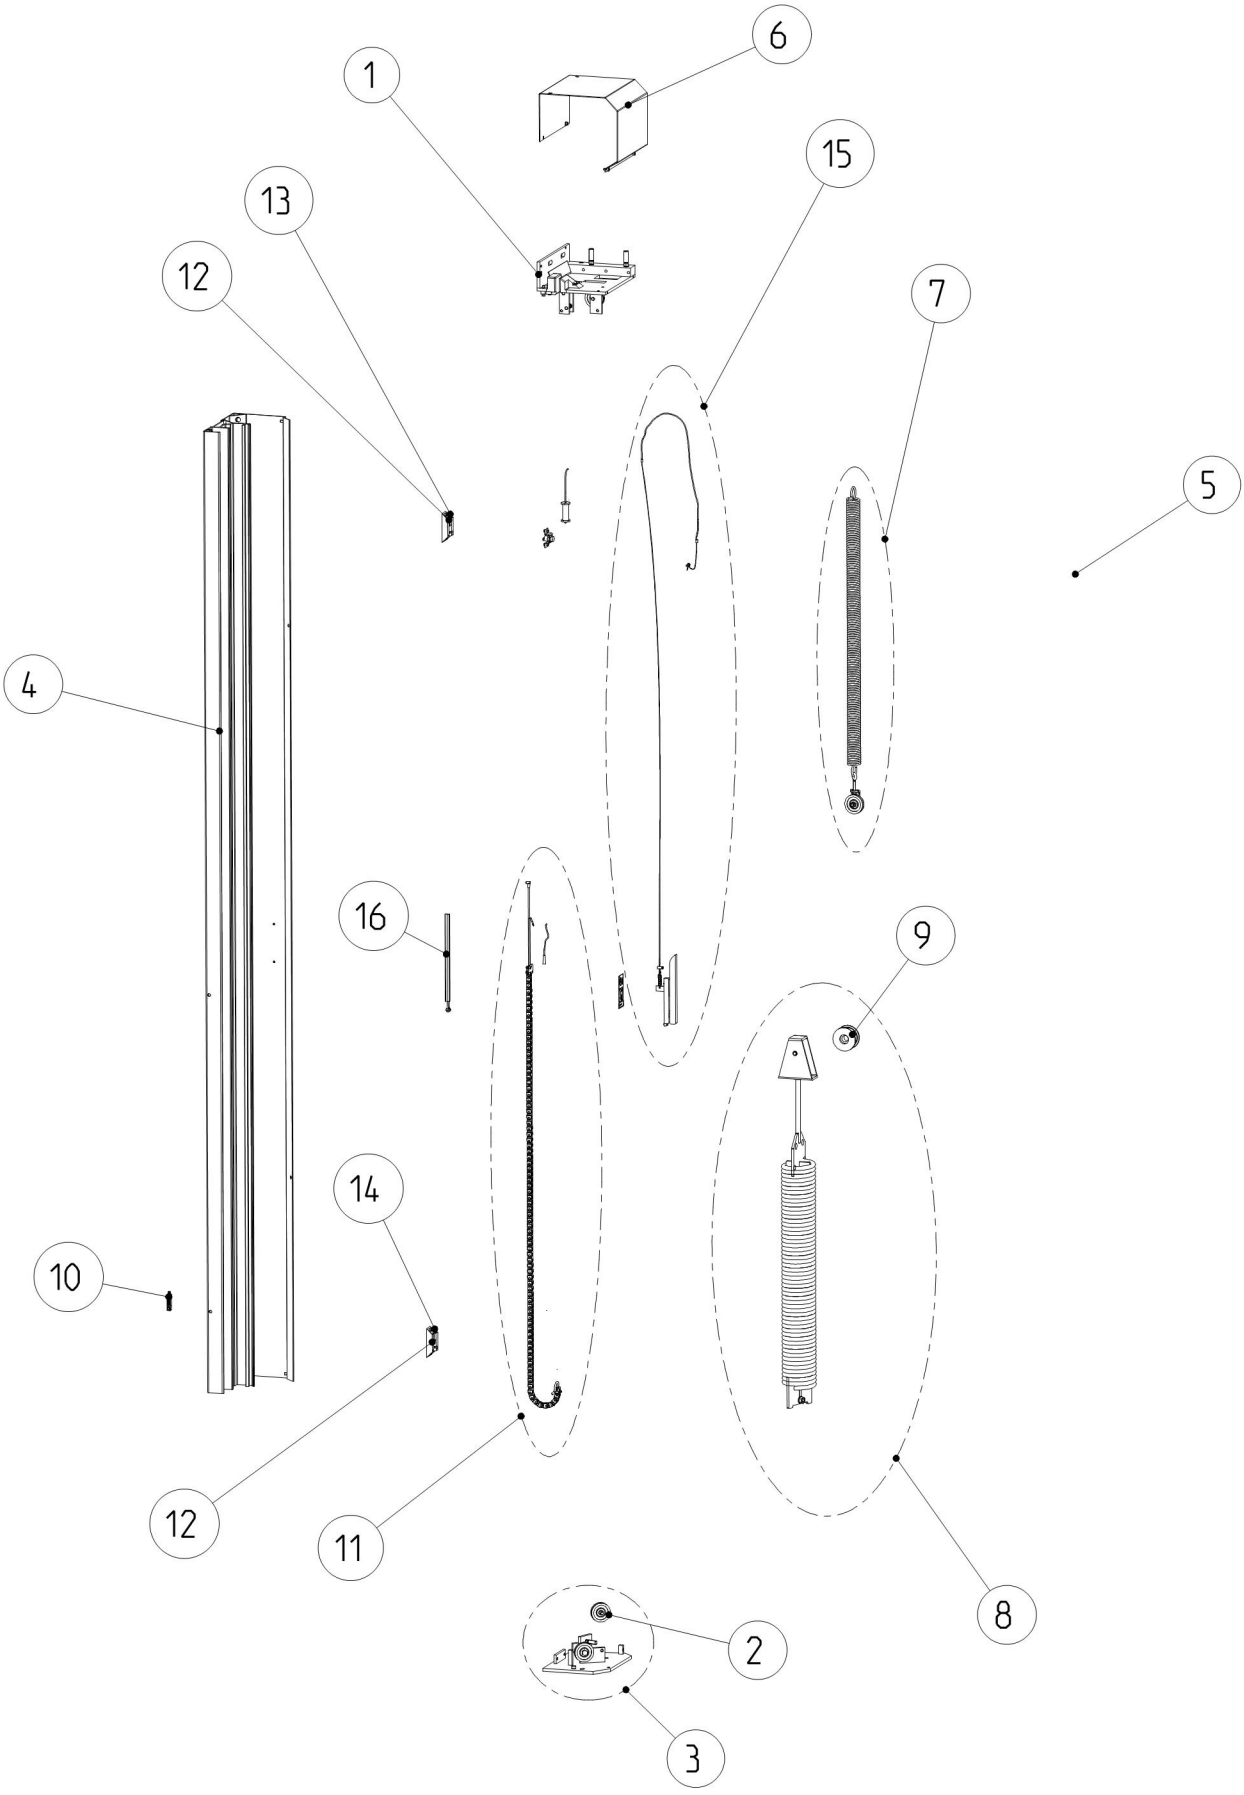


ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **I** | **RH column** | | | | | | | | |
| | | | | | | | | | |
| | Belt roller counterbalancing | | 450/600(G) ►2009-10, all 450/600EX | D4721R0150 | | B | Stck./pc. | 1 | |
| 9 | Belt roller counterbalancing | | only 450/600(G) 2009-11 ► not 450/600EX | D4721103 | | A | Stck./pc. | 1 | |
| | Rope d=7mm, L=15000mm, yellow | | | D5105R0085 | | A | Stck./pc. | 2 | x |
| | Bracket belt-rope | | | D4521172 | | A | Stck./pc. | 2 | |
| | Retrofit kit balancesystem belt to rope | | | D8120R0099 | | B | Stck./pc. | 1 | |
| | Photocell transm./rec. with bracket | RH + LH | | D8470R0026 | | A | Stck./pc. | max.1 | |
| | Photocell transmitter without bracket - blue | RH | | D4904R0547 | | A | Stck./pc. | 1 | |
| | Connecting cable 4000 mm | | | D4907R0024 | | A | Stck/pc | 1 | |
| | Connecting cable 6000 mm | | | D4907R0029 | | A | Stck/pc | 1 | |
| 10 | Connecting cable 8000 mm | | | D4907R0030 | | A | Stck/pc | 1 | |
| | Connecting cable 10000 mm | | | D4907R0032 | | A | Stck/pc | 1 | |
| | Connecting cable 12000 mm | | | D4907R0023 | | A | Stck/pc | 1 | |
| | Connecting cable 14000 mm | | | D4907R0031 | | A | Stck/pc | 1 | |
| | Trailing chain with cable | | | D8520008 | G | B | Stck./pc. | 1 | |
| | Trailing chain | | | D8150034 | G | B | Stck./pc. | 1 | |
| | Connecting cable 4000 mm | | | D4907R0024 | | A | Stck./pc. | 1 | |
| | Connecting cable 6000 mm | | | D4907R0029 | | A | Stck./pc. | 1 | |
| | Connecting cable 8000 mm | | | D4907R0030 | | A | Stck./pc. | 1 | |
| | Connecting cable 10000 mm | | | D4907R0032 | | A | Stck./pc. | 1 | |
| | Connecting cable 12000 mm | | | D4907R0023 | | A | Stck./pc. | 1 | |
| | Connecting cable 14000 mm | | | D4907R0031 | | A | Stck./pc. | 1 | |
| 11 | Connecting cable 4x0,25qm 4m | crash | | D4907R0074 | | A | Stck./pc. | 1 | |
| | Connecting cable 4x0,25qm 6m | crash | | D4907R0075 | | A | Stck./pc. | 1 | |
| | Connecting cable 4x0,25qm 8m | crash | | D4907R0076 | | A | Stck./pc. | 1 | |
| | Connecting cable 4x0,25qm 10m | crash | | D4907R0077 | | A | Stck./pc. | 1 | |
| | Connecting cable 4x0,25qm 12m | crash | | D4907R0079 | | A | Stck./pc. | 1 | |
| | Connecting cable 4x0,25qm 14m | crash | | D4907R0080 | | A | Stck./pc. | 1 | |
| | Trailing chain | 450EX drive LH | | D8520018 | G | B | Stck./pc. | 1 | |
| | Trailing chain | 450EX drive RH | | D8520017 | G | B | Stck./pc. | 1 | |
| 12 | RH proximity switch with bracket | | | D8420006 | | A | Stck./pc. | 1 | |
| | Proximity switch Ex with bracket | 450EX/600EX, MCC | | D8420R0019 | | A | Stck./pc. | 1 | |
| 13 | cable L=1000mm | MCC, ACS50, ACS80, FUS, PLS-GT, MPS | | D4907R0082 | | A | Stck./pc. | | |
| | cable L=4000mm | SPS, without control | | D4907R0024 | | A | Stck./pc. | | |
| | Cable for limit switch bottom (only side of unit) | ACS50, PLS-G DH<=2700 | | D4907R0024 | | A | Stck./pc. | 1 | |
| | Cable for limit switch bottom (only side of unit) | ACS50, PLS-G DH<=4700 | | D4907R0029 | | A | Stck./pc. | 1 | |
| | Cable for limit switch bottom (only side of unit) | ACS50, PLS-G DH<=6700 | | D4907R0030 | | A | Stck./pc. | 1 | |
| | Cable for limit switch bottom (only side of unit) | ACS50, PLS-G DH<=8700 | | D4907R0032 | | A | Stck./pc. | 1 | |
| 14 | Cable for limit switch bottom (only side of unit) | SPS, without control DH<=2500 | | D4907R0024 | | A | Stck./pc. | 1 | |
| | Cable for limit switch bottom (only side of unit) | SPS, without control DH<=4500 | | D4907R0029 | | A | Stck./pc. | 1 | |
| | Cable for limit switch bottom (only side of unit) | SPS, without control DH<=6500 | | D4907R0030 | | A | Stck./pc. | 1 | |
| | Cable for limit switch bottom (only side of unit) | SPS, without control DH<=8500 | | D4907R0032 | | A | Stck./pc. | 1 | |
| 15 | Emergency lever | 450/600/600G | | D8220R0055 | | B | Stck./pc. | 1 | |
| | Emergency lever | 450EX/600EX | | D8220R0053 | | B | Stck./pc. | 1 | |

| | |
|---|---|
| Side frame right | RR450, 600, 600G |
| Seitenteil rechts | RR450, 600, 600G |
| | |
| | |

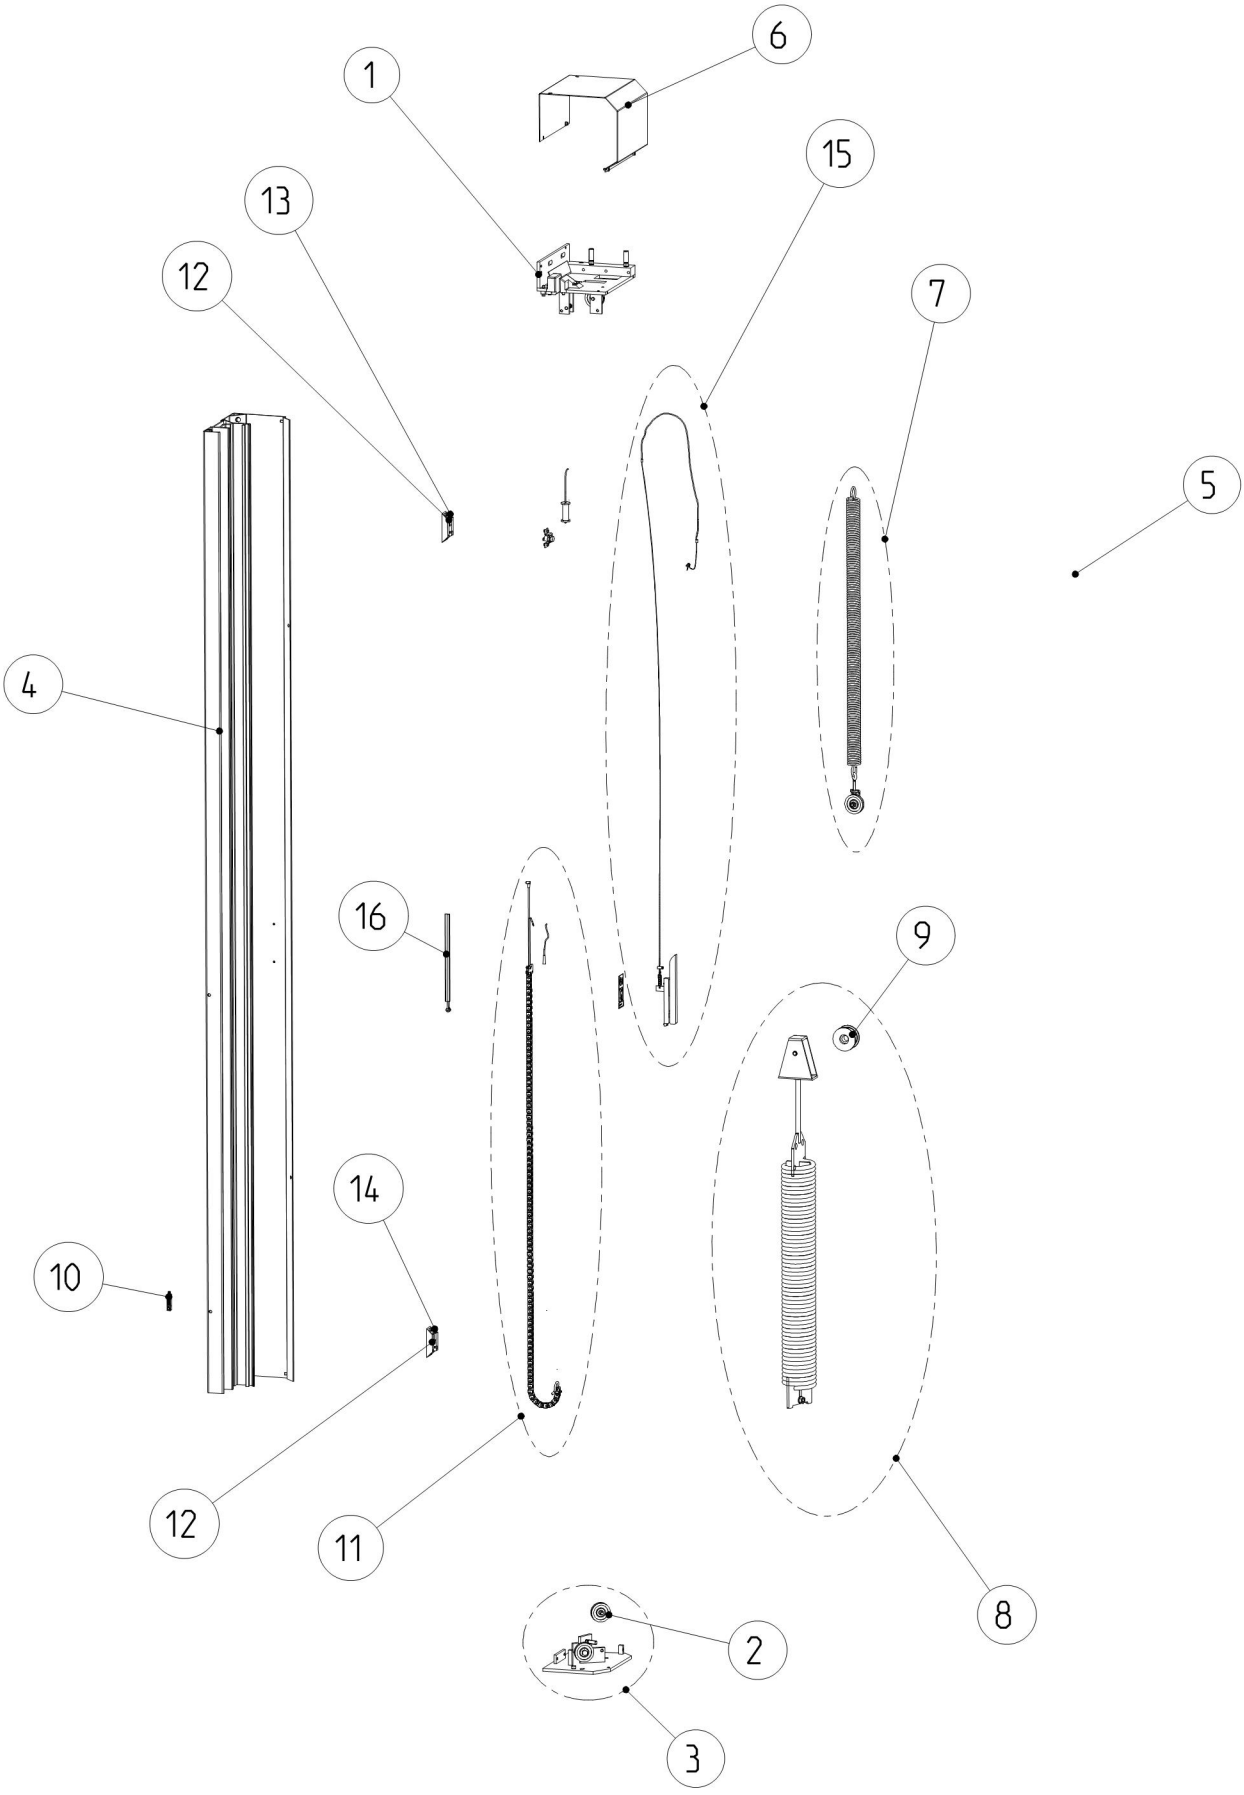


ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **II** | **LH column** | | | | | | | | |
| | | | | | | | | | |
| | LH column | | | D8520011 | G | C | | 1 | |
| | Base price | | | | | | Stck./pc. | | |
| | additional per m / h | | | | | | m / h | | |
| 1 | LH head plate | 600 G | | D8120038 | | B | Stck./pc. | 1 | |
| | LH head plate | 450/600 | | D8120032 | | B | Stck./pc. | 1 | |
| | LH head plate | 450/600 with wind bar | | D8120046 | | B | Stck./pc. | 1 | |
| | LH head plate | 600G with wind bar | | D8120040 | | B | Stck./pc. | 1 | |
| | LH head plate | 450EX | | D8120067 | | B | Stck./pc. | 1 | |
| | Bell mouth front left | | | D4121R0439 | | A | Stck./pc. | 1 | |
| | Bell mouth rear left | | | D4121R0437 | | A | Stck./pc. | 1 | |
| 2 | Rope roller | | | D8120004 | | A | Stck./pc. | 1 | |
| | Rope roller AL | crash | | D8120010 | | A | Stck./pc. | 1 | |
| 3 | LH ground plate standard | 450/600/600G | | D8120036 | | B | Stck./pc. | 1 | |
| | LH ground plate crash | 450/600 | | D8120034 | | B | Stck./pc. | 1 | |
| 4 | LH support profile standard | 450/600/600G | | D8220052 | G | B | m | 1 | |
| | LH support profile crash | 450/600 | | D8220002 | G | B | m | 1 | |
| | LH support profile | 450EX | | D8220101 | G | B | m | 1 | |
| | LH support profile standard | MCC | | D8220RG286 | G | B | m | 1 | |
| | LH support profile crash | | | D8220RG288 | G | B | m | 1 | |
| 5 | LH front cover | | | D8220038 | G | B | m | 1 | |
| | Rope 3,2; L=9500 | | only 450/600(G) 2009-11 ► | D5105R0091 | | A | Stck./pc. | 1 | |
| 6 | Covering cap | 450 plast or top and 600 plast | | D8160011 | | A | Stck./pc. | 1 | |
| | Covering cap | 600 top | | D8160014 | | A | Stck./pc. | 1 | |
| | Covering cap | 600G | | D8160012 | | A | Stck./pc. | 1 | |
| 7 | Tension spring with deflection horse | | | D8120026 | | B | Stck./pc. | 1 | |
| 8 | Counterbalance | DW<3m: 1 springs/door DW>3m: 2 springs/door | 450/600(G) ►2009-10, all 450/600EX | D8220030 | G | B | | 1 | |
| | with spring 11mm Dm 110 L0 1682 | | | | | | Stck./pc. | | |
| | with spring 11mm Dm 110 L0 2000 | | | | | | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 1598 | | | | | | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 2000 | | | | | | Stck./pc. | | |
| | with spring 13mm Dm 101 L0 1784 | | | | | | Stck./pc. | | |
| | with Spring 13mm Dm 114 L0 2000 | | | | | | Stck./pc. | | |
| | Counterbalance | DW<3m: 1 springs/door; DW>3m: 2 springs/door | only 450/600(G) 2009-11 ► | D8220RG302 | G | B | | 1 | |
| | with spring 11mm Dm 110 L0 1682 | | | | | B | Stck./pc. | | |
| | with spring 11mm Dm 110 L0 2000 | | | | | B | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 1598 | | | | | B | Stck./pc. | | |
| | with spring 12mm Dm 111 L0 2000 | | | | | B | Stck./pc. | | |
| | with spring 13mm Dm 101 L0 1784 | | | | | B | Stck./pc. | | |
| | with Spring 13mm Dm 114 L0 2000 | | | | | B | Stck./pc. | | |

| | |
|---|---|
| Side frame right | RR450, 600, 600G |
| Seitenteil rechts | RR450, 600, 600G |
| | |
| | |

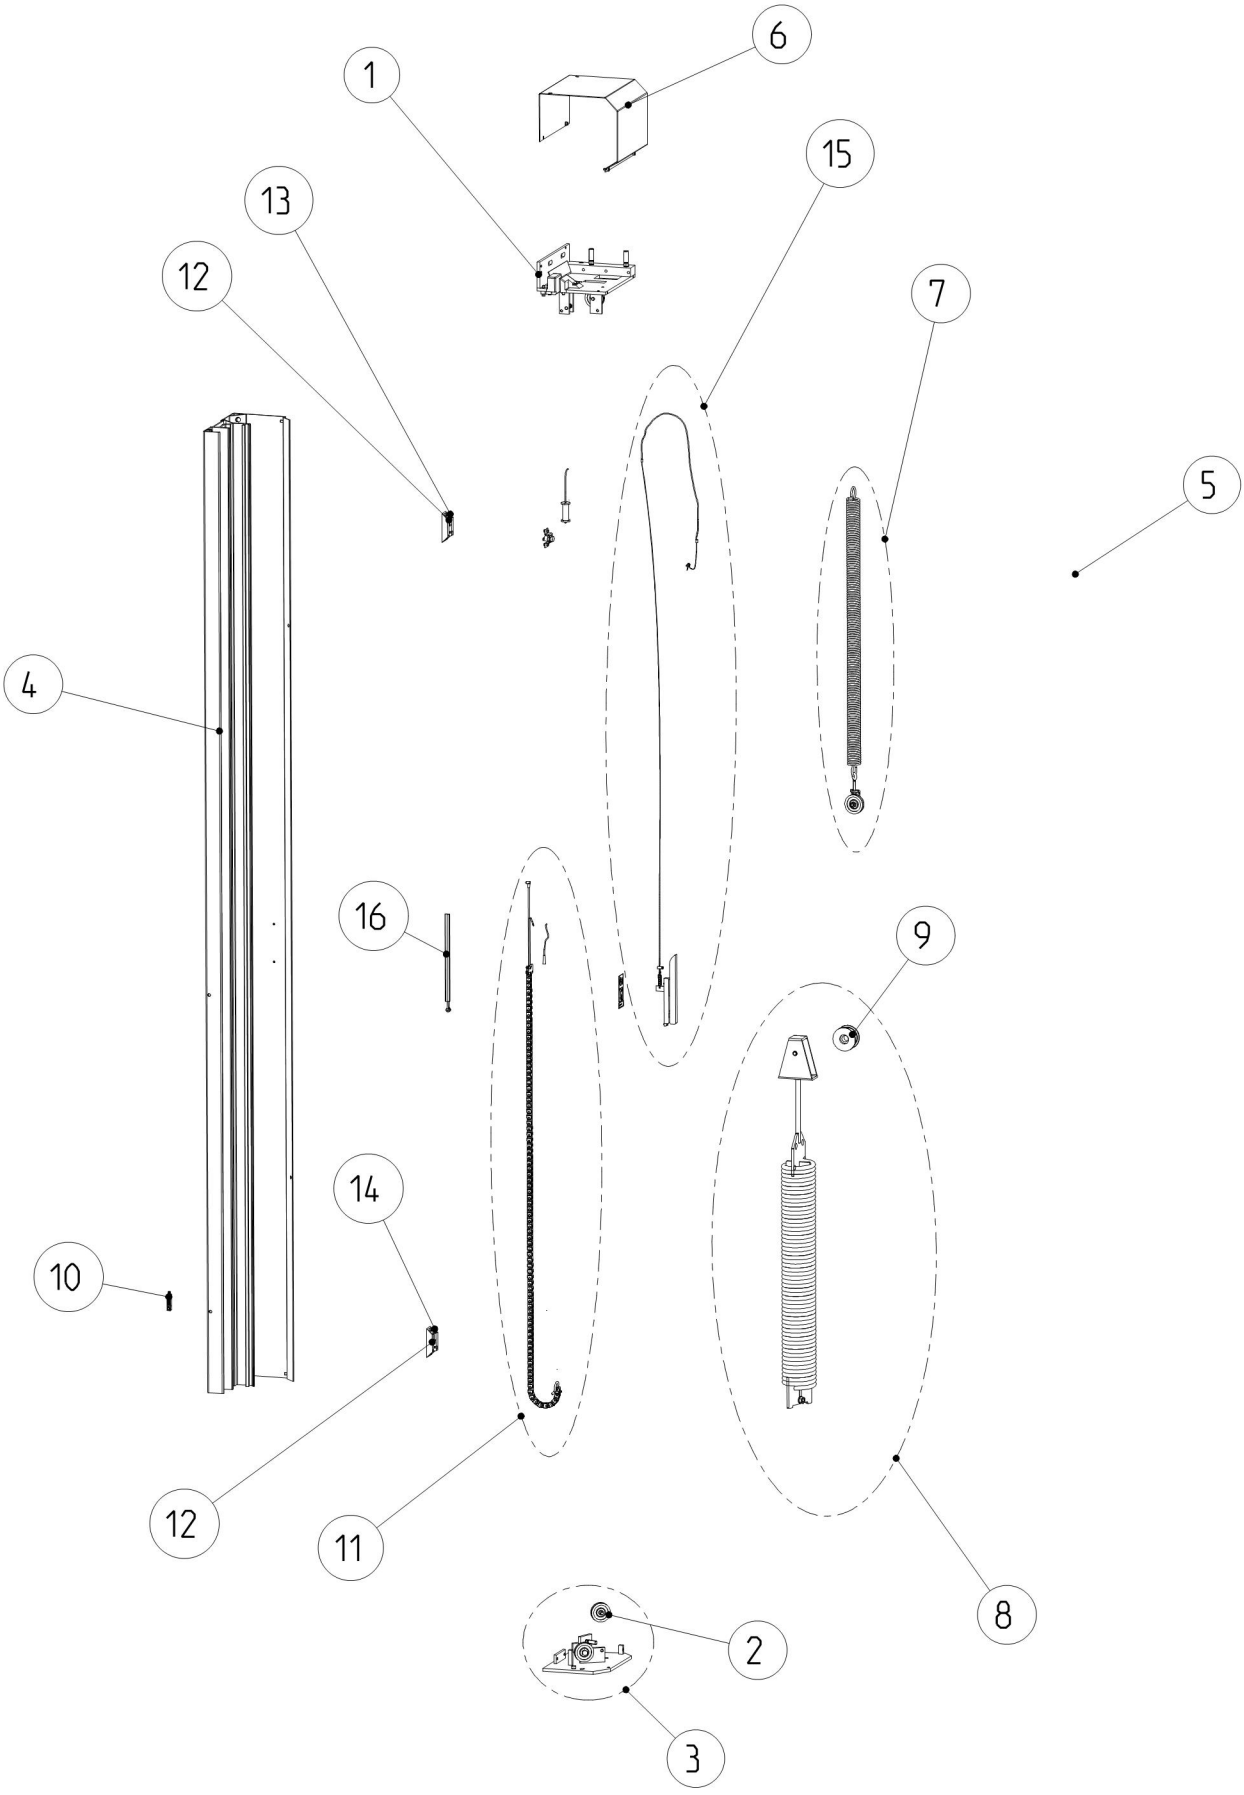


ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **II** | **LH column** | | | | | | | | |
| | | | | | | | | | |
| 9 | Belt roller counterbalancing | | 450/600(G) ►2009-10, all 450/600EX | D4721R0150 | | A | Stck./pc. | 1 | |
| | Belt roller counterbalancing | | only 450/600(G) 2009-11 ► not 450/600EX | D4721103 | | A | Stck./pc. | 1 | |
| | Rope d=7mm, L=15000mm, yellow | | | D5105R0085 | | A | Stck./pc. | 2 | x |
| | Bracket belt-rope | | | D4521172 | | A | Stck./pc. | 2 | |
| | Retrofit kit balancesystem belt to rope | | | D8120R0099 | | B | Stck./pc. | 1 | |
| 10 | Photocell transm./rec. with bracket | RH + LH | | D8470R0026 | | A | Stck./pc. | max.1 | |
| | Photocell receiver without bracket - black | LH | | D4904R0548 | | A | Stck./pc. | 1 | |
| | Connection cable as above RH column | see sideframe RH | | | | | | | |
| 11 | Trailing chain with cable | | | D8520009 | G | B | Stck./pc. | 1 | |
| | Trailing chain | | | D8150034 | | B | Stck./pc. | 1 | |
| | Connection cable as above RH column | see sideframe RH | | | | | | | |
| | Trailing chain | 450EX drive LH | | D8520017 | | B | Stck./pc. | 1 | |
| | Trailing chain | 450EX drive RH | | D8520018 | | B | Stck./pc. | 1 | |
| 12 | LH proximity switch with bracket | | | D8420005 | | A | Stck./pc. | 1 | |
| | Proximity switch Ex with bracket | 450EX/600EX, MCC | | D8420R0019 | | A | Stck./pc. | 1 | |
| 13 | cable L=1000mm | MCC, ACS50, ACS80, FUS, PLS-GT, MPS | | D4907R0082 | | A | Stck./pc. | 1 | |
| | cable L=4000mm | SPS, without control | | D4907R0024 | | A | Stck./pc. | 1 | |
| 14 | Cable L=4000mm | see sideframe RH | | | | | Stck./pc. | 1 | |

| | |
|---|---|
| Top roll with curtain | |
| Wickelwelle mit Torbehang | |
| Valsrör med portblad | |
| | |

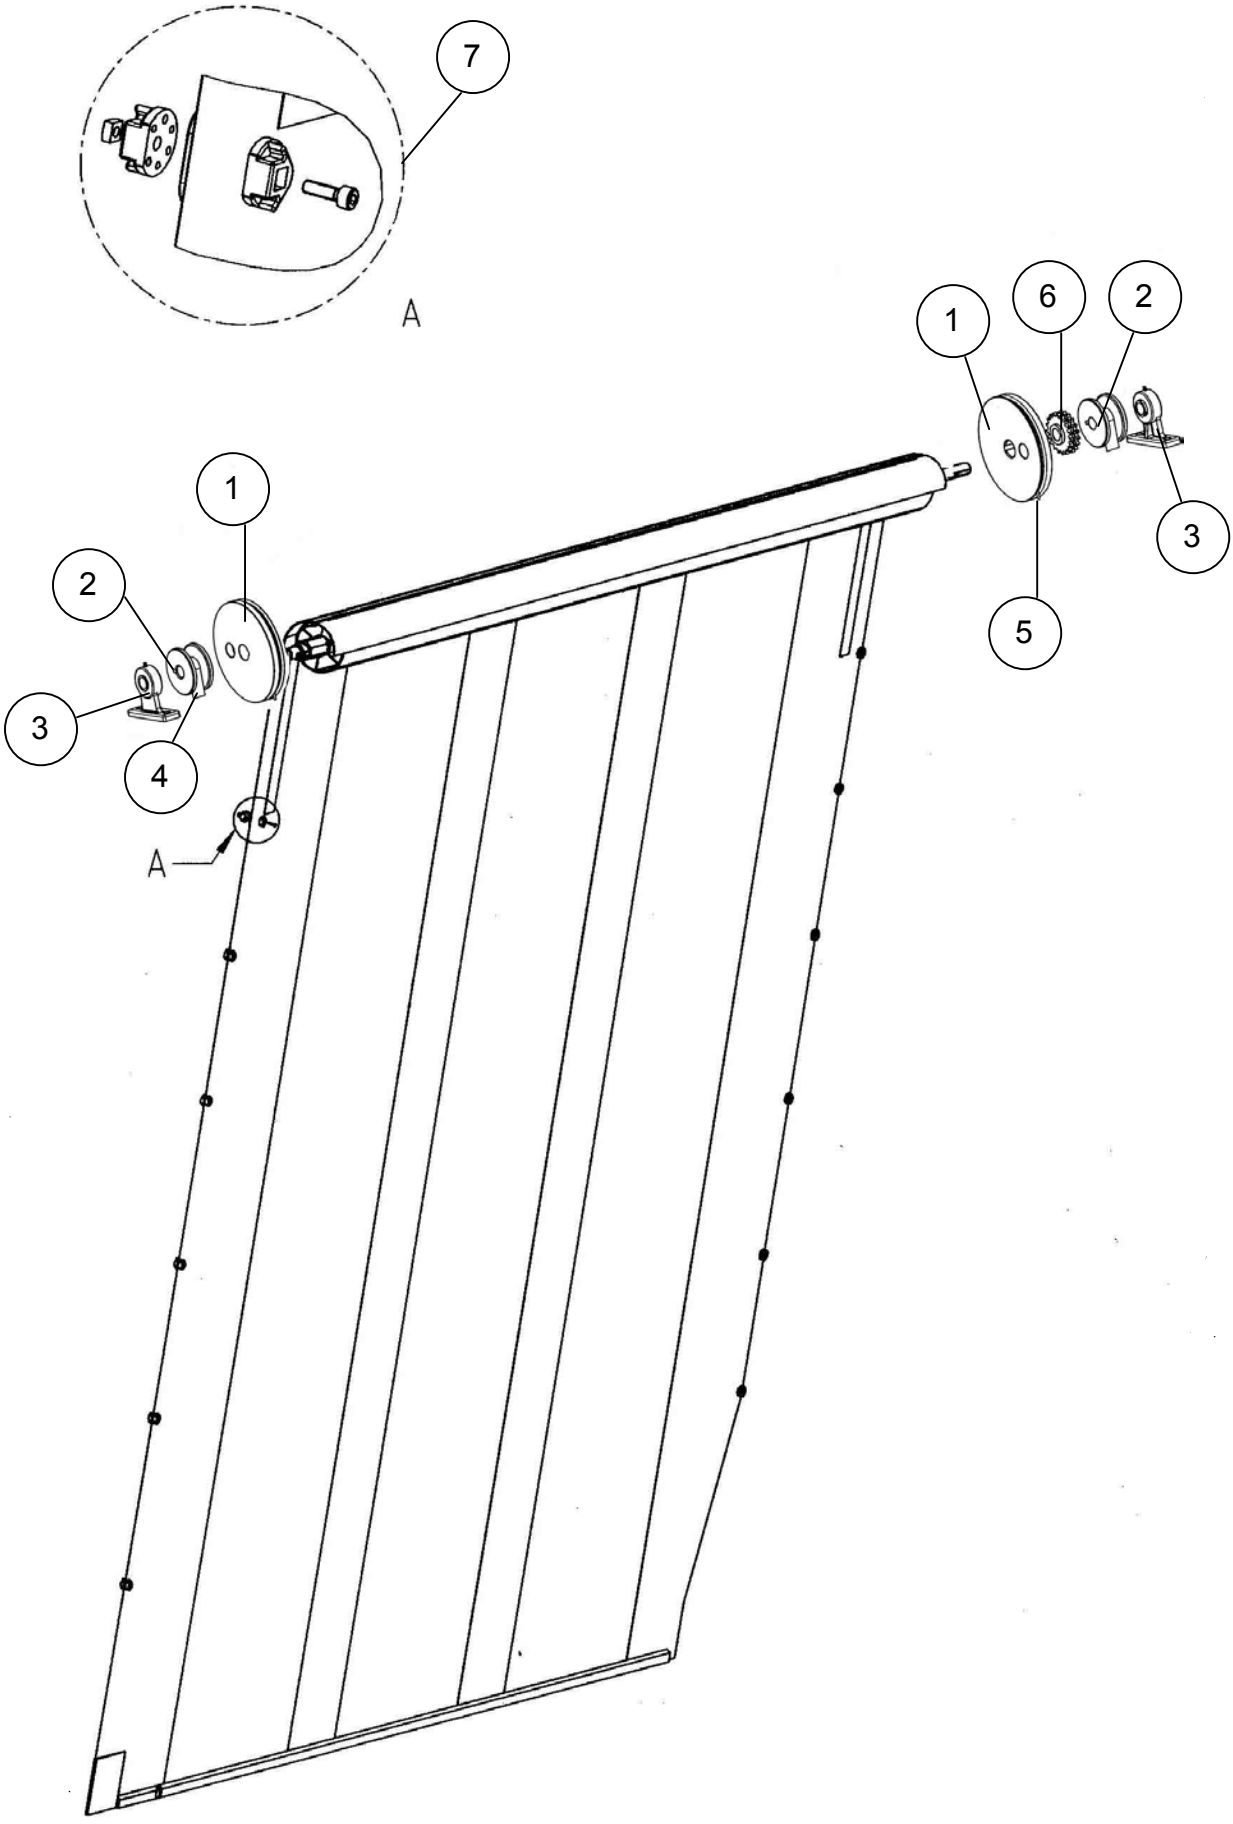



ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| III | **Toproll with curtain** | | | | | | | | |
| | | | | | | | | | |
| | Toproll aluminium with curtain | 450 | | D8240014 | G | C | | 1 | |
| | Baseprice | | | | | | Stck./pc. | | |
| | | | | | | | m/w | | |
| | PVC | 450 blue or red | | | | | $m^2$ | | |
| | PVC | 450 special colour | | | | | $m^2$ | | |
| | RollTex-Plus without window | 450 grey, orange, blue | | | | | $m^2$ | | |
| | window horizontal | | | | | | Stck./pc. | | |
| | window vertical | | | | | | Stck./pc. | | |
| | Toproll aluminium without curtain | 450 only for export | | D8240013 | G | B | m/w | 1 | |
| | Toproll steel with curtain PVC | 600/600G 450EX/600EX | | D8240018 | G | D | | 1 | |
| | Baseprice | | | | | | Stck./pc. | | |
| | Toproll | | | | | | m / w | | |
| | PVC blue or red | | | | | C | $m^2$ | | |
| | PVC special colour | | | | | | $m^2$ | | |
| | RollTex-Plus without window | 600/600G grey, orange, blue | | | | C | $m^2$ | | |
| | window horizontal | | | D8240014 | | | Stck./pc. | | |
| | window vertical | | | D8240014 | | | Stck./pc. | | |
| | Toproll steel without curtain | 600/600G 450EX/600EX only for export | | D8240015 | G | C | m/w | 1 | |
| | Curtain PVC | blue or red only for export | | D8230RG015 | G | C | $m^2$ | 1 | |
| | RollTex-Plus without window | grey, orange, blue not for 450EX/600EX only for export | | D8230310 | G | C | $m^2$ | 1 | |
| | RollTex-Plus with window | | | D8230310 | G | C | | 1 | |
| | Baseprice | | | | | | $m^2$ | | |
| | window horizontal | | | D8240014w | | | Stck./pc. | | |
| | window vertical | | | D8240014w | | | Stck./pc. | | |
| 1 | Rope pulley Ø130 | 450/600 450EX/600EX H <= 4500 | | D4701R0228 | | A | Stck./pc. | 2 | |
| | Rope pulley Ø125 | 600 450EX/600EX H > 4500 mm | | D4701R0229 | | A | Stck./pc. | 2 | |
| | Rope pulley Ø160 | 600G | | D4721063 | | A | Stck./pc. | 2 | |
| 2 | Belt pulley Ø40 | | | D4701131 | | A | Stck./pc. | 2 | |
| 3 | Pedestal bearing | | | D5103063 | | A | Stck./pc. | 2 | |
| 4 | Belt, raw cut to size | | | D5105006 | G | A | m /door height | 1 | x |
| | Belt, raw cut to size | 450EX/600EX | | D5105008 | G | A | m /door height | 1 | x |
| 5 | Rope d=5mm, L=24000mm | | | D5105R0035 | | A | Stck./pc. | 2 | x |
| | Rope d=4,55mm, L=24000, yellow | only with plastic pulley | | D5105R0080 | | A | Stck./pc. | 2 | x |
| 6 | Chain weel | | | D5101R0091 | | A | Stck./pc. | 1 | |
| 7 | Windbreaktap (12 pcs) | | | D8130R0009 | | A | Satz/Set | max 2 | x |
| | Intermediate plates red | min. 10 pcs. | | D4050R0017 | | A | Stck./pc. | max 20 | |
| | Intermediate plates blue | min. 10 pcs. | | D4050R0016 | | A | Stck./pc. | max 20 | |

| | |
|---|---|
| Bottom profile pre-running Photocell | 450, 600, 600G |
| Abschlußprofil vorl. Lichstschranke | 450, 600, 600G |
| | |
| | |

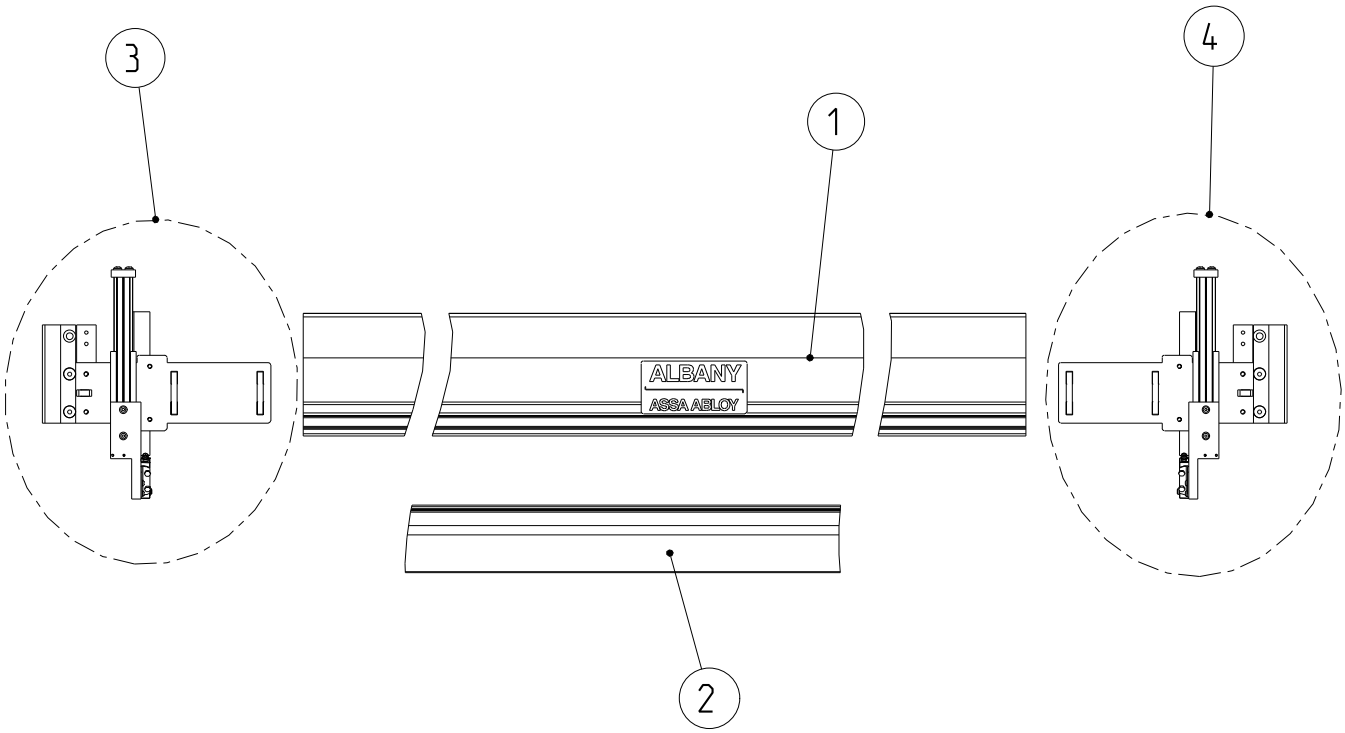

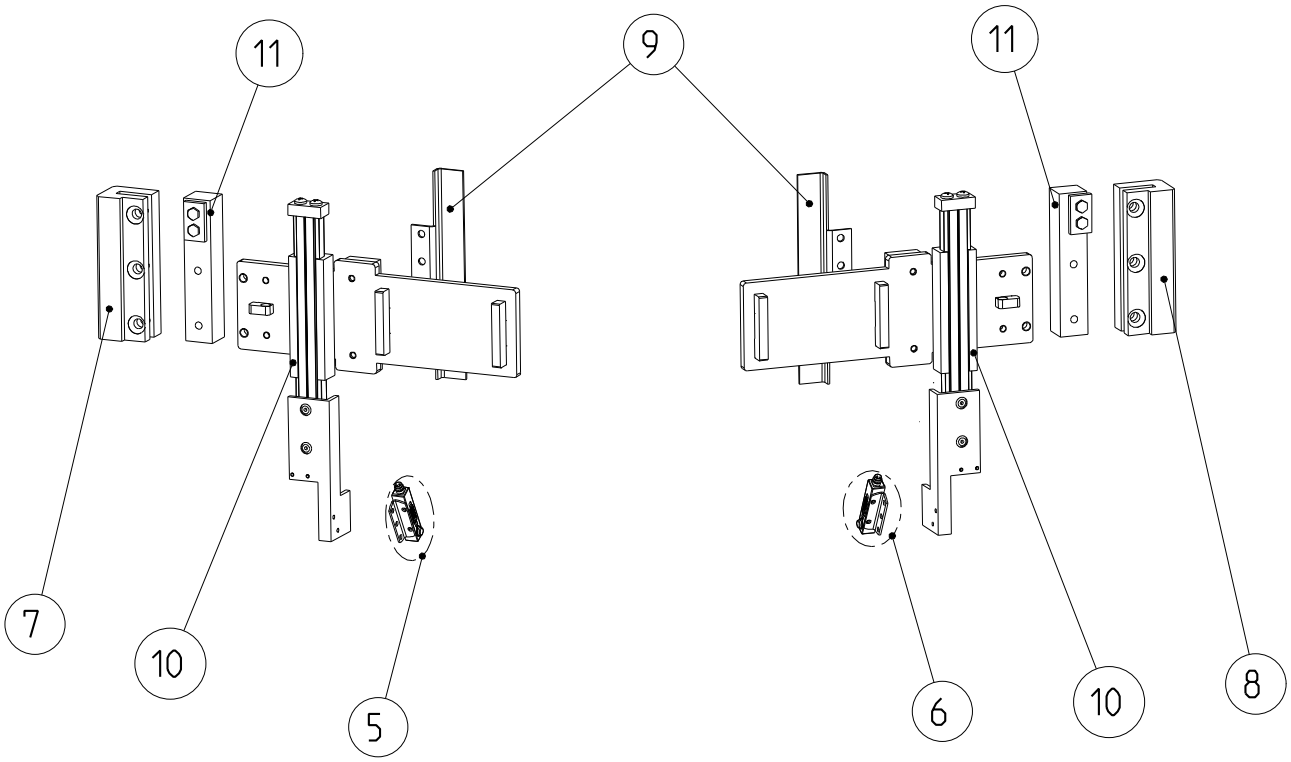
ALBANY
ASSA ABLOY


RR 450, Version 35


| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **IV** | **Bottom profile** | | | | | | | | |
| | | | | | | | | | |
| | Bottom profile cpl. with advanced photocell | 450/600/600G | | D8550013 | G | B | m | 1 | |
| | Bottom profile cpl. with contact edge | 450/600 | | D8550012 | G | B | m | 1 | |
| | Bottom profile cpl. with contact edge | 450EX/600EX | | D8550027 | G | B | m | 1 | |
| 1 | Bottom profile cut to size | 450 | | D4701098 | G | B | m | 1 | |
| | Bottom profile cut to size | 600/600G | | D4701195 | G | B | m | 1 | |
| | Bottom profile cut to size | 450EX B<=4500 | | D4701214 | G | B | m | 1 | |
| | Bottom profile cut to size | 600EX B<=4500 | | D4701215 | G | B | m | 1 | |
| 2 | Rubber profile with integrated safety edge | Safety edge, integrated sealing to sideframe | | D8550RG073 | G | B | m | 1 | |
| | Rubber profile elongated sealing-lilp | | | D8550RG074 | G | C | m | 1 | |
| | Rubber profile for prerunning photocell | Prerunning photocell, integrated sealing to sideframe | | D8550RG075 | G | B | m | 1 | |
| | Rubber profile for prerunning photocell, elongated sealing-lip | | | D8550RG076 | G | C | m | 1 | |
| | Rubber profile | 450EX/600EX | | D4402070 | G | B | m | 1 | |
| | Rubber profile elongated sealing-lilp | 450EX/600EX | | D4421022 | G | C | m | 1 | |
| | Safety edge | 450EX/600EX | | D8940001 | G | B | m | 1 | |
| 3 | LH sliding part | 450EX/600EX, for safety edge | | D8450022 | | A | Stck./pc. | 1 | |
| | LH sliding part | 450/600/600G pre-running photocell (*) | ►2011-08 See Pos.12 2011-09 ► also single | D8450R0030 | | A | Stck./pc. | 1 | |
| 4 | RH sliding part | | | D8450R0029 | | A | Stck./pc. | 1 | |
| | RH sliding part | 450EX/600EX, for safety edge | | D8450021 | | A | Stck./pc. | 1 | |
| 5 | Transmitter pre-runing photocell with bracket | LH (*) | ►2011-08 just as Pos.12 2011-09 ► also single | D8420R0022 | | A | Stck./pc. | 1 | |
| | Safety photocell transmitter - red | | | D4904R0544 | | A | Stck./pc. | 1 | |
| 6 | Receiver pre-running photocell with bracket | RH (*) | | D8420R0024 | | A | Stck./pc. | 1 | |
| | Safety photocell receiver - grey | | | D4904R0546 | | A | Stck./pc. | 1 | |
| 7 | RH sliding guidance | 450/600/600G | | D4399424 | | A | Stck./pc. | 1 | |
| 8 | LH sliding guidance | 450/600/600G | | D4399424 | | A | Stck./pc. | 1 | |
| 9 | Switch pin | 450/600/600G | | D8150013 | | A | Stck./pc. | 2 | |
| 10 | Slider with screws | 450/600/600G | | D8150027 | | A | Stck./pc. | 2 | |
| 11 | End guide plate sliders | 450/600/600G | | D8150026 | | A | Stck./pc. | 2 | |
| 12 | Retrofit pre-running photocell (Transmitter+Receiver) | 450/600/600G pre-running photocell (*) | ►2011-08 required 2011-09 ► not required | D8930R0112 | | A | Stck./pc. | 1 | |

(*) Doors ordered before end of 2011/08 needs
separately Retrofit pre-running photocell (Pos. 12)
No order of single photocell possible!

| | |
|---|---|
| Bottom profile crash | |
| Abschlußprofil Crash | |
| Bottenbalk crash | |
| | |

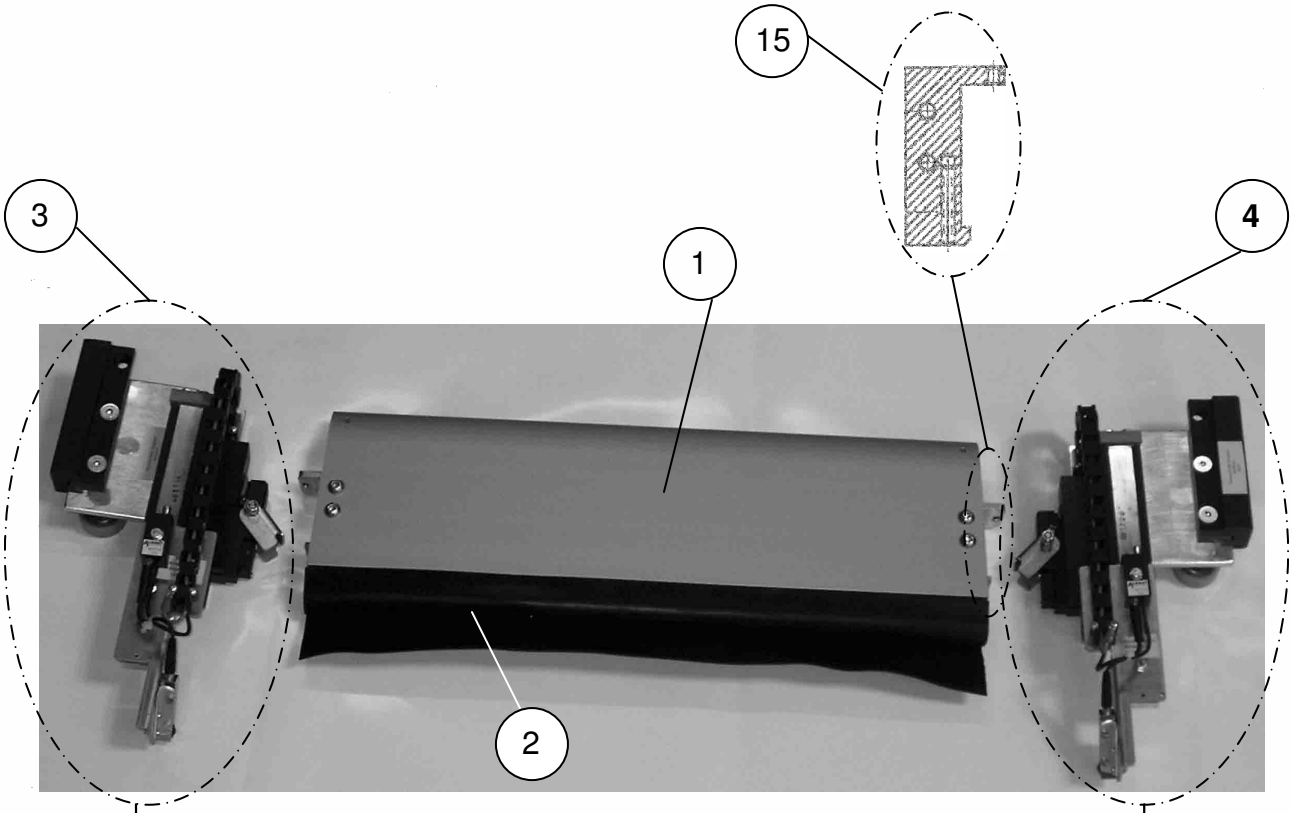

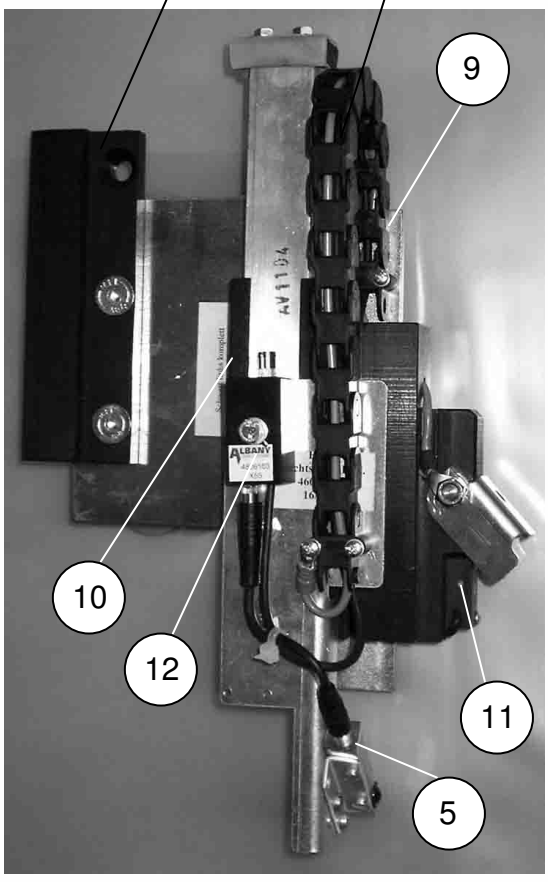
ALBANY
ASSA ABLOY

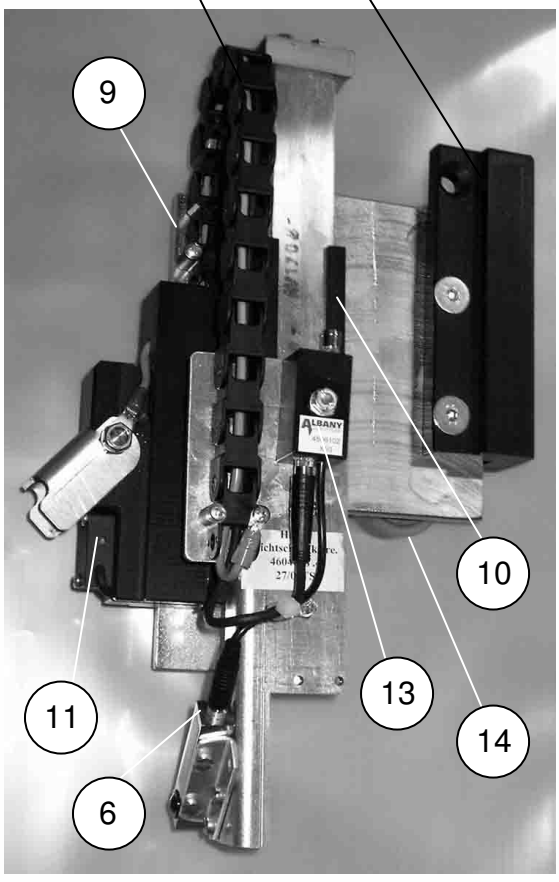
**RR 450, Version 35**

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Wear Verschleißteil part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **V** | **Bottom profil crash** | | | | | | | | |
| | | | | | | | | | |
| | Bottom profil crash cpl, with sliding parts | 450/600 | | D8550016 | G | B | m | 1 | |
| | Bottom profil crash cpl, without sliding parts | 450/600 | | D8250003 | G | B | m | 1 | |
| 1 | Bottom profil cut to size | 450 | | D4701226 | G | B | m | 1 | |
| | Bottom profil cut to size | 600 | | D4701278 | G | B | m | 1 | |
| 2 | Rubber profile for prerunning photocell | 450/600 Prerun.photocell, integrated sealing to sideframe | | D8550RG075 | G | B | m | 1 | |
| | Rubber profile for prerunning photocell, elongated sealing-lip | | | D8550RG076 | G | C | m | 1 | |
| 3 | LH sliding part crash | 450/600 LH (**) | ►2011-08 See Pos: 5, 6 2011-09 ► also single | D8450R0019 | | A | Stck./pc. | 1 | |
| 4 | RH sliding part crash | 450/600 RH (**) | | D8450R0020 | | A | Stck./pc. | 1 | |
| 5 | Transmitter pre-runing photocell with bracket | LH (**) | ►2011-08 just in pair 2011-09 ► also single | D8420R0022 | | A | Stck./pc. | 1 | |
| | Safety photocell transmitter - red | | | D4904R0544 | | A | Stck./pc. | 1 | |
| 6 | Receiver pre-running photocell with bracket | RH (**) | | D8420R0024 | | A | Stck./pc. | 1 | |
| | Safety photocell receiver - grey | | | D4904R0546 | | A | Stck./pc. | 1 | |
| 7 | Sliding guidance | 450/600 | | D8150030 | | A | Stck./pc. | 2 | |
| 8 | Flexible cable duct with cable for bottom rail | 450/600 | | D8250002 | | A | Stck./pc. | 2 | |
| 9 | Switch pin crash | 450/600 | | D4615015 | | A | Stck./pc. | 2 | |
| 10 | Sliding piece for bracket photocell | 450/600 | | D8150033 | | A | Stck./pc. | 2 | |
| 11 | Proximity switch with bracket crash | 450/600 | | D8450007 | | A | Stck./pc. | 2 | |
| 12 | LH Y-adapter with bracket | 450/600, LH | | D4910R0033 | | A | Stck./pc. | 1 | |
| 13 | RH Y-adapter with bracket | 450/600, RH | | D4910R0032 | | A | Stck./pc. | 1 | |
| 14 | Rollers | 450/600 | | D5003106 | | A | Stck./pc. | 6 | |
| 15 | Tappet cpl | 450/600 | | D8150001 | | A | Stck./pc. | 2 | X |

(**) Doors ordered before end of 2011/08 needs a pair of Transmitter/Receiver (Pos. 5, 6)

| | |
|---|---|
| Drive unit | 450, 600, 600G |
| Antrieb | 450, 600, 600G |
| | |
| | |

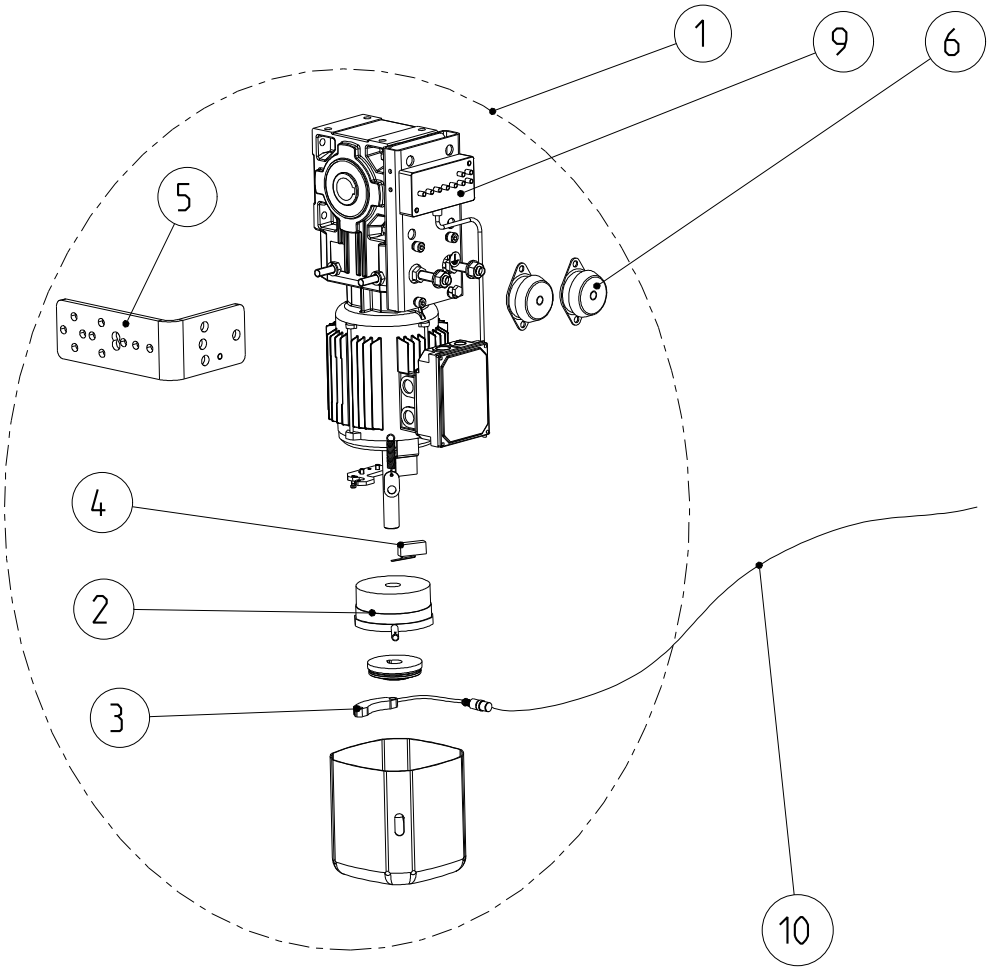

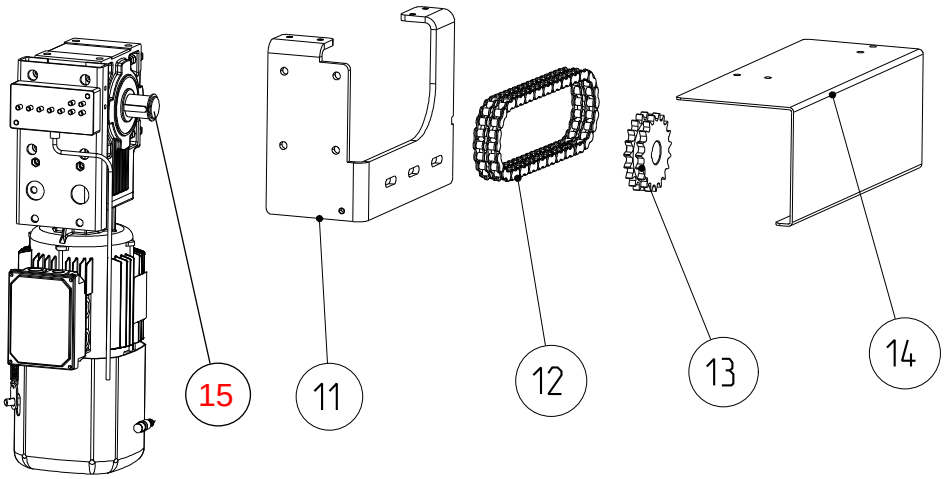



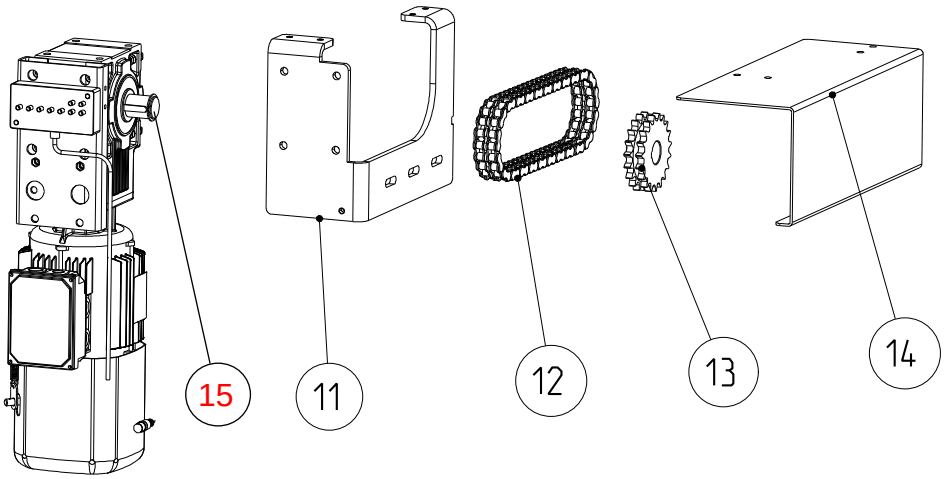
ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **VI** | **Drive Unit** | | | | | | | | |
| | | | | | | | | | |
| 1 | Drive unit without control cable | Not for MPS extra price control cable pos. 7 | | D8410065 | G | B | Stck./pc. | 1 | |
| | Drive unit without control cable for chain drive | | | D8410RG002 | G | C | Stck./pc. | 1 | |
| | Retrofit drive unit motors Flender to Bonfiglioli without control cable | | | D8410RG100 | G | C | Stck./pc. | 1 | |
| 1.1 | Gear motor<br>220-230/ 400-415V-MCC | Brake<br>6622R0018 | | D8910R0078 | | A | Stck./pc. | 1 | |
| | Gear motor<br>220-230/ 400-415V-ACS 50, 50Hz | Brake<br>6622R0018 | 2002-01 ► | D8910R0058 | | A | Stck./pc. | 1 | |
| | Gear motor<br>220-230/380-415V-PLS-G, 50Hz<br>220-230V-PLS-GT, 50Hz<br>220-230V-SPS,no control, 50Hz | Brake<br>6622R0018 | 2002-01 ► | D8910R0040 | | A | Stck./pc. | 1 | |
| | Gear motor<br>220-230/380-415V-PLS-G 60Hz<br>220-230V-PLS-GT, 60Hz<br>220-230V-SPS,no control, 60Hz | Brake<br>6622R0018 | 2002-01 ► | D8910R0043 | | A | Stck./pc. | 1 | |
| | Gear motor<br>400-415V-PLS-GT, 50Hz<br>400-415V-SPS,no control, 50Hz | Brake<br>6622R0018 | 2002-01 ► | D8910R0042 | | A | Stck./pc. | 1 | |
| | Gear motor<br>400-415V-PLS-GT, 60Hz<br>400-415V-SPS,no control, 60Hz | Brake<br>6622R0018 | 2002-01 ► | D8910R0044 | | A | Stck./pc. | 1 | |
| | Gear motor<br>220-230/400-415V-ACS 81 | Brake<br>6622R0018 | 2002-01 ► | D8910R0048 | | A | Stck./pc. | 1 | |
| | Gear motor<br>220-230/400-415V-FUS I | Brake<br>6622R0020 | 2002-01 ► | D8910R0047 | | A | Stck./pc. | 1 | |
| | Gear motor<br>für Typ 450 - MPS | Brake<br>4902044 | ► 1996-12 | D4901216 | | E | Stck./pc. | 1 | |
| 2 | Brake 15 Nm 196V DC HL | look at drive | 2002-01 ► | D6622R0018 | | A | Stck./pc. | 1 | X |
| | Brake 15 Nm 96V DC HL | look at drive | 2002-01 ► | D6622R0020 | | A | Stck./pc. | 1 | X |
| | Brake BP10GH180V DC | for 6601029,<br>6601031,<br>6601034,<br>6601036 | ► 2001-12 | D6622010 | | D | Stck./pc. | 1 | X |
| | Brake BP10NH180V DC | for 6601030,<br>6601035,<br>6601033,<br>6601037<br>4901237 | ► 2001-12 | D6622005 | | A | Stck./pc. | 1 | X |
| | Brake P10NH103V DC | for 4901228,<br>4901194<br>4901195 | ► 2001-12 | D4902045 | | A | Stck./pc. | 1 | X |
| | Brake P20/14NH103V DC | for 4901214,<br>4901197 | ► 2001-12 | D4902046 | | A | Stck./pc. | 1 | X |
| | Brake P20/14GH103V DC | for 4901225 | ► 2001-12 | D4902048 | | D | Stck./pc. | 1 | X |
| | Brake P10GH IP65 gekapselt | for 4901208 | ► 2001-12 | D4902041 | | A | Stck./pc. | 1 | X |
| | Brake P5NH103V DC | for 4901216 | ► 2001-12 | D4902044 | | A | Stck./pc. | 1 | X |
| 3 | Double Proximity switch for control ACS 80 | FUS, ACS 60/80 | | D4905R0019 | | A | Stck./pc. | 1 | |
| | Encoder 50 pulses, only electronic part | MCC | | D4904R0450 | | A | Stck./pc. | 1 | |
| | Encoder 50 pulses cpl | MCC | | D8410R0066 | | A | Stck./pc. | 1 | |

| | |
|---|---|
| Drive unit | 450, 600, 600G |
| Antrieb | 450, 600, 600G |
| | |
| | |

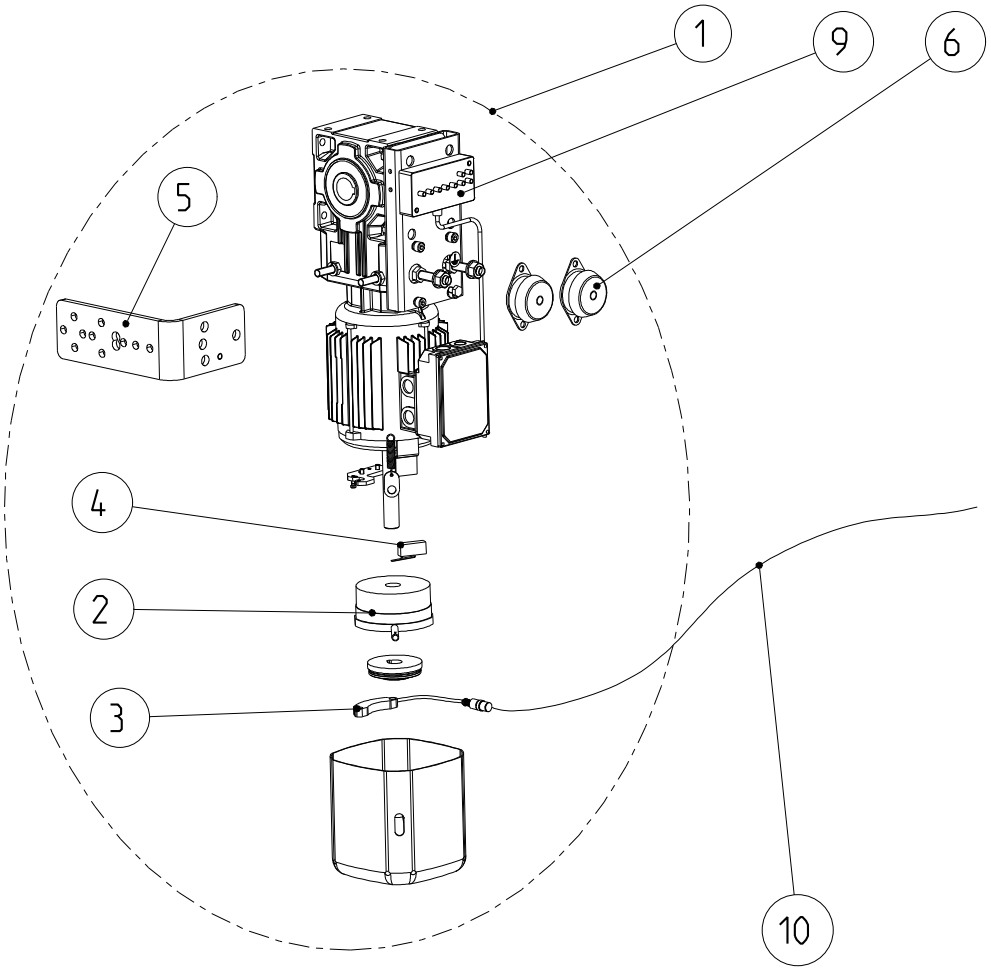





ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **VI** | **Drive Unit** | | | | | | | | |
| | | | | | | | | | |
| 4 | Microswitch, Flender | For Flender Drive | | D4905005 | | A | Stck./pc. | 1 | |
| | Microswitch, Bonfiglioli | For Bonfiglioli Drive | | D6621R0002 | | A | Stck./pc. | 1 | |
| 5 | Torque arm | | | D4521R0776 | | A | Stck./pc. | 1 | |
| 6 | Dumper | | | D5004R0041 | | A | Stck./pc. | 1 | |
| 7 | Control cable | ACS 50 | | D8903RG144 | G | B | | 1 | |
| | | Base price | | | | | Stck./pc. | | |
| | | Upcharge | | | | | m | | |
| | Control cable | MPS, ACS 80 | | D8830032 | G | B | | 1 | |
| | | Base price | | | | | Stck./pc. | | |
| | | Upcharge | | | | | m | | |
| | Control cable | MCC | | D8903RG145 | G | B | | 1 | |
| | | Control close to drive | | | | | Stck./pc. | | |
| | | Control wall mounted | | | | | Stck./pc. | | |
| 8 | Set of plugs for FUS controls | | | D8807001 | | B | Stck./pc. | 1 | |
| | Set of plugs for FUS II controls | | | D8807010 | | B | Stck./pc. | 1 | |
| | Set of plugs for ACS80 controls | see SPL Controls | | | | | Stck/pc | 1 | |
| | Set of plugs for MCC with flange plate | see SPL Controls | | | | | Stck/pc | 1 | |
| 9 | Splitter box 7-socket with 6m cable | | | D4802071 | | A | Stck/pc | 1 | |
| | Splitter box 7-socket with 11m cable | | | D4802076 | | A | Stck/pc | 1 | |
| | Splitter box 7-socket with 21m cable | | | D4802077 | | A | Stck/pc | 1 | |
| | Splitter box 9-socket with 6m cable | | | D4906R0027 | | A | Stck/pc | 1 | |
| | Splitter box 9-socket with 11m cable | | | D4906R0028 | | A | Stck/pc | 1 | |
| | Splitter box 9-socket with 21m cable | | | D4906R0029 | | A | Stck/pc | 1 | |
| 10 | Cable 4x0,25 6,5m GY | | | D4907R0110 | | A | Stck./pc. | 1 | |
| | Cable 4x0,25 11,5m GY | | | D4907R0111 | | A | Stck./pc. | 1 | |
| | Cable 4x0,25 21,5m GY | | | D4907R0112 | | A | Stck./pc. | 1 | |
| | Cable 4x0,25 31,5m GY | | | D4907R0113 | | A | Stck./pc. | 1 | |
| 11 | Motorbracket LH | Chain drive | | D4521R0055 | | A | Stck./pc. | 1 | |
| | Motorbracket RH | | | D4521R0054 | | A | Stck./pc. | 1 | |
| 12 | Chain cpl. | | | D8110R0079 | | A | Stck./pc. | 1 | |
| 13 | Chain weel | | | D5101R0091 | | A | Stck./pc. | 1 | |
| 14 | Cover chain LH | | | D4521R0011 | | A | Stck./pc. | 1 | |
| | Cover chain RH | | | D4521R0010 | | A | Stck./pc. | 1 | |
| 15 | Drive shaft | | | D4521R0016 | | A | Stck./pc. | 1 | |

| Drive unit Ex |
| --- |
| Antrieb Ex |
| |

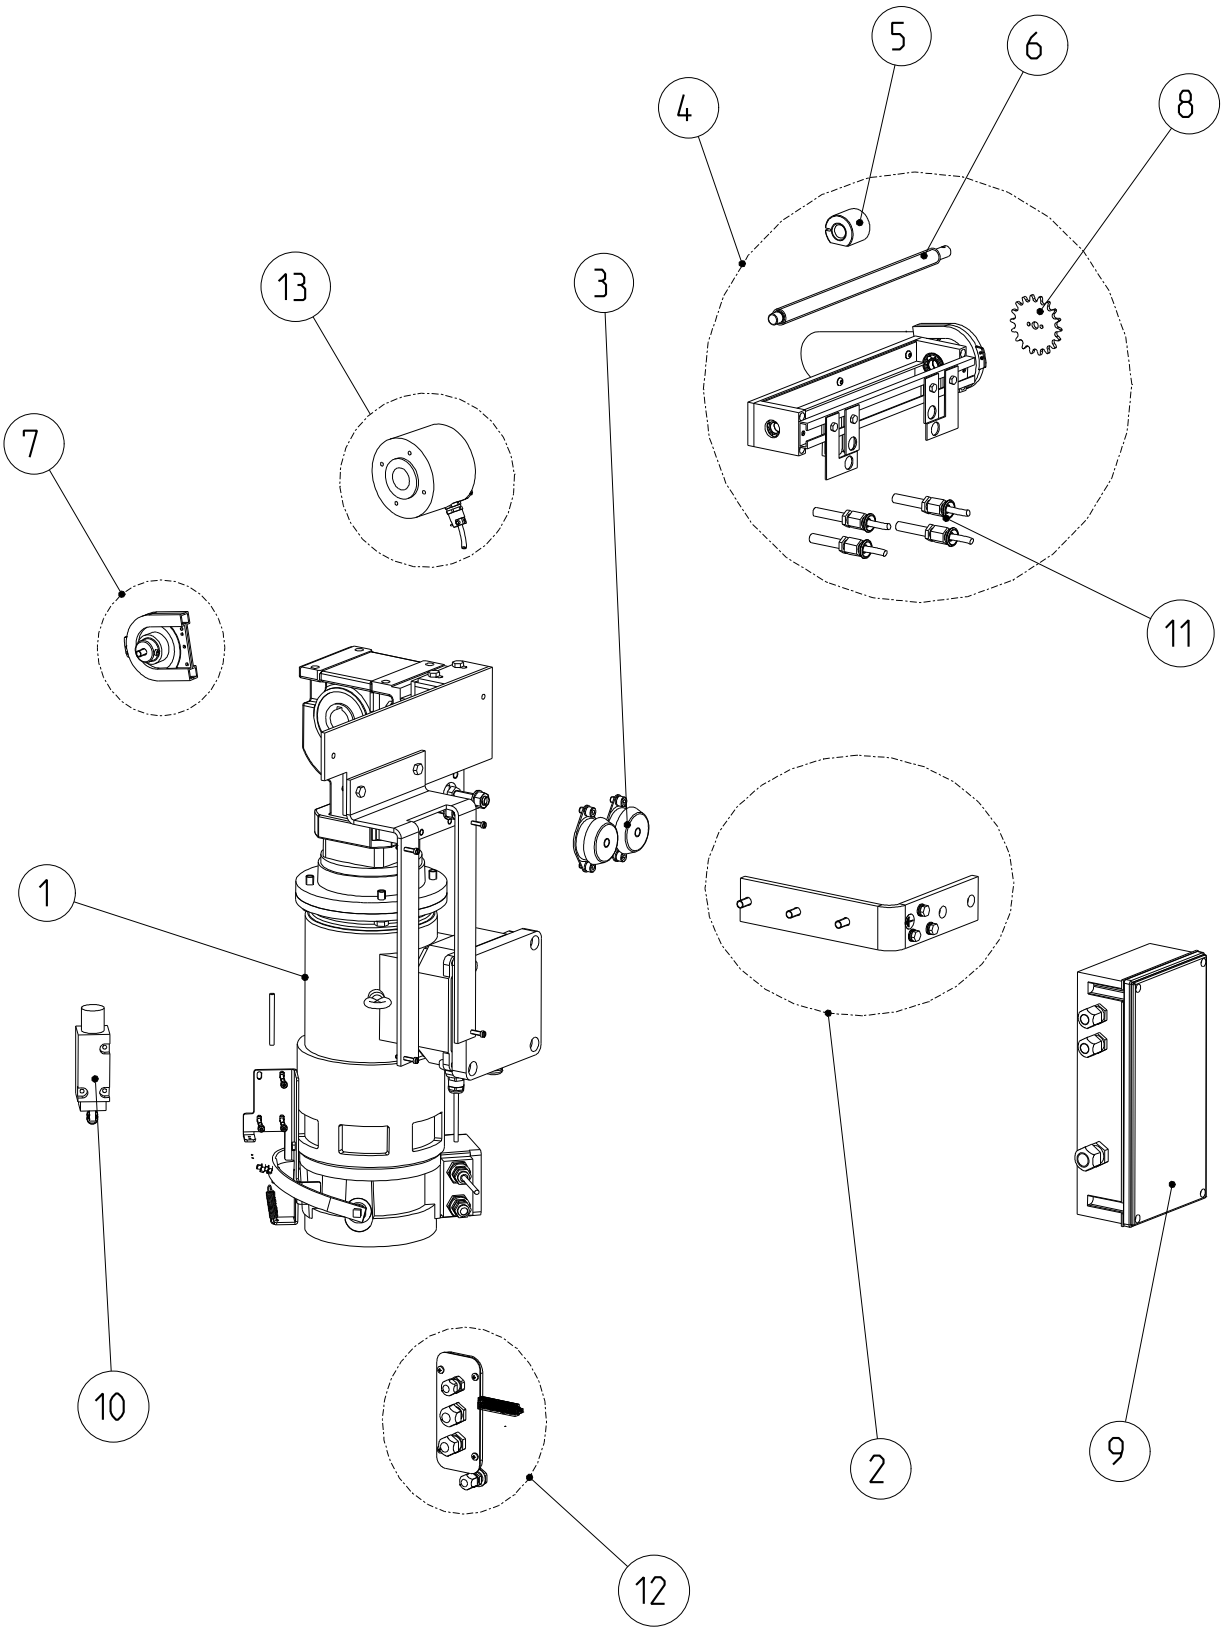



| Drawing number | 8410033 | Revision | b |
| --- | --- | --- | --- |


ALBANY
ASSA ABLOY


RR 450, Version 35


| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **VII** | **Drive Unit** | | | | | | | | |
| | | | | | | | | | |
| | Drive unit without control cable | extra price control cable pos. 12 | ACS80 | D8410033 | G | E | Stck./pc. | 1 | |
| | Drive unit MCC Ex RH without control cable | extra price control cable pos. 12 | MCC | D8410R0094 | | E | Stck./pc. | 1 | |
| | Drive unit MCC Ex LH without control cable | extra price control cable pos. 12 | MCC | D8410R0095 | | E | Stck./pc. | 1 | |
| 1 | Gear motor | ACS80, MCC | | D6601007 | | E | Stck./pc. | 1 | |
| | Motorbracket | additionally required for installation of gear motor | ► 2003-12 | D4521R1027 | | A | Stck./pc. | 1 | |
| | Drive with breake | ACS80, MCC | | D6620R0001 | | E | Stck./pc. | 1 | |
| | Gearbox | ACS80, MCC | | D6610R0001 | | E | Stck./pc. | 1 | |
| 2 | Torque arm | | | D8110011 | | A | Stck./pc. | 1 | |
| 3 | Vibration damper | | | D8110004 | | A | Stck./pc. | max. 2 | |
| 4 | Llimit switch | ACS80 | | D8410032 | | E | Stck./pc. | 1 | |
| 5 | spindle nut | ACS80 | | D4801053 | | A | Stck./pc. | 1 | |
| 6 | spindle | ACS80 | | D4801052 | | A | Stck./pc. | 1 | |
| 7 | barrel shaft | ACS80 | | D8110R0005 | | A | Stck./pc. | 1 | |
| 8 | Limit switch pinion | ACS80 | | D5101072 | | A | Stck./pc. | 1 | |
| 9 | Terminal box | | | D8802011 | | A | Stck./pc. | 1 | |
| 10 | Positional switch | | | D4801231 | | A | Stck./pc. | 1 | |
| 11 | URS magnet switch Ex spindle limit sw. | ACS80, only by first exchange | | D8410R0089 | | C | Stck./pc. | 1 | |
| | Magnet switch Ex M18 1m cable | ACS80 | | D4905R0242 | | A | Stck./pc. | 4 | |
| 12 | Control cable | ACS80 | | D8803006 | G | B | | 1 | |
| | Control cable | MCC | | D8930RG081 | G | B | Stck./pc. | 1 | |
| | | Base price | | | | | Stck./pc. | | |
| | | Upcharge | | | | | m | | |
| 13 | Set of plugs for FUS controls | | | D8807001 | | B | Stck./pc. | 1 | |
| | Set of plugs for FUS II controls | | | D8807010 | | B | Stck./pc. | 1 | |
| | Set of plugs for ACS80 / MCC controls | see SPL Controls | | | | | | | |
| 14 | Increment. shaft encoder Ex | MCC | | D4904R0503 | | A | Stck./pc. | 1 | |

| | |
|---|---|
| RR 450 | Options |
| RR 450 | Optionen |
| RR 450 | Optioner |
| | |

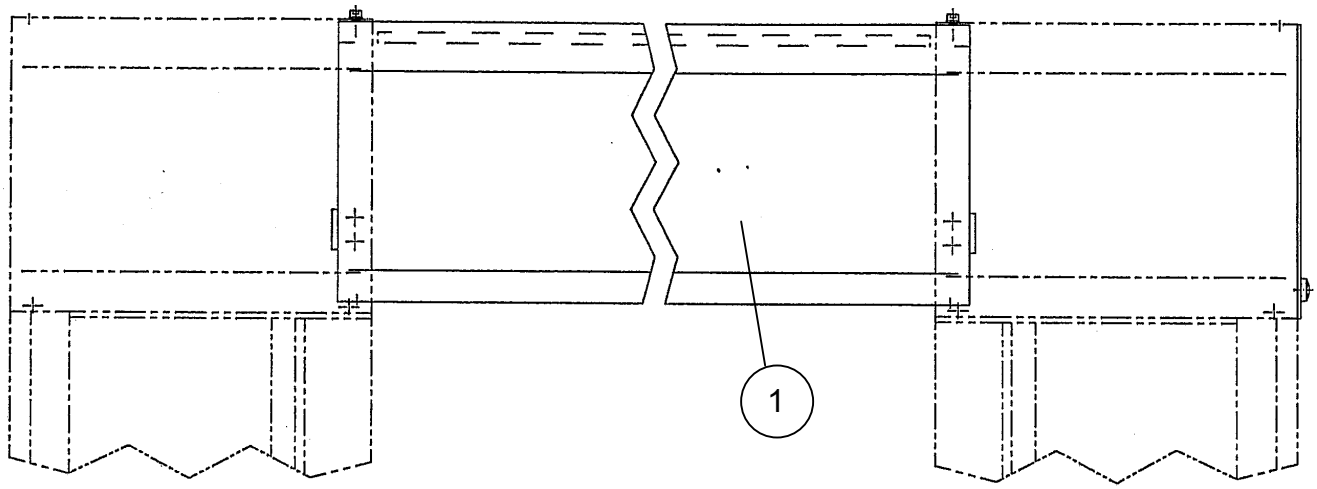

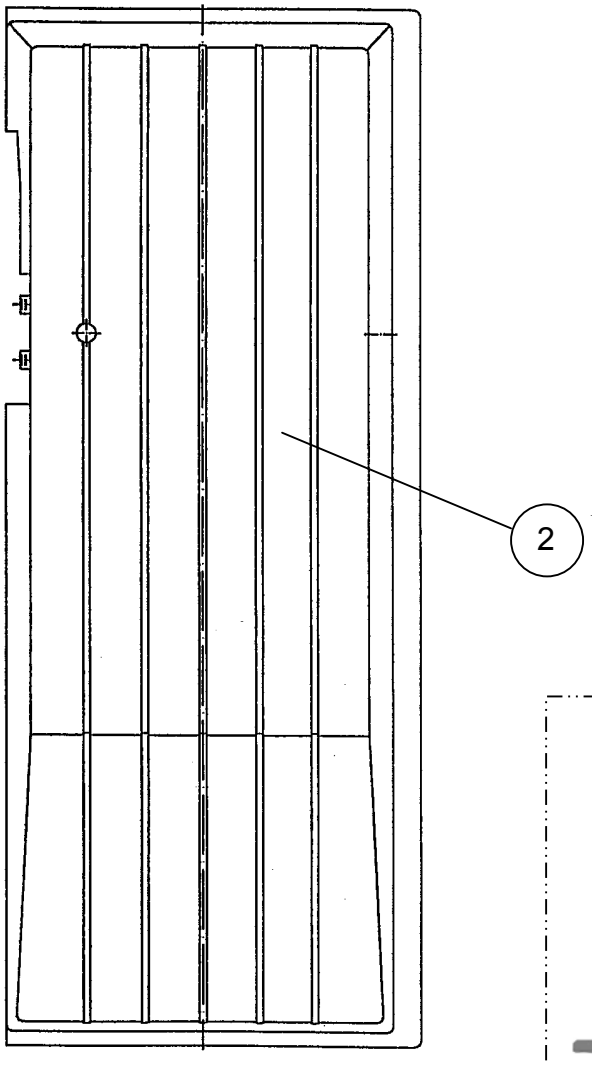


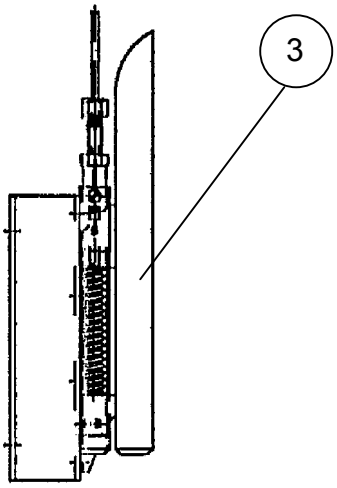
ALBANY
ASSA ABLOY

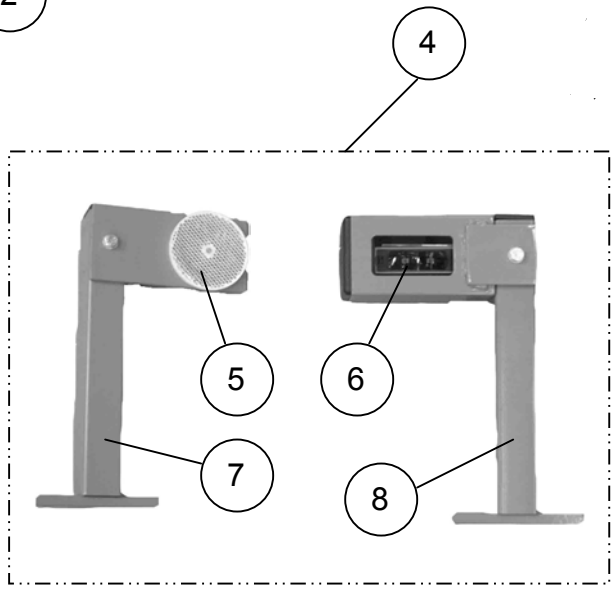RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **VIII** | **Options** | | | | | | | | |
| | | | | | | | | | |
| 1 | Top roll cover | 450/600 | | D8260007 | G | C | m | 1 | |
| | Top roll cover | 600 G | | D8260010 | G | C | m | 1 | |
| | Top roll cover for curtain ganzflächig Top | 600<br>H > 4500 | | D8260009 | G | C | m | 1 | |
| 2 | Motorcover plastic grey LH | 450/600/600G | | D8160R0081 | | A | Stck./pc. | 1 | |
| | Motorcover plastic grey RH | 450/600/600G | | D8160R0080 | | A | Stck./pc. | 1 | |
| | Motorcover plastic grey LH | 450/600;<br>MCC mounted on side frame | | D8160R0119 | | A | Stck./pc. | 1 | |
| | Motorcover plastic grey RH | | | D8160R0118 | | A | Stck./pc. | 1 | |
| | Motorcover plastic grey LH | 600G;<br>MCC mounted on side frame | | D8160R0121 | | A | Stck./pc. | 1 | |
| | Motorcover plastic grey RH | | | D8160R0120 | | A | Stck./pc. | 1 | |
| | Motor cover aluminium LH | 450EX/600EX,ACS80 | | D8160032 | | A | Stck./pc. | 1 | |
| | Motor cover aluminium RH | 450EX/600EX,ACS80 | | D8160031 | | A | Stck./pc. | 1 | |
| | Motor cover aluminium LH | 450EX/600EX, MCC | | D8160R0134 | | A | Stck./pc. | 1 | |
| | Motor cover aluminium RH | 450EX/600EX, MCC | | D8160R0135 | | A | Stck./pc. | 1 | |
| | Motor cover aluminium LH | 450/600<br>chain drive | | D8160R0003 | | A | Stck./pc. | 1 | |
| | Motor cover aluminium RH | 450/600<br>chain drive | | D8160R0002 | | A | Stck./pc. | 1 | |
| 3 | 2. emergency lever | | | D8170RG022 | | B | Stck./pc. | 1 | |
| 4 | Photocell EX with reflector and bracket | 450EX/600EX,cat.2G | | D8470009 | G | B | Stck./pc. | 1 | |
| | Photocell EX with reflector and bracket | 450EX/600EX,cat.3D | | D8470R0022 | | B | Stck./pc. | 1 | |
| 5 | Reflector white d=85 | 450EX/600EX | | D4904R0002 | | A | Stck./pc. | 1 | |
| 6 | Safety photocell EX 8m 8,2V DC | 450EX/600EX, cat.2G | | D4904217 | | A | Stck./pc. | 1 | |
| | Safety photocell EX 3D | 450EX/600EX, cat.3D | | D4904R0550 | | A | Stck./pc. | 1 | |
| 7 | Bracket reflector | 450EX/600EX | | D8170152 | | A | Stck./pc. | 1 | |
| 8 | bracke photocell | 450EX/600EX,cat.2G | | D8170151 | | A | Stck./pc. | 1 | |
| 9 | Lintel profile | | | D4521RG018 | | C | Stck./pc. | 1 | |

| | |
|---|---|
| Windbar | |
| Windsicherungsbalken | |
| Vindförstärkning | |
| | |

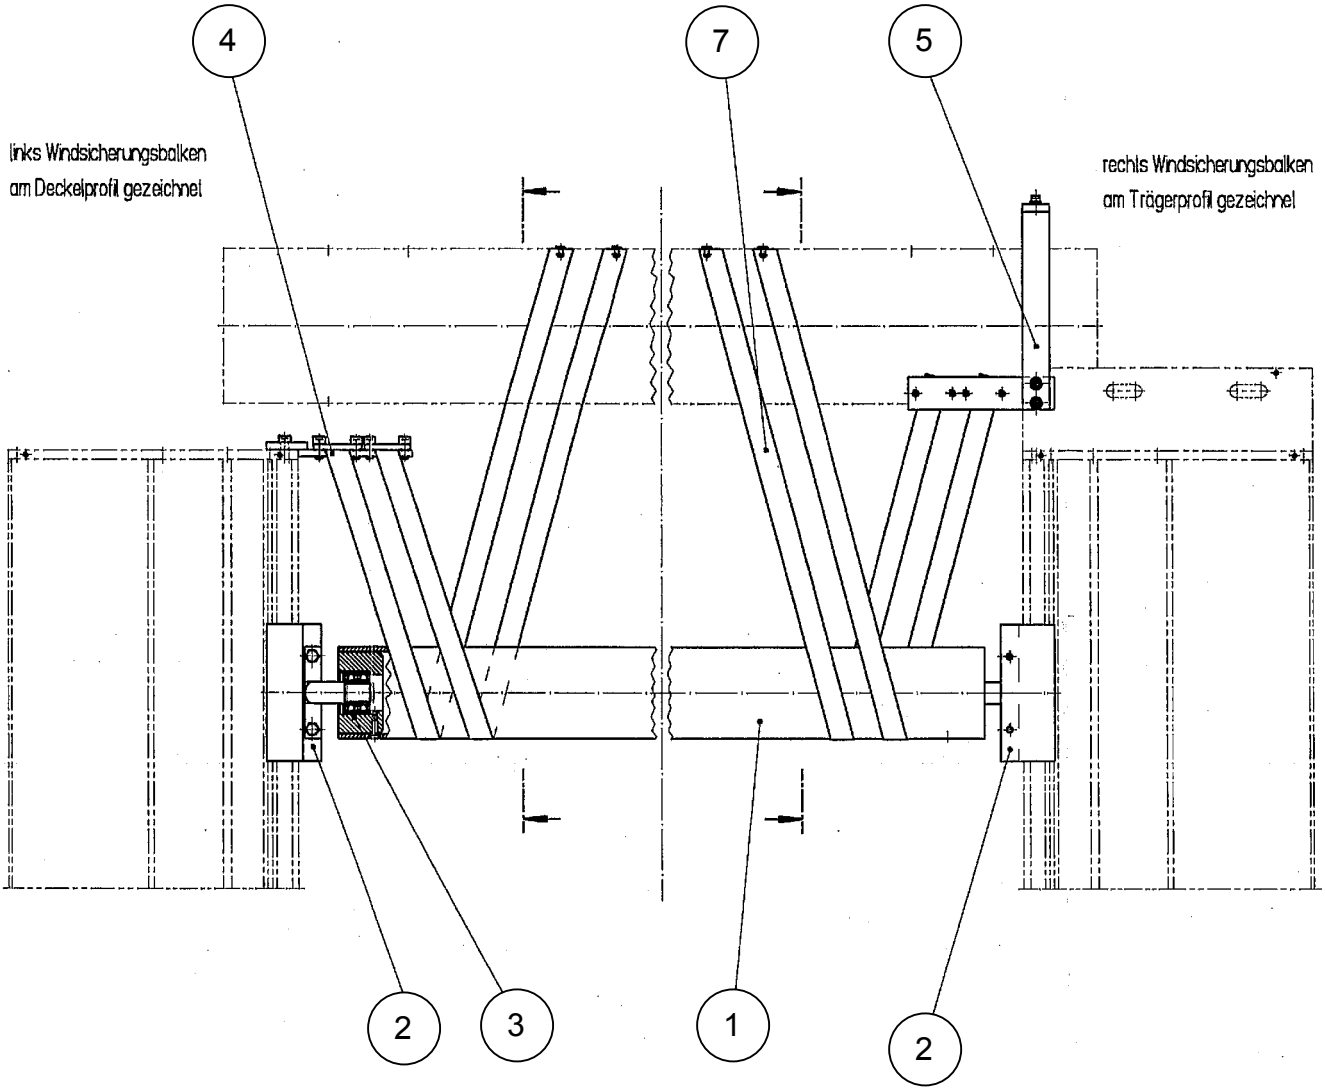

ALBANY
ASSA ABLOY

RR 450, Version 35

| Pos. Item | Description | Bemerkung Note | gültig ab ▲ gültig bis valid from ▲ valid to | Art.-Nr. Item-No | 1 | Delivery time class | Preiseinheit Price Unit | Anzahl pro Tor Quantity per door | Verschleißteil Wear part / Slitdetalje |
|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | |
| **IX** | **Windbar** | | | | | | | | |
| | | | | | | | | | |
| | Windbar cpl | | | D8270009 | G | B | | 1 | |
| | Base price | | | | | | Stck /pc | | |
| | additional per m / h | | | | | | m/w | | |
| | Rebuilding kit windbar | | | D8200011 | G | B | | 1 | |
| | Base price | | | | | | Stck /pc | | |
| | additional per m / h | | | | | | m/w | | |
| 1 | Barrel raw | | | D4701230 | G | B | m | 1 | |
| 2 | Slider | | | D8170014 | | A | Stck /pc | 2 | |
| 3 | Acceptance Windbar | | | D8170015 | | A | Stck /pc | 2 | |
| 4 | Bracket for the cover RH and LH cpl | fixed by the cover profile | | D8170016 | | A | Stck /pc | 2 | |
| 5 | Bracket for the cover LH cpl | fixed by the support profile | | D8170020 | | B | Stck /pc | 1 | |
| | Bracket for the cover LH cpl | HP600G fixed by the support profile | | D8170017 | | B | Stck /pc | 1 | |
| 6 | Bracket for the cover RH cpl | fixed by the support profile | | D8170019 | | B | Stck /pc | 1 | |
| | Bracket for the cover RH cpl | HP600G fixed by the support profile | | D8170018 | | B | Stck /pc | 1 | |
| 7 | Belt W=25mm L=9500mm | H + 3500 mm | | D5105011 | G | B | m/H | 4 | |

| | Legend |
|---|---|
| | |
| | **1** |
| G | Generic Item |
| | **Delivery time** |
| A | Within 24 hours |
| B | 2-3 Workdays |
| C | 5-8 Workdays |
| D | 10-14 Workdays |
| E | On request |
| | **Wear parts** |
| | x = Standard wear with time/use |

