



Motorized Rolling Shutter

NIHVA Provides the solution for warehouses, garages, and various industrial facilities where quick and efficient access to the opening is necessary.

The “NIHVA rolling shutter” design allows for easy control of the doorway, promoting convenience and security in a variety of applications.



General Drawing

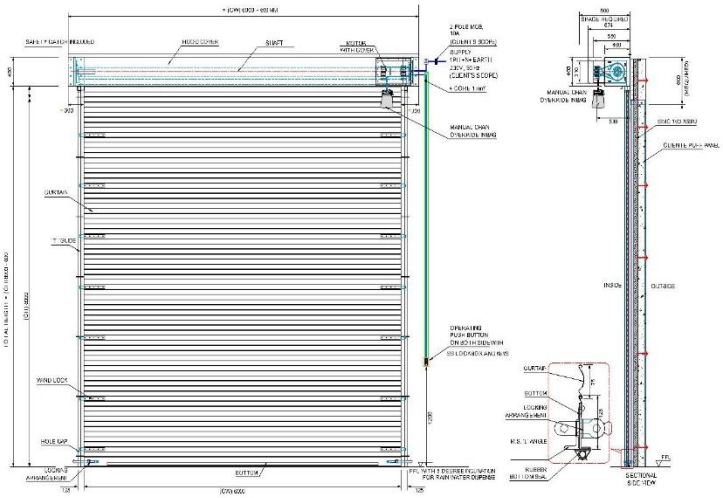



Technical Specification

Door type	Motorized Rolling Sutter
Clear Opening dimension	Depends upon dimensions.
Opening Direction	Vertical - from bottom to Top
Mounting Location area	Inside/Outside Area
Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side Guides : Optional = On Concrete/Structure / Masonry
Opening/Closing Speed	3.3 to 5 rotation/min.
Door Material	
Curtain material	GI , MS, Galvalume
Curtain Panel	The panel made of min. 1.0mm thick.
Curtain panel size	75mm wide
Curtain Profile	Corrugation/Flat
Slat Thickness	1.0 mm to 1.2 mm (As per IS 6248)
Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
Side Guide Profile	M.S." U" Shaped profile 65 mm -150 mm x 3 mm thick (as per the opening width dimension)
Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Dia -100 to 300 mm as per w x h
Side Brackets	MS Plate 3 mm to 10 mm thick , as per the opening dimension
Hood Cover	Made of GI Sheet Thickness 0.9 mm with 25x25x3mm angle stiffener
Surface finish	
Painting	2 Coats (each coat of 35 microns DFT) of EPOXY polyamide based enamel finish of approved colour and make over a Coat (each one coat 25 microns DFT) of EPOXY polyamide based red oxide zinc phosphate primer
Options Available	Perforation in Slat Profile / honeycomb Grill

Automation:

Control Type	Optional = Dead man / Pulse Control
Drive Unit & Mounting Type	Option 1) Electric Motor (Imported German Make) (Single Phase/Three Phase) - Direct Mounting on Shaft. Option 2) Electric Motor (Imported make) (single phase / three phase) - Indirect Mounting - Sprocket chain arrangement
Emergency Operation	Option = Manual Hand Driven / Chain Wheel Drive
Operating Switch	Option = Push Button from inside / Outside also. Option = Push Button / Key Switch From Outside
Integration options	Option = Need to interlock or integrate with other door or machine or Equipment
Accessories	Option = Flashing Light / Safety Photocell Option = Remote Control with receiver

NIHVA Technologies Pvt. Ltd.