



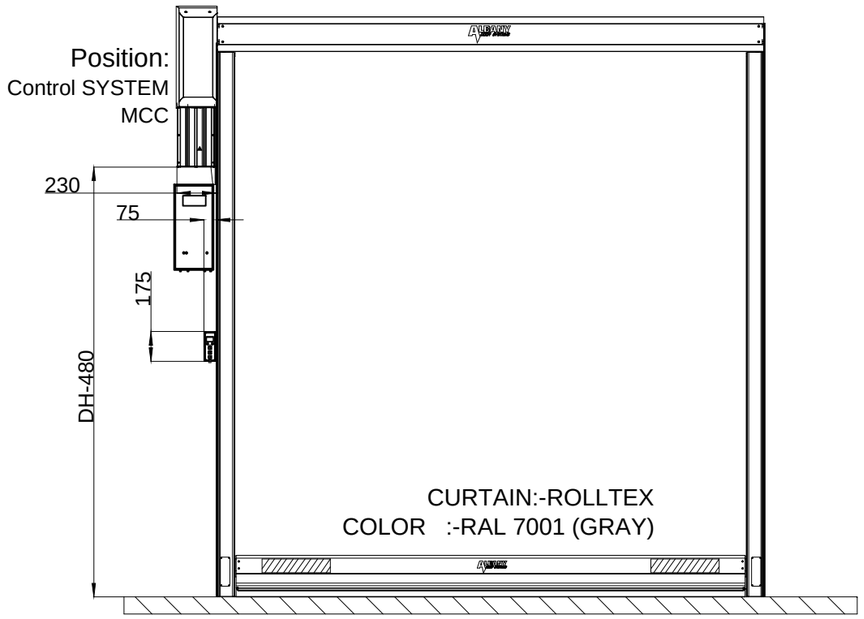


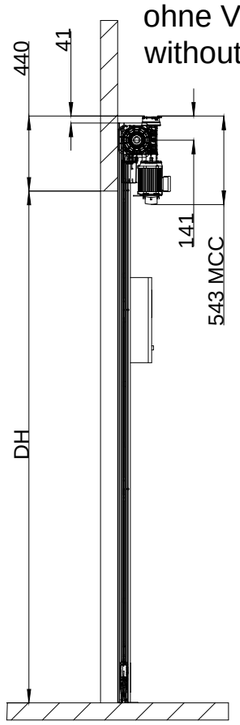


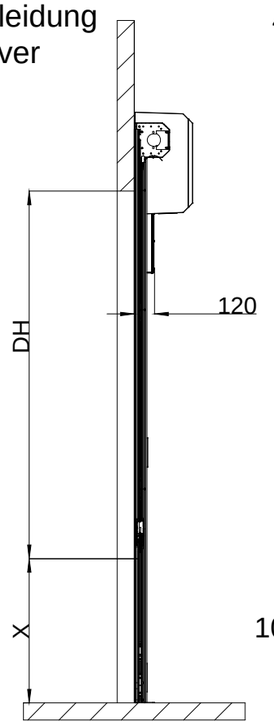

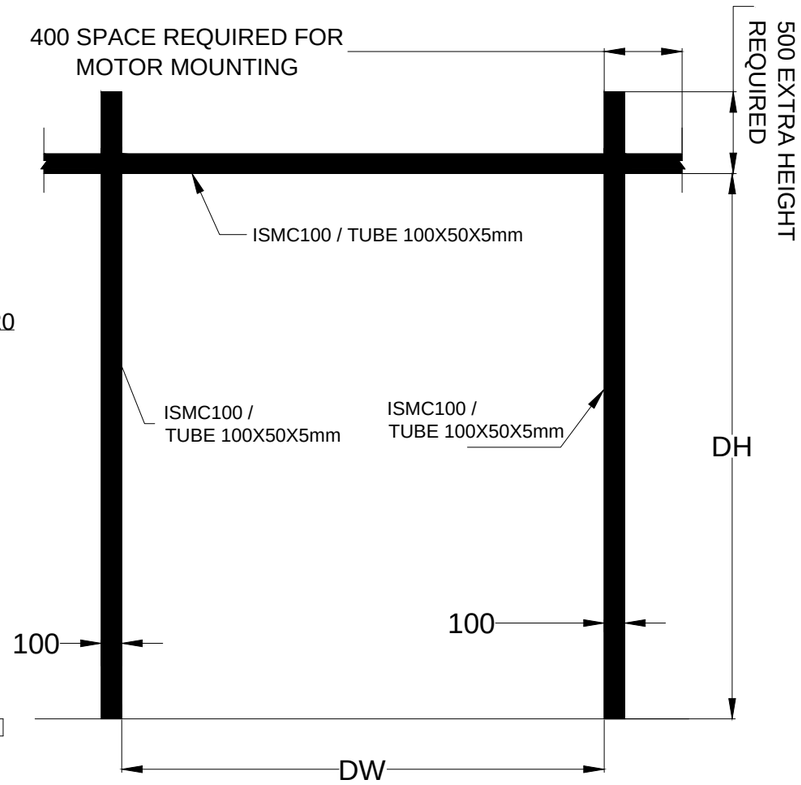

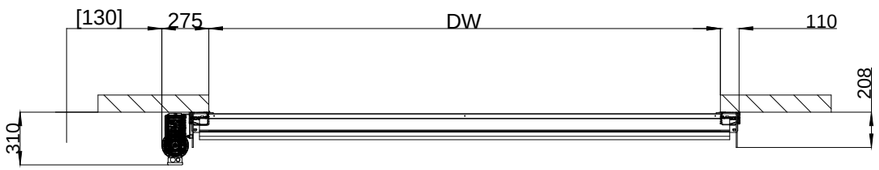

ohne Verkleidung
without cover

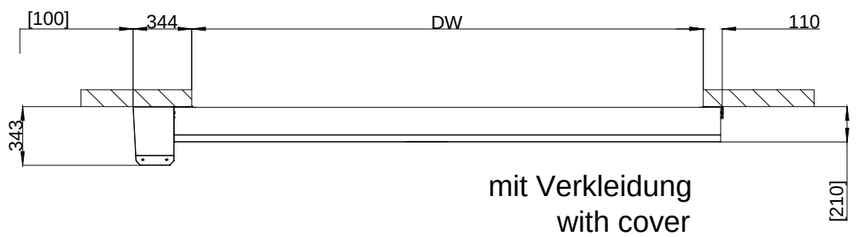

mit Verkleidung
with cover

NOTE :
1. CURTAIN : ROLLTEX.
2. COLOR : RAL 7001 (GRAY).
3. SAFETY EDGE AVAILABLE.
4. DOOR LINE (PRE RUNNING) PHOTOCELL AVAILABLE.
5. SUPPLY VOLTAGE REQUIRED : 415 VOLT, 3 PHASE (PAPL SCOPE).
6. CABLE REQUIRED : 4 CORE(PAPL SCOPE) FOR SUPPLY.
7. STD CABLE REQUIRED FOR MOTOR & PUSH BUTTON PENDENT FROM CONTROL BOX : NIHVA SCOPE.
8. STRUCTURE REQUIRED IS IN CLIENT SCOPE

Tolerance ±3 mm (for all dimensions)

Dimensions in [ ] ==> clearance for installation

CURTAIN:-ROLLTEX
COLOR : RAL 7001 (GRAY).

CLEAR WIDTH(DW)	CLEAR HEIGHT(DH)	QTY
1800mm	2200mm	01 NOS

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: HIGH SPEED DOOR RP300 & STRUCTURE

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	A.K.		24.12.18
CHECK	P.A.		24.12.18
APPV'ED	R.D.		24.12.18

CLIENT :- PAPL
PROJECT :-PAPL
LOCATION :- CHAKAN.
If any queries contact : design@nihva.com
DWG. NO. :- NIHVA/18-19/0216
REV.:- 00
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: 01 OF 01