



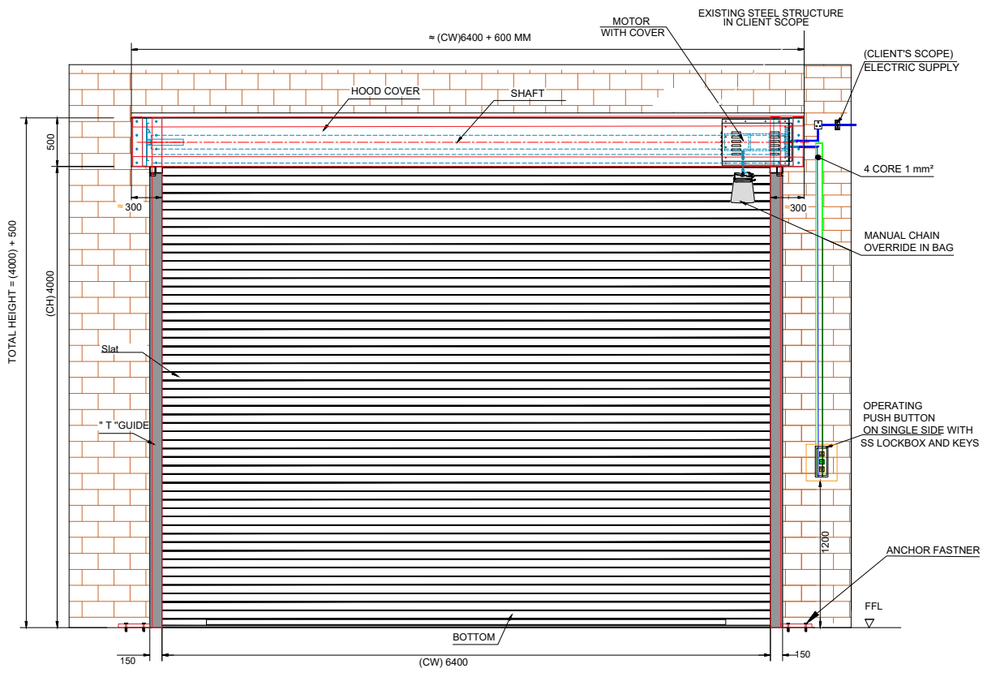

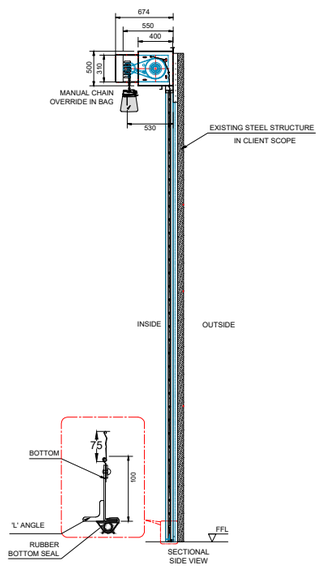

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	INDIRECT DRIVE MOTOR
2.	LOCATION AREA	INSIDE AREA / OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL+ON CONCRETE/STEEL&SIDE
4.	SLAT	75 MM WIDE - 1 MM THICK GI
5.	BOTTOM PROFILE	M.S. PLATE 100X2.5 MM THICK WITH ANGLE STIFFNER
6.	GUIDE PROFILE	M.S."T" SHAPE -150X3 MM THK .
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	COLOUR	SYNTHETIC ENAMEL
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	6400 mm	4000 mm	04

Note :-

1. All Dimension are in mm

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER			NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	NAME	DATE	CLIENT - REWARD CONSTRUCTION
DRAWN	B.S.	1/10/2025	PROJECT - MOTORISED ROLLING SHUTTER
CHECK & APPROVAL	V.T.	1/10/2025	FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/GB/2411001 REV-00
			SCALE: NTS WT: SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			If any queries contact : design@nihva.com