ASSA ABLOY Entrance Systems is a leading supplier of entrance automation solutions for efficient flow of goods and people. With our worldwide presence we offer products and services dedicated to satisfying end-user needs for safe, secure, convenient and sustainable operations. ASSA ABLOY Entrance Systems is a division within ASSA ABLOY.

ALBANY
ASSA ABLOY

www.assaabloyentrance.com

ASSA ABLOY Entrance Systems
**Albany Door Systems**

NIHVA
NIHVA Technologies Pvt. Ltd.

**www.albanydoors.com**

**QR-Code**
Get further informations by scanning the QR-code with your smartphone and a appropriate application.

64 05 R 0901 | 13 J02 EN Technical data subject to change without notice © ASSA ABLOY Entrance Systems AB. All rights reserved.

# RapidStore

## Strip curtains – an economical solution

ALBANY
ASSA ABLOY

Data Sheet

ASSA ABLOY, the global leader in door opening solutions



NIHVA

# Strip curtains RapidStore



## CHOICE OF STRIPS AND FIXING SYSTEMS

| MODEL | 2/80 | 3/60 | 3/66 | 3/100 | 4/50 | 4/60 | 4/100 |
|---|---|---|---|---|---|---|---|
| Strip size | 200 x 2 | 300 x 3 | 300 x 3 | 300 x 3 | 400 x 4 | 400 x 4 | 400 x 4 |
| Fixing type | ACD | ACD | E | ACDE | E | ACD | ACDE |
| Overlap in % | 80 | 60 | 66 | 100 | 50 | 60 | 100 |
| Overlap in mm | 80 | 90 | 100 | 150 | 100 | 120 | 200 |


## FIXING SYSTEMS

swivell mounted



rigid fixed



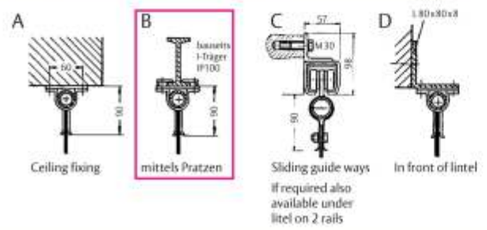


## APPLICATION

Strip Curtains are designed to be used for:

- closing of large doorways
- partitioning parts of a building with different temperature areas.
- protecting machines and installations in production areas against dust, chips, splashes, sparks, etc.

## DESIGN

The strips are made of transparent PVC.
For all models with exception of type 2/80 and plast-K for cold stores, the end strips are coloured in red for safety reasons.
All strips are individually fixed, which means that they can easily be replaced.
All metal parts are galvanised, giving them good protection against corrosion.
Supplied as self-assembly kit.

Selecting the correct strip thickness and overlapping is crucial for the effectiveness of the strip curtain.
The strip curtain RapidStore is availabel in different models. The first figure is the thickness of the strip material in mm and the second figure shows the overlapping in percent.

Example:
RapidStore 4/50:
strip thickness = 4mm, overlapping = 50%.

## SURFACE

All metal parts are galvanised.

## STRIPS

The strips are made of transparent PVC. Depending on special applications you can choose between different strip widths and strip thicknesses. Available strips width are 200, 300 and 400 mm and strip thicknesses 2, 3 and 4 mm. For safety side strips are coloured in red, exceptions are model 2/80 and plast-K for use in cold stores.

## FIXING SYSTEMS

Fixing system can be choosen between a swivel mounted with hinged shaft (model SE) or a rigid fixed version with clamping section for mounting under or in front of the lintel (model E).

| TECHNICAL DATA | RapidStore SE | RapidStore E |
|---|---|---|
| Interior door | suitable | suitable |
| Exterior door | partially suitable | partially suitable |
| Door dimension in mm<br>(DW min./max.)<br>(DH min./max.) | according to customer specification<br>6000 mm | 6000 mm |
| Surface | | |
| Side frame | galvanised steel | |
| Streifen | plast-standard type transparent with red plast side strips for safety (not for model 2/80 and plast-K) | |
| | plast-K for cold stores | |
| Fixing Systems | | |
| Fixing | swivell | rigid |
| Fixing type | hinged shaft<br>Model A,C,D | clamping section<br>Model E |
| | for mounting under or in front of the lintel | |



