



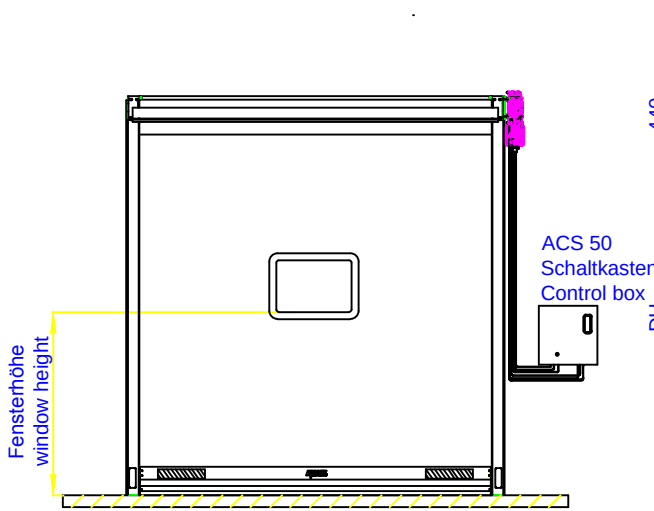


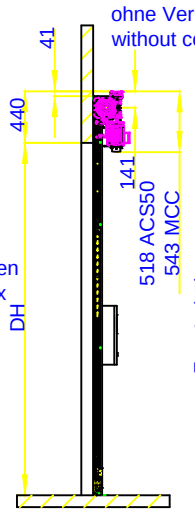

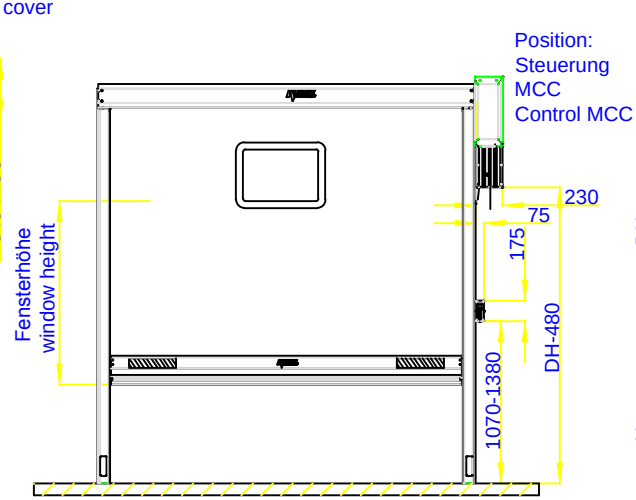


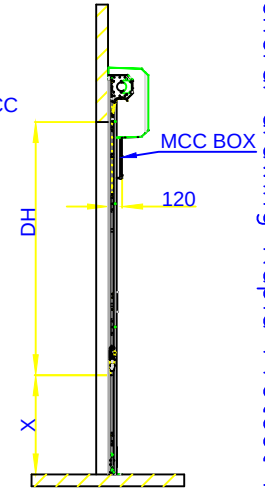

Prinzipzeichnung RapidProtect RP300
General drawing Rapid Protect RP300

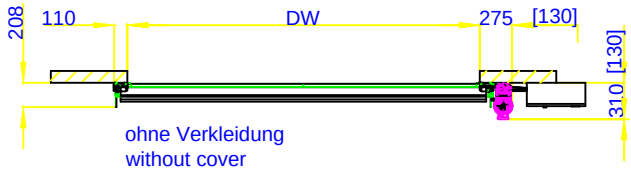


ohne Verkleidung
without cover




mit Verkleidung
with cover


"Option X-Level"
Tor schließt nicht zum Boden, sondern bis auf X-Level
Door does not close to floor, but down to X-level




jede 45°
every 45°




jede 45°
every 45°




Kettenantrieb
Chain drive




nicht möglich
not possible

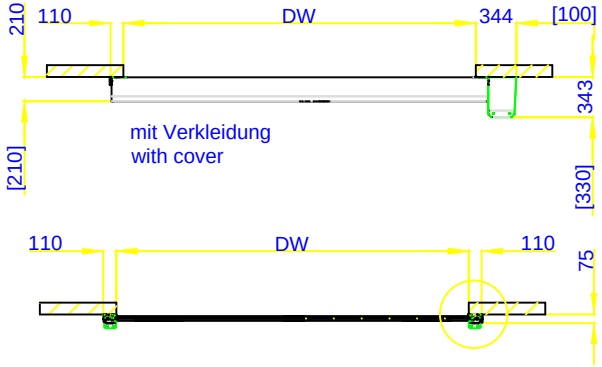

mit Verkleidung
with cover





nicht gezeichnete Motor- und Kettenantrieb Lagen auf Anfrage
drive unit- and chain drive position not drawn at request

Toleranz ±3 mm (gültig für alle Maßangaben)
Tolerance ±3 mm (for all dimensions)

Maßangaben in [ ] ==> Montagefreiraum
Dimensions in [ ] ==> clearance for installation

9300R0001/a
Stand: 2010-11-02

DIMENSION :		
CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
2900 mm	4400 mm	7 NOS

MATERIAL :

THICKNESS :

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:
RP 300
HIGH SPEED DOOR

CLIENT'S APPROVAL :

CLIENT -

PROJECT -

SITE LOCATION -

DWG. NO. : NIHVA/15-16/191

SCALE: NTS	WT:	SHEET:1 OF 1
DRAWN BY: SURAJ	DATE: 24-03-2017	
CHECK BY: SAGAR	DATE: 24-03-2017	
APPROVED BY :R.K.	DATE: 24-03-2017	

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.