Checkweighing

C3570 Checkweigher

Configurable to Suit Any Application



Intuitive Operation and Ease of Integration

Operator-friendly menu-driven set up and system configuration in 29 languages affords unmatched ease of use. System configurations are tied to individual products eliminating the need for manual system adjustments after product changeover.



Increased Performance

Production monitoring and control features to help optimize your production process and increase efficiencies. Higher production rates, better accuracy, and less downtime improve system performance and lead to increased OEE (Overall Equipment Effectiveness).



Lower Total Cost of Ownership - TCO

Under the harsh conditions of everyday production, it pays dividends to use machines that are designed specifically for the task. The open frame design promotes inspection and cleanability and a reduction in wear parts mean more production, less down time, faster ROI, and lower TOC over the life of the system.



Designed for Safety

Designed to comply with the most current global machinery safety standards and qualified by the largest consumer products companies the C3570 puts safety first. Risk assessments are a cornerstone of the design process and are available for each machine to assist the customer in developing their own task based risk assessment.



C3570 – The Ideal Solution for Packages up to 10kg

Whether you're working with light or heavy packages, cans, bags, cartons or pouches, regular or irregular shapes, the C3570 checkweigher's modular design ensures a system optimized for your individual requirements. A complete library of functional and operational package handling, production monitoring and control, and communication options allow for a custom tailored solution to meet any application.

Improved weighing performance at higher speeds permit increased efficiency. Complete line integration and ISA-TR88.00.02 communication capabilities support your continuous improvement and OEE (Overall Equipment Effectiveness) programs.

C3570
High Performance Lowest Cost of Ownership


Every element of the C3570 is designed with low Total Cost of Ownership in mind. Robust, sturdy construction for long service life, improved accuracy at higher throughput, ease of maintenance, and a complete library of software options to help to optimize your processes and improve OEE.

C3570 Product Standard Features
- METTLER TOLEDO EMFR (Electromagnetic Force Restoration) Weigh Cell Technology
- Stainless steel construction
- Open main frame structure with minimal horizontal surfaces
- Modular construction easily expands to meet system OAL requirements
- Four tube conveyor support structure
- Standard mechanical interface for all conveyor types
- Stainless steel wireway for cable routing

C3570 Optional Features
- Infeed timing and spacing conveyors
- Infeed and outfeed side grip conveyors
- Freestanding weigh conveyor
- Nose roller weigh conveyor
- Assorted reject mechanisms
- Locking reject bins
- Weigh conveyor draft shield
- Guide rails
- Fixed or movable guarding as required

XS Weighing Controller Standard Features
- UL508A Listed
- High Contrast 15.0" diagonal color touch screen user interface
- 1280 X 960 color pixel resolution; 24 bit true color
- Industrial PC with Windows™ embeded operating system (OS)
- Intuitive menu driven screen navigation
- Five weight classification zones
- 200 Product memory
- Weight data interface TCP/IP
- Data-graphic statistics with histogram for "at-a-glance" monitoring of production results
- One touch full screen weight display
- Supports 29 languages
- User configurable multi-level password protected security system
- PackML (ISA TR88.00.02) status screen
- IP69 Ingress Protection for user interface
- ProdX Inspect™ PRoSync device interface

XS Weighing Controller Options and Accessories
- Seven weight classification zones
- 400 product memory
- Weight data interface: serial
- Field Bus Interface Modules (FIM) for: Ethernet IP, DeviceNet, ControlNet, Profibus (Includes: PackML/ISA TR88.00.02 for communication of machine state information)
- METTLER TOLEDO OPC ServerDA 2.05A (Includes: PackML/ISA TR88.00.02 for communication of machine state information)

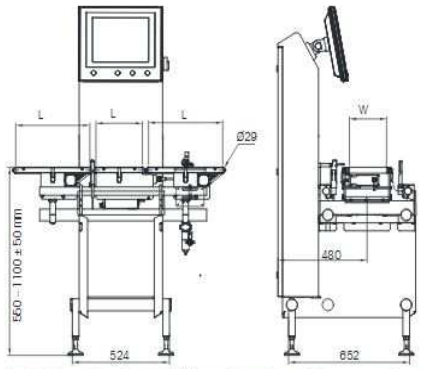

Schematic – typical dimensions in mm (L, W vary depending on the conveyor size)

- Pressure monitoring
- Four segment stack light for PackML (ISA TR88.00.02) machine status
- Five segment stack light for weight classification zones
- Feedback to fillers or other upstream devices
- Customer speed control, 0-10 VDC analog input
- Windows domain log-in
- Piece counting
- Checkweigher real time statistical process control (SPC)
- Tare/Gross systems
- Special documentation

C3570	Technical Data
Customer Power	110 V nominal (accepts from 100 V to 120 V) or 220 V nominal (accepts from 200 V to 240 V), 50/60 Hz, single phase
Construction	Anodized aluminum and stainless steel
IP Rating[1]	IP65
Weighing Technology	Electromagnetic force restoration (EMFR) weighcell
Minimum and Maximum Capacity	Up to 10,000g
Minimum and Maximum Conveyor Speed	10 m/Min; 180 m/Min
Max Throughput	400 ppm
Accuracy[2]	+/- 200 mg at 2 sigma[2]
Conveyor Height[4]	550 mm to 1100 mm +/- 50mm (21.7" to 43.25" +/- 2")
Weigh Conveyor (W x L1, L2)[5]	120 x 200, 250, 300, 400; 150 x 200, 250, 300, 400; 200 x 200, 250, 300, 400; 250 x 250, 300, 400; 300 x 300, 400
Infeed Conveyor (W x L1, L2)[5]	120 x 250, 300, 400; 150 x 250, 300, 400; 200 x 250, 300, 400; 250 x 250, 300, 400; 300 x 300, 400
Outfeed Conveyor (W x L1, L2)[5]	120 x 250, 300, 400; 150 x 250, 300, 400; 200 x 250, 300, 400; 250 x 250, 300, 400; 300 x 300, 400
Pulley Diameter	29 mm
Conveyor Belt Material	Thermoplastic Polyurethane
Air Supply	From 4 bar (60 psi) to 8 bar (115 psi)
Reject Types[4]	Air Jet, Pusher
Max Noise Level (dBA)	Less than 70 dBA at 1 m
Safety Standards in Compliance[3]	In compliance with relevant US and EU standards[3]
Standard Safety Circuit Category, max PL	Category 1 (ISO 13849-1) with PLb maximum
Approvals	UL 508A[4], OIML, DE-07-MI006-PTB037
Quality System	ISO 9001
Operating and Storage Temp Range	Operating range 0°C to 40°C per UL 508A; Storage -10°C to 60°C